



Product Datasheet

NK8000
MP3.20

NK8222 Ethernet Port for a single subsystem


The NK8222 Ethernet Port for a single subsystem is used to connect a local or distributed safety and security device to the NK8000 network. It provides a first level of centralisation, and acts as a secure communication partner for the NS8210 Network Driver of MM8000 or MK8000, and provides serial connectivity for MM8000, MK8000, or MT8001.

- The NK8222 Ethernet Port allows the connection of one SBT safety and security subsystem and 3rd party systems to NK8000 networks
- The NK8222 is best suited for distributed systems or geographical networks where a single subsystem has to be connected to a remote management system (such as bank applications: centralisation of security systems of branches)
- NK8000 safety / security networks are based on the LAN standards TCP/IP and Ethernet
- NK8000 networks are compatible with MM8000 Management Stations, MK8000 OPC Servers, and the MT8001 Management Terminal
- Interaction machine supporting logical combinations between locally connected subsystems
- NK8222 is based on a flexible, high performance hardware platform, that has been specifically designed for safety and security applications
- Supplied in a plastic box, easy to install on DIN-rails
- Optional housing solutions with autonomous power supply

Connectivity

The following NK8222 connectivity options are available:

- Simultaneous routing to up to four host stations using CMSDL/IP protocol (without encryption);
- Serial connectivity to a local host (MM8000 / MK8000 / MT8001).

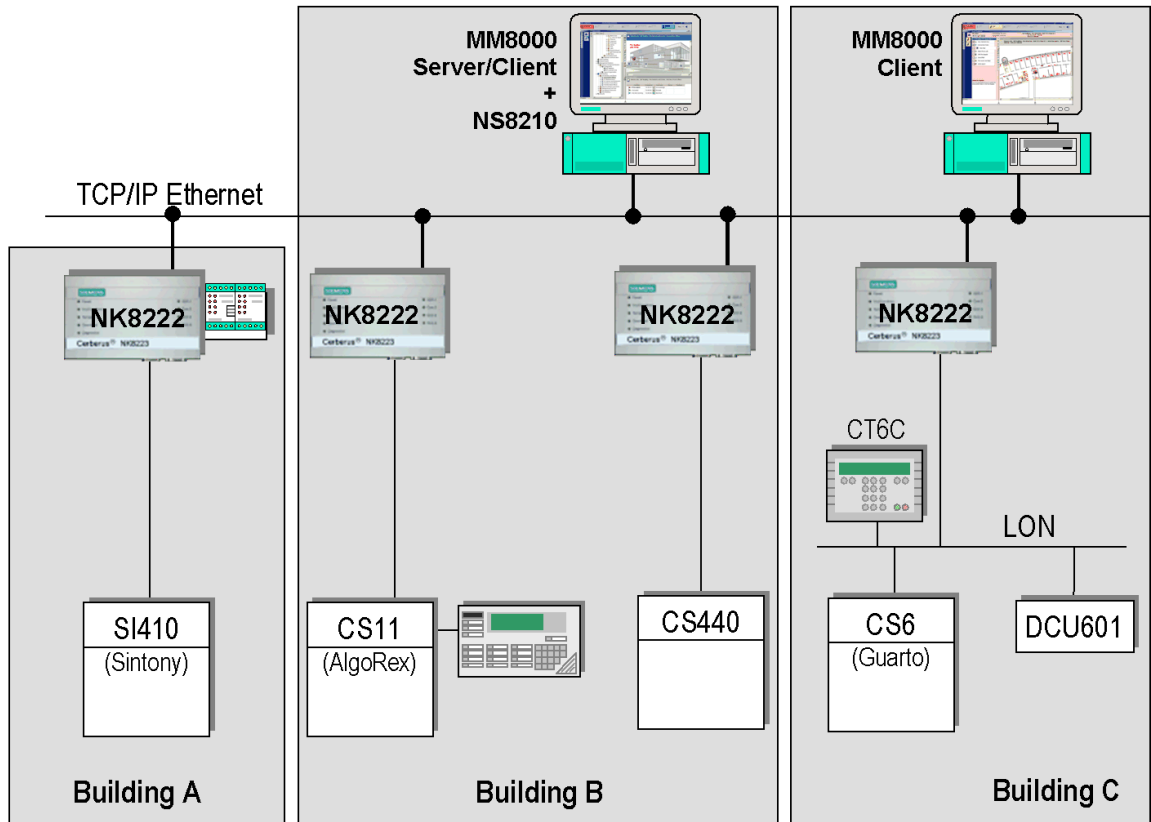

Connectivity example for a distributed system

Upstream connectivity:


- TCP/IP on Ethernet connectivity for connection to local and remote management stations (MM8000 or MK8000). Transport protocol CMSDL/IP or CEI79-5 featuring 64-bit encryption (FEAL algorithm) for high security banking applications;
- Simultaneous multiple host connectivity (up to four) using CMSDL/IP protocol (without encryption);
- Upstream serial connectivity to a local management station (MM8000 / MK8000 / MT8001) using an RS232 line via CMSDL serial protocol;
- The upstream devices (MM8000 or MK8000) must be equipped with the NS8210 Network Driver for TCP/IP on Ethernet connectivity or with the NS8012 CDI-Net Driver for serial connectivity.

Downstream connectivity:

- 1 serial connection supporting a single fire, gas, intrusion detection, CCTV, or digital I/O system
- or
- LON adapter for connecting 1 CS6 intrusion detection system.

→ For application examples, see the DMS8000 Application & Planning guide.

Internal structure

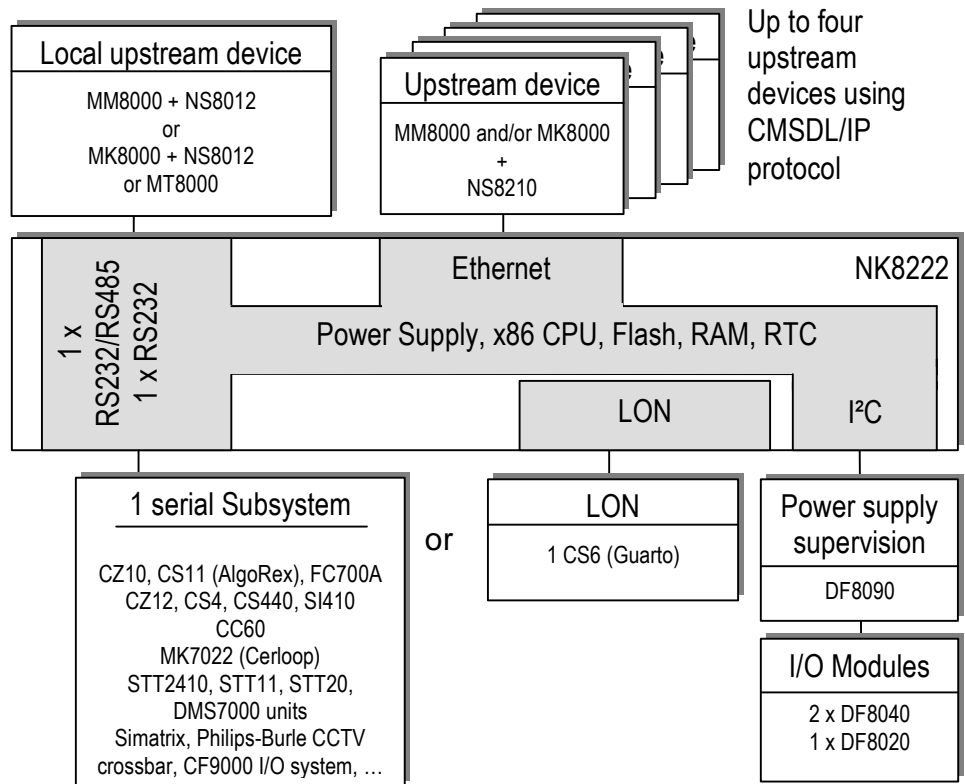

The NK8222 employs industry standard x86 CPUs and PC104 extension boards, and is composed of:

- Base board with power supply, CPU, and basic configuration of interfaces;
- Optional PC104 LON board.

The Base board is equipped with:

- Power supply;
- 2 serial interfaces (2 RS232 or 1 RS485 and 1 RS232);
- Ethernet 10Base-T interface;
- DIMM-PC / 520-I module with:
 - 32MB RAM
 - 32MB Flash disk
 - Real Time Clock (RTC)
 - Real Time Operating System (RTOS) with integrated IP protocol stack
- Flash EPROM;
- RAM;
- I²C bus;
- Diagnostic LEDs.

Configuration

Hardware configurations

The NK8222 is available in two hardware configurations:

NK8222.2

-
- 1 Ethernet line for remote host
 - 2 serial lines for a single subsystem / local host
-

NK8222.CL2

-
- 1 Ethernet line for remote host
 - 1 LON line for a single subsystem
 - 2 serial lines for a single subsystem / local host
-

Further options:

DF8040 8-input module on I²C bus

-
- 8 input (non supervised) module for acquiring digital contacts. A max of 2 modules can be directly connected to NK8222. For more connectivity (as well as for supervised inputs), it is necessary to use a CF9003 CPU on one of the serial connections.
-

DF8020 8-output relays module on I²C bus

-
- 8 output (non supervised) relay module for controlling digital contacts. Only one module can be directly connected to NK8222. For more connectivity, it is necessary to use a CF9003 CPU on one of the serial connections.
-

DF8090 power supply supervision module on I²C bus

-
- Optional module for supervising the NK8222 power supply, and detecting power failures and battery low conditions. It is not needed when NK8222 is installed in a fire or intrusion control unit whose power supply is already supervised.
-

NE8001

-
- Wall-mountable, metallic cabinet with DIN-rail, including power supply unit.
Input: 100 –240 Vac; Output: 12Vdc 4A.
-

NE8002

-
- Wall-mountable, metallic cabinet with DIN-rail.
-

Parameterisation

The NK8000 configuration is part of the Composer tool environment. To perform the SW-configuration for NK8000 market packages MP2.0 and later, a WW8000 Composer license is required.


The configuration tool includes connection parameters, as well as interaction parameters (with AND, OR, XOR, and NOT logic combinations).

Interactions

Interactions are possible between the subsystem connected directly to NK8222 and the locally connected I/O modules. Incoming messages can trigger one or more command messages to the subsystem or the I/O modules.

Note: Incoming messages can be combined with the logical operators AND, OR, XOR, and NOT.

The configuration is done via an easy to use interactions tool in Composer, and then downloaded to the NK8222.

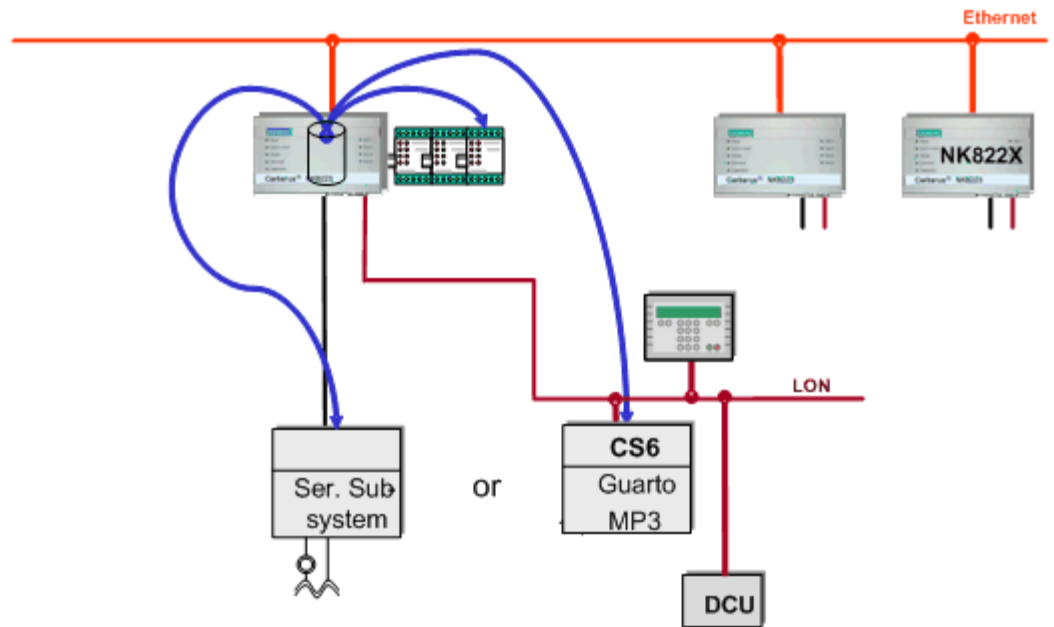

Local interactions on NK8222

DF8090 Power supply supervision module

DF8090 is an optional, external module that can be installed on the I²C bus for monitoring the NK8222 power supply. It detects the following conditions, shown on the DF8090 local panel (LEDs), and reported to NK8222 via I²C:


- Mains power failure;
- Battery low;
- Power supply failure;
- Battery protection fuse blown.

DF8090 can be installed on the DIN-rail, next to the NK8222.

Housing solutions for NK8222

NE8001 and NE8002 are compact and convenient housing solutions for NK8222 units:

- NE8001 - Metallic cabinet for easy wall-mounting, including a DIN rail and a pre-wired power supply for NK8222 and local I/O;
- NE8002 - The sole metallic cabinet.

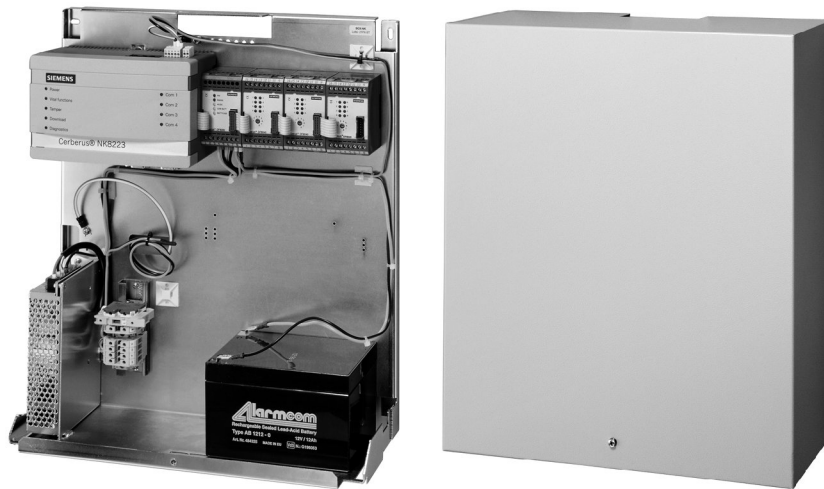

NE8001 housing equipped with NK8222 and I/O modules

Connectivity NK8222 Ethernet Port

Management Systems

| | |
|------------|---|
| RS232 line | - 1 local management station via serial line COM1: MM8000 / MK8000 / MT8001 |
| Ethernet | - 1 remote management station: MM8000 / MK8000 (using CEI 79-5 transport protocol) or - 1-4 remote management stations: MM8000 / MK8000 (using CMSDL/IP transport protocol) |

Subsystems

| | |
|---|---|
| Max. 1 subsystem | - The subsystem can be connected to the RS232-, RS485- or LON-line |
| 2 RS232 lines (1 if RS485 line is used) | - 1 subsystem |
| 1 RS485 line | - Direct connection for 1 CF9000 I/O system |
| LON line | - 1 CS6 MP3 Guarto unit |
| I ² C bus | - 1 Power Supply Supervision Module (1 DF8090) - 8 or 16 non supervised digital inputs (1 or 2 DF8040) - 8 non supervised digital relay output (1 DF8020) |

Technical data NK8222 Ethernet Port

| | | |
|---|---|---|
| Lines to local host | <p>1 RS232 line</p> <ul style="list-style-type: none"> - Transport protocol: CMSDL <ul style="list-style-type: none"> - Host (single host only): <ul style="list-style-type: none"> - MM8000 or MK8000 equipped with NS8012 CDI-Net Driver - MT8001 | Up to 9600 baud |
| Lines to remote centre | <p>1 Ethernet IEEE 802.3, 10Base-T</p> <ul style="list-style-type: none"> - Transport protocol: CEI 79-5B <ul style="list-style-type: none"> - Host (single host only): <ul style="list-style-type: none"> - MM8000 or MK8000, equipped with NS8210 Network Driver (supporting up to 100 NK822x) - FEAL 64-bit encryption or - Transport protocol: CMSDL/IP <ul style="list-style-type: none"> - Hosts (up to four): <ul style="list-style-type: none"> - MM8000 and/or MK8000, equipped with NS8210 Network Driver (supporting up to 100 NK822x) | 10Mbit/sec |
| Switched lines to remote centre (as backup line) | Not yet available | |
| Lines to subsystems | <p>LON line and 2/4 RS232 lines, protocol and baud rate options configured by NK8000- configuration tool (Composer):</p> <ul style="list-style-type: none"> - CNAP protocol (CS6 MP3) LON: 78Kbit/sec - Cerban protocol (CS114x EP5 and EP7F, CZ10, CZ12, CS4, CS440, CC60) RS232: 300 or 600 baud - Sintony serial link protocol (SI410) RS232: 9600 baud - ISO1745 protocol (Connection to Cerloop via MK7022: CS114x EP5 and EP7F, CZ10, CZ12, CS4, CS440, CC60, STT2410, STT11, STT20, DMS7000 units) RS232: 1200 or 2400 baud - ISO1745 direct protocol (CS114x, FC700A) RS232: 1200 or 2400 baud - CMXDL protocol (CF9003) RS485: 9600 baud - Burle protocol (Philips-Burle) RS232: up to 9600 baud - CDDL/CDSF (Siemens Simatrix) RS232: 2400 baud - CDDL/CDSF (other control units) RS232: up to 9600 baud - VBF (D100, SIGMASYS) RS232 4800, 9600 baud | |
| Interactions | <p>Programmable interaction programs including single or multiple triggers (incoming events) and single or multiple effects (outgoing control actions). Interactions are possible between locally connected subsystems.</p> <ul style="list-style-type: none"> - Subsystems supported: CS11 AlgoRex, CS6 MP3, SI410 Sintony, CF9000, Philips-Burle, SIGMASYS, D100 - Logical combinations: AND, OR, XOR, NOT - Delay of effects (wait): configurable 0...6500 sec. - Max. # of interactions: 1000 - Total # of field points used in triggers/effects: 5000 - Max. # of field points/interactions that can be combined in a trigger expression: 255 | |
| Ethernet data traffic | <p>Very low network load:</p> <ul style="list-style-type: none"> - Keep-alive message: 1 empty TCP/IP packet - Periodic authentication: exchange of three CEI packets with max. 30 bytes - Single alarm event: from 20 to 60 bytes | <p>Configurable, default every 30 s</p> <p>Configurable, default 10 min.</p> |
| Connectors | <ul style="list-style-type: none"> - D-Sub 9 pin, female type (for serial and modem lines) - RJ-45 connector for Ethernet - Wieland 5-pin connector for power supply and LON | |
| Cables | <ul style="list-style-type: none"> - RS232 lines: two unshielded twisted pairs - LON line: one unshielded twisted pair | <p>Cat.3 UTP, max. 15 m</p> <p>Cat.4 UTP, 22AWG</p> <p>Max 500 m (free topology)</p> <p>Max 1400 m (doubly terminated bus topology)</p> |

Detailed specifications for LON network:
<http://www.echelon.com/support/documentation/Manuals/078-0156-01G.pdf>
 Section: System Performance and Cable Selection

| | | |
|--|---|---|
| Power supply requirements | – Input voltage (DC power supply to NK8222 board) | 10-33 Vdc |
| | – Power (NK8222 processor board) | 6,34 W |
| | – Power (fully equipped NK8222) | 8,34 W |
| | – NE8001 | 100-240 Vac, 50/60Hz |
| Operating conditions | – Temperature range | 0 to 50 °C |
| | – Humidity | 10 to 95 % non condensing |
| Dimensions | – NK8222 boards | W x H [mm] 160 x 100 (Euro-size PCB) |
| | – NK8222 plastic cabinet for DIN-rail | W x H x D [mm] 180 x 108* x 80 |
| | – NK8222 in NE8001 / wall-mounted | W x H x D [mm] 385 x 450 x 150 |
| | | *Excluding connectors |
| Weight | – NK8222 boards | 0,35 kg |
| | – NK8222 plastic cabinet for DIN-rail | 0,7 kg (fully equipped) |
| | – NK8222 in NE8001 | 8,5 kg (fully equipped) |
| Digital Input | DF8040 8×Input Module (max 2 modules) | Optical coupler Inputs Max 30Vdc |
| Digital Output | DF8020 8×Output Module (1 module) | Relay contacts (NO or NC) Max 1A at 30 Vdc Relay lifetime: 100'000 cycles |
| Power Supply Supervision Module | DF8090 Power Supply Supervision Module | Supervision of power supply and battery backup |
| Regulatory Approvals (CE conformity) | EN 55022 | EMC emission |
| | EN 50130-4 | EMC immunity |
| | EN 60950-1 | LVD (NK8223 installed in NE8001) |

Disposal



This device includes electrical and electronic components and must not be disposed of as domestic waste.

Current local legislation must be observed.

Technical data DF8090 Power Supply Supervision Module

| | | |
|---------------|--|--|
| DF8090 | Power Supply Supervision Module | |
| | – Mains failure: 220 Vac missing | Battery fuse is internal to DF8090 plastic box |
| | – Battery low | Micro-fuse type: MSF 3.15A/250V |
| | – Power supply failure: trouble in AC/DC converter | |
| | – Battery protection fuse blown | |
| | – Battery: 12V, max 27 Ah | |

Technical data housings

| | | |
|--|--|--|
| NE8001 | Wall-mountable, metallic cabinet with DIN-rail support and power supply for NK8222 units | <p>The unit includes the following pre-wired units:</p> <ul style="list-style-type: none"> ● Power supply: <ul style="list-style-type: none"> – Input: 100 – 240 Vac / 50-60 Hz 2A / fuse F3.15AL / 250V / 3-pole screw connector – Output: 12Vdc 4A / two 2-pole screw connectors ● Power supply supervision: 1x DF8090 module <p>NE8001 can provide support for the following units (not included):</p> <ul style="list-style-type: none"> ● 1x NK8222 ● 2x DF8040 modules (connected via I²C) ● 1x DF8020 module (connected via I²C) ● Battery: Max. 27 Ah Recommended: FIAMM-65 mod. FG22703 (www.fiamm-gs.com) ● B3P020 392653 Mains filter 250 Vac 6A ● Z31041 496290 surge protector set 230 Vac |
| NE8002 | Wall-mountable, metallic cabinet with DIN-rail support | <p>NE8002 can provide support for the following units (not included):</p> <ul style="list-style-type: none"> ● AC/DC Power supply unit ● 1x NK8222 ● 1x DF8090 module ● 2x DF8040 modules (connected via I²C) ● 1x DF8020 module (connected via I²C) ● Battery: Max. 27 Ah Recommended: FIAMM-65 mod. FG22703 (www.fiamm-gs.com) ● B3P020 392653 Mains filter 250 Vac 6A ● Z31041 496290 surge protector set 230 Vac |
| Dimensions | NE8001/NE8002 | W x H x D [mm] 390 x 450 x 150 |
| Colour | NE8001/NE8002 | RAL7035 light grey |
| Enclosure, degree of protection | NE8001/NE8002 | Standard IP-42 (as S3G300 standard Quarto housing). |
| Environmental limits | NE8001/NE8002 | Transportation/storage: -40 to +55 °C Use: 10 to +50 °C Humidity 10 to 95%, non condensing |
| Weight | NE8002 cabinet only NE8001 cabinet with power supply NE8001 + with NK8222 (fully equipped) | 6,2 Kg 7,3 Kg 8,5 Kg |

Related Products

Note: See Sales and Technical documentation for product-specific details.

| | |
|--------------------------|---|
| NK8223 | Ethernet Port |
| NK8225 | Ethernet Port with BACnet Gateway |
| NS8210 | Network Driver (MM8000, MK8000) |
| NS8012 | CDI-Net Driver (MM8000, MK8000, MT8001) |
| MM8000 | Management Station |
| MK8000 | OPC Server |
| MT8001 | Management Terminal |
| WW8000 | Composer |
| CF9000 I/O System | Input/Output Multiplexing System (for I/O modules DF8020, DF8040, DF8045, DF8046) |

Details for ordering

| NK8222 | | Ethernet Ports MP3.15 | |
|---------------|------------|--|---|
| A6E600089 | NK8222.2 | Base module | – 1 Ethernet line for remote host – 2 serial lines for a single subsystem / local host |
| A6E600090 | NK8222.CL2 | Base module + LON extension | – 1 Ethernet line for remote host – 1 LON line for a single subsystem – 2 serial lines for a single subsystem / local host |
| | | NK8223 Demo offer | |
| A6E600131 | NK8223/DSC | NK8223 Demo suitcase for demonstration | |
| | | NK822x HW Accessories | |
| A6E600066 | NE8001 | Wall-mountable, metallic cabinet with DIN-rail | The unit includes a pre-wired power supply unit Input: 220Vac; output: 12Vdc 3A |
| A6E600067 | NE8002 | Wall-mountable, metallic cabinet with DIN-rail | Cabinet only: 385(W) x 450(H) x 140(D) mm; RAL7035 light grey; IP-42 (as S3G300 standard Quarto housing) |
| A6E600010 | DF8090 | Power supply supervision module | Supervision of power supply and battery backup |
| A6E600013 | NH8002 | 2 serial port add-on board | |
| A6E600014 | NH8010 | NK822x/MT8001 PC 104 LON board | |
| A6E600185 | NZ8201 | NK822x Mounting kit for CS11 | |
| A6E600186 | NZ8202 | NK822x Mounting kit for CS6 | |
| A6E600187 | NZ8203 | NK822x Mounting kit for SI410 | Cable for connecting SI410 to NK822x must be ordered separately from the intrusion product range (8006410001 SAQ18 Cable link X25 SAQ18). |
| A6E600188 | NZ8204 | NK822x power supply cable set | |
| A6E600189 | NZ8205 | NK822x serial link cable (DB9/m) | |
| | | NK80xx HW Accessories | |
| 5428430001 | NK8020 | LON repeater | |
| | | DF8000 – I/O Products | |
| A6E600195 | DF8020 | 8-output module | |
| A6E600194 | DF8040 | 8-input module | |

Note: WW8000 Composer and all necessary NK8000 configuration tools are included in the DMS8000 MP3.20 product CD.

Sales and Technical documentation

| Type | Doc. no | Designation |
|--|----------------|---|
| Product Datasheet (Sales) | | |
| - NK8223 | 007777 | Ethernet Port |
| - NK8225 | 009249 | Ethernet port with BACnet gateway |
| - NK8225 PICS | 009417 | Protocol Implementation Conformance Statement |
| - MM8000 | 006882 | Management Station |
| - MK8000 | 004968 | OPC Server |
| - MT8001 | 006952 | Management Terminal |
| - WW8000 | 003331 | Composer |
| - CF9000 I/O System | 001761, 001762 | Input/Output Multiplexing System (for I/O modules DF8020, DF8040, DF8045, DF8046) |
| Application & Planning (Sales) | 008084 | DMS8000 Application & Planning Guide |
| Installation, Configuration & Commissioning (Technical) | 007798 | NK8000 Installation, Configuration & Commissioning Guide |
| Maintenance & Troubleshooting (Technical) | 007798 | NK8000 Installation, Configuration & Commissioning Guide – Maintenance section |
| Connectivity Configuration (Technical) | 007083 | DMS8000 Network, Fire & Intrusion Configuration Guide |
| | 009424 | DMS8000 Access Control Configuration Guide |
| | 009425 | DMS8000 Video Configuration Guide |

Siemens Switzerland Ltd
Building Technologies Group
International Headquarters
Fire Safety & Security Products
Gubelstrasse 22
CH-6301 Zug
Tel +41 41 724 24 24
Fax +41 41 724 35 22
www.sbt.siemens.com

© 2006 Copyright by
Siemens Switzerland Ltd
Data and design subject to change without notice.
Supply subject to availability.