

SIEMENS

Motor Circuit Protector, Frame JG, LG
 Protector Del Circuito Del Motor, Caja Base JG, LG
 Protecteur De Circuit De Moteur, de Base JG, LG

| | U.S. Cat. No. | Euro Order No. |
|-------|---------------|--------------------|
| Item: | HJM3M400 | 3VL4140-2KK30-0AA0 |
| | HJM3L400 | 3VL4140-2KJ30-0AA0 |
| | HLM3L600 | 3VL4860-2KJ30-0AA0 |
| | HLM3M600 | 3VL4860-2KK30-0AA0 |



Installation Instructions / Instructivo de Instalación

|  |  Danger |  Peligro |  Danger |
|---|--|--|--|
|  | Hazardous Voltage. Will cause death or serious injury. Turn off and lock out all power supplying this device before working on this device. Replace all covers before power supplying this device is turned on. | Tensión peligrosa. Puede causar la muerte o lesiones graves. Desenergice totalmente antes de instalar o darle servicio. Reemplace todas las barreras y cubiertas antes de energizar el interruptor. | Tension dangereuse. Danger de mort ou risque de blessures graves. Couper l'alimentation de l'appareil et barrer avant de travailler. Remplacez tous les couverts avant que l'alimentation de pouvoir soit alimenté. |



Use only with Siemens certified Components.
 Utilizar únicamente con componentes certificados de Siemens.
 A utiliser uniquement avec les composants certifiés Siemens.

NOTE - These instructions do not purport to cover all details or variations in equipment, or to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise, which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the local Siemens sales office. The contents of this instruction manual shall not become part of or modify any prior or existing agreement, commitment or relationship. The sales contract contains the entire obligation of Siemens. The warranty contained in the contract between the parties is the sole warranty of Siemens. Any statements contained herein do not create new warranties or modify the existing warranty.


Trademarks - Unless otherwise noted, all names identified by ® are registered trademarks of Siemens AG or Siemens Industry, Inc. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.

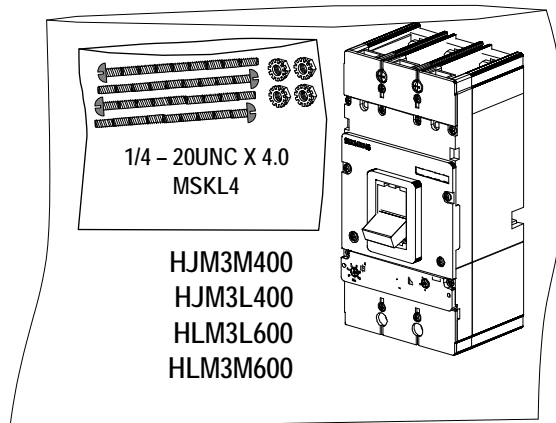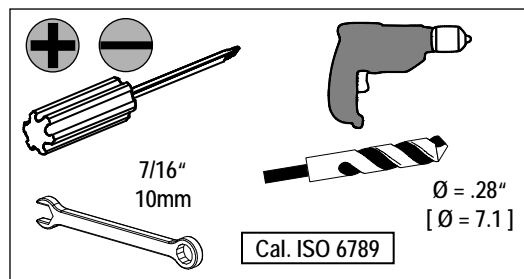


1

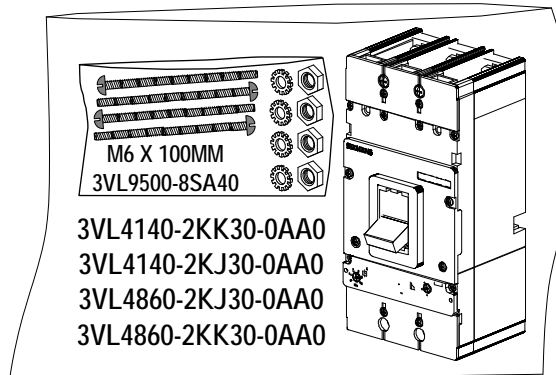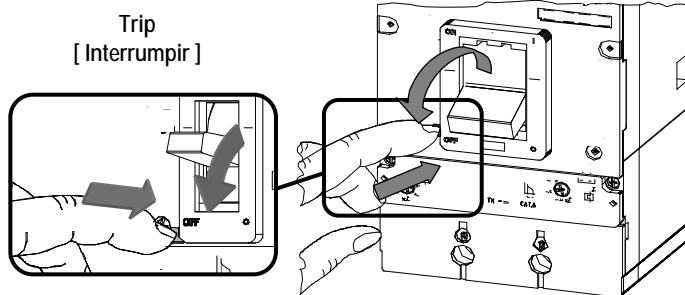


2

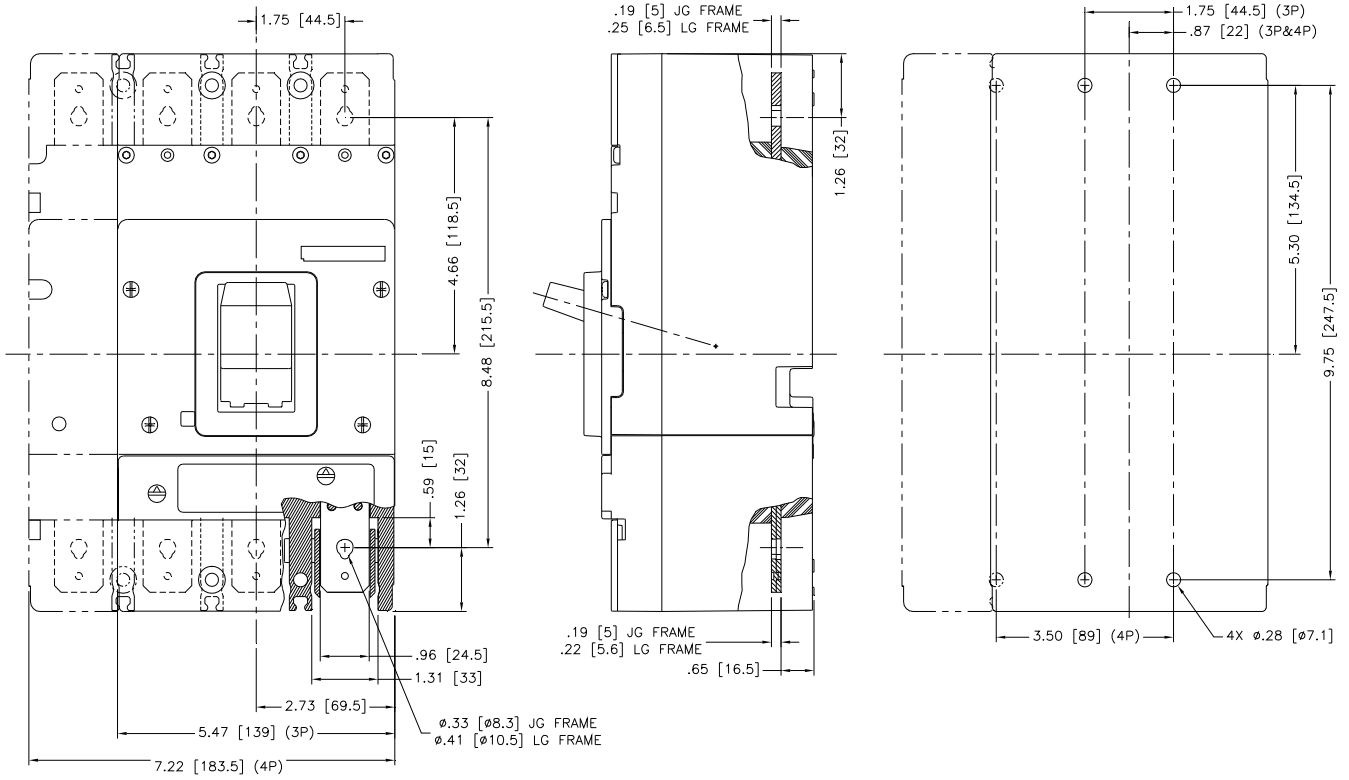

3

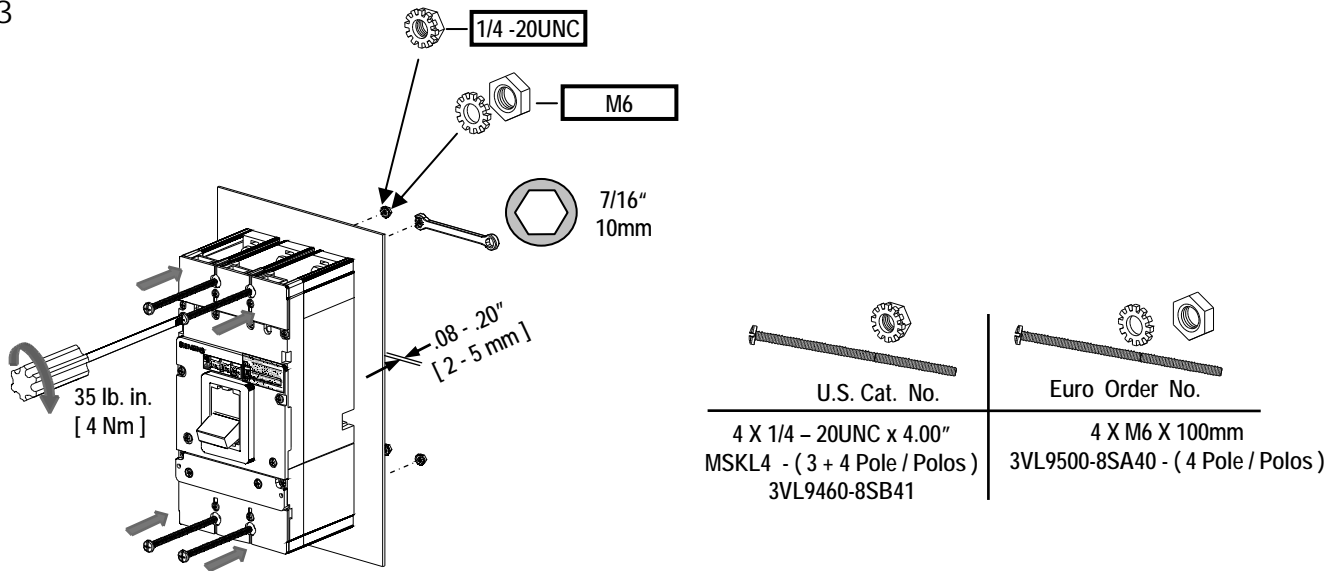

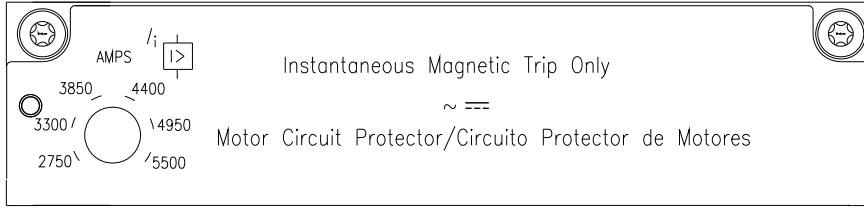

JG / LG

EX: HLM3M600
[3VL4860-2KK30-0AA0]

| VL Motor Circuit Protector (MCP) | | |
|------------------------------------|---------------------------|--|
| Motor Full Load Amps | Trip Switch Setting (A) | Catalog Number |
| 96 - 139 | 1250 | HJM3L400 [3VL4140-2KJ30-0AA0] 400 Amp |
| 115 - 167 | 1500 | |
| 135 - 194 | 1750 | |
| 154 - 222 | 2000 | |
| 173 - 250 | 2250 | |
| 192 - 278 | 2500 | |
| 154 - 222 | 2000 | HJM3M400 [3VL4140-2KK30-0AA0] 400 Amp |
| 185 - 267 | 2400 | |
| 215 - 311 | 2800 | |
| 246 - 356 | 3200 | |
| 277 - 400 | 3600 | |
| (308 - 400) See Footnote ① | 4000 | |
| 154 - 222 | 2000 | HLM3L600 [3VL4860-2KJ30-0AA0] 600 Amp |
| 185 - 267 | 2400 | |
| 215 - 311 | 2800 | |
| 246 - 356 | 3200 | |
| 277 - 400 | 3600 | |
| 308 - 444 | 4000 | |
| 212 - 306 | 2750 | HLM3M600 [3VL4860-2KK30-0AA0] 600 Amp |
| 254 - 367 | 3300 | |
| 296 - 428 | 3850 | |
| 338 - 489 | 4400 | |
| 381 - 550 | 4950 | |
| 423 - 600 | 5500 | |

① -These settings are provided for starting currents greater than 11X but not to exceed 17X. Full Load Amps (FLA) not to exceed ampere rating of MCP.

Bestell-Nr. / Order No.: 3ZX1012-0VL68-3BA1 For Support in Europe refer to : Internet: www.siemens.de/lowvoltage/technical-assistance GWA 4NEB 179 6954-10 DS 04

Technical Support: Toll Free: 1-800-241-4453 Internet: www.usa.siemens.com/powerdistribution