



Traditional Daily Timeswitch

RWB30E

Features

- LED "ON" Lamps
- Advance and + 1 hour boost facility
- 2 ON/OFFS per day
- Ideal for combi boilers
- All day option
- Override facility
- Industry standard backplate

Use

The Siemens RWB30E is a combined mechanical and microprocessor based product designed to provide better control of a combination boiler or single zone application.

The RWB30E offers a choice of two ON/OFF periods per day and the ability to programme past midnight i.e., the last OFF can be almost 24 hours after the first ON.

Disposal




The device is considered an electronic device for disposal in terms of the European Directive 2012/19/EU and may not be disposed of as domestic garbage.

- Dispose of the device through channels provided for this purpose.
- Comply with all local and currently applicable laws and regulations.

Application Examples



Combi Boiler



Key

- 1 Combi Boiler
- 2 Timeswitch RWB
- 3 Room thermostat RAA
- 4 Heating circuit

Wiring Diagrams

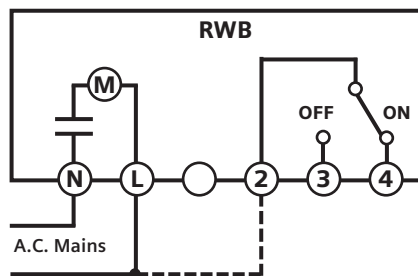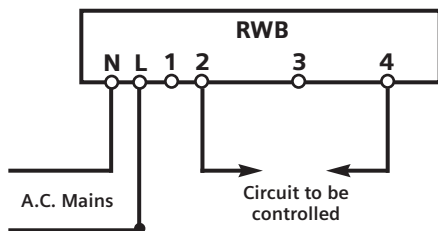

Technical Data

Operating Voltage	AC 220-240 V
Switching Voltage	12-250 V
Frequency	50 Hz
Contact Rating	
- resistive	6 Amp
- inductive	2 Amp
Ambient temperature range	0°C to 40°C
Environmental humidity	80% RH
Housing ABS resistant to fire	as IEC 730 standard
Dimensions	145mm wide x 90mm high x 50mm deep

Siemens Building Technologies
 Hawthorne Road
 Staines
 Middlesex
 TW18 3AY

Technical helpline 0870 850 0184

