



E-14-I-075-DP

**Conformance test report of the IEC60870-5-104
protocol implementation in the Siemens SICAM
AK system**

**Tested as controlled station implementation in
Standard and Reversed direction**

Madrid, June 11, 2014

Author D. Palomo
DNV KEMA Energy & Sustainability.

By order of Siemens, Vienna, Austria.

author: D. Palomo	2014-06-11	reviewed: E.Henriquez	13-06-2014
B	48 pages 2 appendices PE/MS	approved: S. Blanco	23-06-2014



© KEMA Energy S.L., Madrid, Spain. All rights reserved.

This document contains confidential information that shall not be transmitted to any third party without written consent of KEMA Energy S.L. The same applies to file copying (including but not limited to electronic copies), wholly or partially.

It is prohibited to change any and all versions of this document in any manner whatsoever, including but not limited to dividing it into parts. In case of a conflict between an electronic version (e.g. PDF file) and the original paper version provided by DNV KEMA, the latter will prevail.

KEMA Energy S.L. and/or its associated companies disclaim liability for any direct, indirect, consequential or incidental damages that may result from the use of the information or data, or from the inability to use the information or data contained in this document.

CONTENTS		page
1	Introduction	4
1.1	Background	4
1.2	Testing viewpoints	4
1.3	Purpose of this document	5
1.4	Glossary	5
2	References	6
2.1	Normative	6
2.2	Other	6
3	The Type test	7
3.1	Components in the test environment	7
3.2	SUT requirements	8
3.3	Overview of the test suite	9
4	Test results	11
5	Conclusion and recommendations	13
5.1	Remarks following from the test	13
6	Protocol Implementation Conformance Statement (PICS)	14
6.1	System or device	14
6.2	Network configuration	14
6.3	Physical layer	15
6.4	Link layer	16
6.5	Application layer	17
6.6	Basic application functions	24
Appendix A – TEST RESULTS CHART		30
Appendix B-1 – TEST RESULTS OF SINGLE COMMAND TRANSMISSION		37
Appendix B-2 – TEST RESULTS OF DOUBLE COMMAND TRANSMISSION		40
Appendix B-3 – TEST RESULTS OF REGULATING STEP COMMAND TRANSMISSION		43
Appendix B-4 – TEST RESULTS OF SETPOINT COMMAND TRANSMISSION		46

1 INTRODUCTION

1.1 Background

Siemens AG (Austria) has implemented the IEC 60870-5 Telecontrol Companion Standard 104 in the SICAM AK product for communication with a controlling system. The IEC 60870-5 Telecontrol Companion Standard 104 (TCS104) can be used as a communication protocol for exchanging information between Control Center(s) (controlling station) and their substations (controlled stations). The information exchanged can be for example measurands, status messages and commands.

DNV KEMA's assignment was to answer the following question:

“Does the Siemens IEC 60870-5-104 controlled station protocol implementation (version ETA4) for the SICAM AK System conform to the IEC 60870-5-104 Companion Standard in Standard and Reversed Direction and the Siemens IEC60870-5-104 interoperability profile included in the Siemens PICS document DC0-131-2.02, Edition 05.2014 / chapter 3?”

To answer this question, DNV KEMA has performed a type conformance test of the Siemens IEC 60870-5-104 controlled station protocol implementation in the SICAM AK system.

1.2 Testing viewpoints

There are two viewpoints for testing: **Type testing** and **Interoperability testing**.

The first testing viewpoint, **Type testing**, is the process of verifying that an implementation performs in accordance with a particular standard. A manufacturer may claim: *“my equipment conforms to standard ISO/IEC xxx-x”*. Type testing enables such a claim to be investigated and assessed by an objective and independent institute, like DNV KEMA, to establish its validity. The type test may result in certification by means of an Attestation of Conformity, guaranteed by DNV KEMA, for the tested implementation version in that equipment. DNV KEMA maintains a list of type-tested and approved equipment with IEC 60870-5 implementations (see www.dnvkema.com/pctc).

Type testing extends the normal conformance test process by adding negative and boundary test items to the testing process.

The second viewpoint, **Interoperability testing (IOP)**, shows whether or not a protocol implementation, installed in one product, can be used to exchange information with another

product which has implemented the same protocol. No direct attention is paid to the implementation of the protocol itself. After completion of the tests, there is no guarantee that the protocol implementation is in accordance with that particular standard. It is clear, however, whether or not the protocol functions required in order to exchange information can work together to accomplish the required task.

1.3 Purpose of this document

The purpose of this document is to describe the results of the type test of the IEC 60870-5-104 implementation in the System Under Test [further SUT]. The type test was executed at Siemens in Vienna, Austria, from January 23rd May till 28rd May 2014. The results will form the basis for an Attestation of Conformance. This Attestation is primarily of interest to product marketers and customers, as a proof of independent verification of minimized interoperability risks.

1.4 Glossary

- SUT = System Under Test;
- PICS = Protocol Implementation Conformance Statement.

2 REFERENCES

2.1 Normative

The tests defined in this document are based on the following IEC (International Electrotechnical Committee) documents in the IEC 60870-5 range: Telecontrol equipment and systems part 5: Transmission protocols:

1. IEC 60870-5-1: TELECONTROL EQUIPMENT AND SYSTEMS, PART 5, Transmission protocols: Transmission Frame Formats, IS (International Standard), 1990, further referred to as [IEC5-1]
2. IEC 60870-5-2: TELECONTROL EQUIPMENT AND SYSTEMS, PART 5, Transmission protocols: Link Transmission Procedures, IS, 1992, further referred to as [IEC5-2]
3. IEC 60870-5-3: TELECONTROL EQUIPMENT AND SYSTEMS, PART 5, Transmission protocols: General Structure of Application Data, IS, 1992, further referred to as [IEC5-3]
4. IEC 60870-5-4: TELECONTROL EQUIPMENT AND SYSTEMS, PART 5, Transmission protocols: Definition and Coding of Application Information Elements, IS, 1993, further referred to as [IEC5-4]
5. IEC 60870-5-5: TELECONTROL EQUIPMENT AND SYSTEMS, PART 5, Transmission protocols: Basic Application Functions, IS, 1995, further referred to as [IEC5-5]
6. IEC 60870-5-101: TELECONTROL EQUIPMENT AND SYSTEMS, PART 5, Transmission protocols: Companion standard for basic telecontrol tasks, IS, second edition 2003-02, further referred to as [IEC5-101].
7. IEC 60870-5-104: TELECONTROL EQUIPMENT AND SYSTEMS, PART 5, Transmission protocols: Network access for IEC 60870-5-101 using standard transport profiles, IS, second edition 2006-06, further referred to as [IEC5-104].
8. IEC 60870-5-604: Telecontrol equipment and systems, Part 5-604, Conformance test cases for the IEC 60870-5-104 Companion Standard.

2.2 Other

1. **Siemens IEC60870-5-104 interoperability profile included in the Siemens PICS document DC0-131-2.02, Edition 05.2014 / chapter 3.**

3 THE TYPE TEST

3.1 Components in the test environment

The test environment consists of the following components:

- The System Under Test [SUT]: the Siemens SICAM AK controlled station implementation using ETA4 firmware version 2.01 for IEC60870-5-104 protocol implementation;
- The DNV KEMA UnIECim-104 version 2.0.2 protocol test platform, which runs the TCS104 simulator test suite version 1.42 and acts as a single-node Controlled station;
- The DNV KEMA UnIECom-104 version 1.2.1 protocol test analyzer;
- RJ45 100 Mb cables.

The configured IP-addresses during the test (172.20.241.*):

- System under test: .73
- Test system: .127

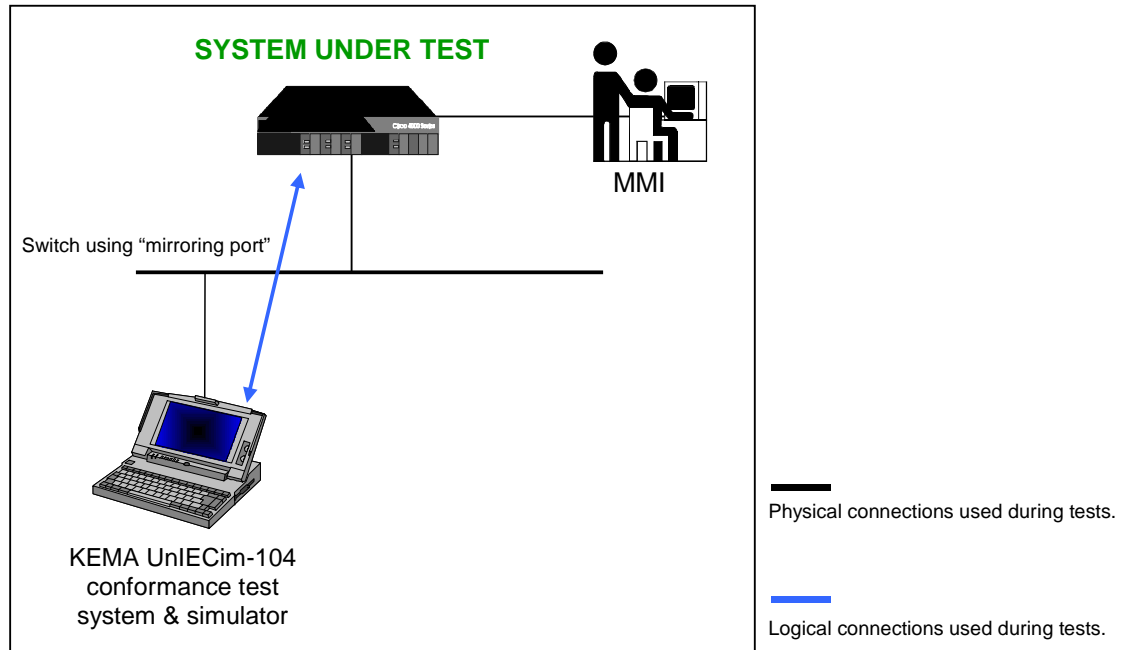


Figure 3.1 Connection and set-up of the test environment

3.2 SUT requirements

Next to the CS104 communication capability specified in the PID, the System Under Test must support the following requirements for control and simulation purposes during testing, e.g. via additional test equipment attached to the SUT or one or more configured and running operator MMI stations:

- Display the current values of the Information Elements described in I/O list, mapped to visible MMI-elements
- Manually pause/freeze (or equivalent, e.g. extending timers) of the communication to verify displayed or analysed data
- Manually shut down and restart or equivalent
- Manually cut-off of the connection to the communication link
- Manually activate the supported Basic Application Functions
- Direct physical connection to the communication link.

3.2.1 SUT configuration

The configuration of the SUT is as follows:

- The telecontrol communication mode is balanced (by definition) peer-to-peer, capable of using a Wide Area TCP/IP network (see also figure 3.1)
- IP address detail as in figure 3.1, besides other configuration details
- Common Address of ASDU (CAA) used during the test was 13067 (11.59 structured)
- Further details of the implemented protocol (interoperability sheet) subset can be found at paragraph 5 Protocol Implementation Conformance Statement (PICS)
- The Protocol Implementation Conformance Statement forms the basis for the applicable test cases in the test plan in Appendix A.

3.2.2 UnIECim test system requirements

The UnIECim IEC 60870-5 protocol test platform is DNV KEMA's test system for testing IEC 60870-5 protocol implementations. The knowledge of the IEC 60870-5 protocol is in the software.

UnIECim 60870-5 supports real-time data capturing, analysis and decoding, combined with construction of frames and real-time script execution for simulation of conforming (positive) as well as non-conforming (negative) communication functions. UnIECim automatically executes all scripts (test cases) in a so-called test suite.

UnIECim 60870-5-**104** is the test tool for testing controlling or controlled station implementations based on the IEC 60870-5 Telecontrol Companion Standard 104 (TCS 104) Network access for IEC 60870-5-101 including redundancy functionality.

3.2.3 Communication link requirements

The data communication network must support the following requirements for testing:

- TCP/IP and Ethernet as defined in [5-104]
- the connection is made by using a RJ45 patch cable, Ethernet pin configuration
- “Normal” performance and with a minimum of other than TCS104 traffic on the network.

3.3 Overview of the test suite

3.3.1 Tests on Transport provider level

For information exchange between both end systems a TCP/IP network is used. Tests in table A.1 verify that end systems can establish a TCP/IP connection, are able to exchange (CS104) messages and the TCP/IP connection doesn't fail permanently. White-box (internal) TCP/IP and lower tests are *not* performed. The tests are passed if no error is reported during a test session.

If relevant, redundant link tests are defined in Appendix A, table A.11.

3.3.2 Tests on application level

Most of the Application Service Data Units (ASDUs) tests defined in Appendix A are automatically performed by the UnIECim test tool on each received ASDU if applicable. The tests are passed if no error is reported during a test session.

The Basic Application Functions (BAFs) tests defined in Appendix A are performed by a combination of automatic verification and manual expert analysis for each test case if applicable. The tests have passed if no defect is found during a test session.

3.3.3 Negative tests

The Negative tests defined in Appendix A table 24 are performed by a combination of automatic verification and manual expert analysis for each test case if applicable. The tests have passed if



the SUT continues correct operation, that is: does not send corrupted frames and reacts in a correct and sensible manner.

The SUT may not fail permanently when receiving:

- Corrupted frames
- Illegal functions
- Not supported functions
- Not supported Basic Application Functions (BAF) or ASDU's.

4 TEST RESULTS

Table 4.1 in this Chapter gives a summary of the type test results. Numbers shown in the table refer to test numbers of individual test cases in IEC 60870-5-604. If applicable, an end note describing a defect is added in appendix A.

Major defects are a **certain** cause for operational risks: these **MUST** be corrected before going into an operational situation! They imply the test is **failed**.

A **minor** defect is non-conformant behaviour, and can have a negative influence on the use of the product *in specific configurations*. Minor defects are a potential cause for operational problems. Therefore in a type test they also imply the test is **failed**.

In an interoperability test a minor defect **could pass** the test, depending on the severity of the defect. In configurations with different products and/or different manufacturers these minor defects in the implementation are a potential risk for the interoperability when not taken into account before going into an operational situation.

Finally, **remarks** introduce additional observations about the test case results, like limitations in the implementation.

The Protocol Implementation Conformance Statement (PICS) in chapter 6 is the basis for the applicable test cases in Appendix A. The PICS gives an overview of the tested protocol implementation, but this isn't a guarantee that the complete function or ASDU, as enabled in the PICS, is tested and supported. Partial testing is possible and the completeness of the tests for the specific function or ASDU must be consulted in Appendix A.

Table 4.1 Summary of test results for the System Under Test

Test group	Major	Minor	Remarks	Verdict
0. Configuration parameters			5.2.0.90	Passed
1. Transport provider level			5.3.1.50 (2), 5.3.1.90	Passed
2. Data Unit Identifier				Passed
3. ASDUs for Process information in monitor (normal) direction				Passed
4. ASDUs for Process information in control (normal) direction				Passed
5. ASDUs for system information in monitor direction				Passed
6. ASDU for system information in control (normal) direction				Passed
7. ASDU for parameters in control (normal) direction				Passed
8. ASDU for file transfer in monitor and control direction				Passed
9. Data Unit Identifier				Passed
10. Information object address				Passed
11. Station initialisation				Passed
12. Redundant connection tests			5.4.12.10	Passed
13. Cyclic data transmission				Passed
14. Data acquisition through Read				N/A
15. Acquisition of events				Passed
16. General interrogation				Passed
17. Clock synchronisation			5.4.17.1	N/A
18. Command transmission			5.4.18.40, 5.4.18.70, 5.4.18.80	Passed
19. Transmission of integrated totals			5.4.19.1	Passed
20. Parameter loading			5.4.21.1	Passed
21. Test procedure				Passed
22. File Transfer			5.4.22.10	Passed
23. Additional tests				Passed
24. Negative tests			5.4.24.1	Passed
25. PIXIT related				N/A
TOTALS			13	PASSED

* N/A = Not Applicable

5 CONCLUSION AND RECOMMENDATIONS

The assignment was to give a well-founded answer to the question:

“Does the Siemens IEC 60870-5-104 controlled station protocol implementation (Version ETA4) for the SICAM AK System conform to the IEC 60870-5-104 Companion Standard in Standard and Reversed Direction and the Siemens IEC60870-5-104 interoperability profile included in the Siemens PICS document DC0-131-2.02, Edition 05.2014 / chapter 3?”

Based on the test results described in this report, DNV KEMA declares the tested Siemens CS104 controlled station implementation for the SICAM AK system **in conformance** with the IEC 60870-5-104 standard [IEC 5-104] and the Protocol Implementation Conformance Statement (PICS) - Interoperability of SICAM AK according to IEC 60870-5-104 (ETA4) as Controlled Station version DC0-131-2.02 / Chapter 3.

5.1 Remarks following from the test

- When testing parameter K by sending several GIs fast, it was observed that DUT stops sending I-frames when ACT_TERM from a GI is issued, even when K-unacknowledged I-Frames is not reached, therefore pending I-frames from next GI are not sent until DUT receives from the master an S-frames with the acknowledge of the ACT_TERM.

6 PROTOCOL IMPLEMENTATION CONFORMANCE STATEMENT (PICS)

The Protocol Implementation Conformance Statement (PICS) in this paragraph is the basis for the applicable test cases in Appendix A. This PICS gives an overview of the tested protocol implementation, but this isn't a guarantee that the complete function or ASDU, as enabled in the PICS, is tested and supported. Partial testing is possible and the completeness of the tests for the specific function or ASDU must be consulted in Appendix A.

Note:

In addition, the full specification of a system may require individual selection of certain parameters for certain parts of the system, such as the individual selection of scaling factors for individually addressable measured values.

The selected parameters should be marked in the white boxes as follows:

- Function or ASDU is not used
- Function or ASDU is used as standardized (default)
- R Function or ASDU is used in reverse mode
- B Function or ASDU is used in standard and reverse mode

The possible selection (blank, X, R, or B) is specified for each specific clause or parameter. A black check box indicates that the option cannot be selected in this companion standard.

6.1 System or device

(system-specific parameter, indicate definition of a system or a device by marking one of the following with 'X')

- System definition
- Controlling station definition
- Controlled station definition

6.2 Network configuration

(network-specific parameter, all configurations that are used are to be marked 'X')

- | | |
|---|--|
| <input checked="" type="checkbox"/> Point-to-point | <input checked="" type="checkbox"/> Multipoint-partyline |
| <input checked="" type="checkbox"/> Multiple-point-to-point | <input checked="" type="checkbox"/> Multipoint-star |

6.3 Physical layer

(network-specific parameter, all interfaces and data rates that are used are to be marked 'X')

Transmission speed (control direction)

Unbalanced interchange Circuit V.24/V.28 Standard	Unbalanced interchange Circuit V.24/V.28 Recommended if >1 200bit/s	Balanced interchange Circuit X.24/X.27	
<input type="checkbox"/> 100 bit/s	<input type="checkbox"/> 2 400 bit/s	<input type="checkbox"/> 2 400 bit/s	<input type="checkbox"/> 56 000 bit/s
<input type="checkbox"/> 200 bit/s	<input type="checkbox"/> 4 800 bit/s	<input type="checkbox"/> 4 800 bit/s	<input type="checkbox"/> 56 000 bit/s
<input type="checkbox"/> 300 bit/s	<input type="checkbox"/> 9 600 bit/s	<input type="checkbox"/> 9 600 bit/s	<input type="checkbox"/> 64 000 bit/s
<input type="checkbox"/> 600 bit/s		<input type="checkbox"/> 19 200 bit/s	
<input type="checkbox"/> 1 200 bit/s		<input type="checkbox"/> 38 400 bit/s	

Transmission speed (monitor direction)

Unbalanced interchange Circuit V.24/V.28 Standard	Unbalanced interchange Circuit V.24/V.28 Recommended if >1 200bit/s	Balanced interchange Circuit X.24/X.27	
<input type="checkbox"/> 100 bit/s	<input type="checkbox"/> 2 400 bit/s	<input type="checkbox"/> 2 400 bit/s	<input type="checkbox"/> 56 000 bit/s
<input type="checkbox"/> 200 bit/s	<input type="checkbox"/> 4 800 bit/s	<input type="checkbox"/> 4 800 bit/s	<input type="checkbox"/> 56 000 bit/s
<input type="checkbox"/> 300 bit/s	<input type="checkbox"/> 9 600 bit/s	<input type="checkbox"/> 9 600 bit/s	<input type="checkbox"/> 64 000 bit/s
<input type="checkbox"/> 600 bit/s		<input type="checkbox"/> 19 200 bit/s	
<input type="checkbox"/> 1 200 bit/s		<input type="checkbox"/> 38 400 bit/s	

6.4 Link layer

(network-specific parameter, all options that are used are to be marked 'X'. Specify the maximum frame length. If a non-standard assignment of class 2 messages is implemented for unbalanced transmission, indicate the Type ID and COT of all messages assigned to class 2.)

~~Frame format FT 1.2, single character 1 and the fixed time-out interval are used exclusively in this companion standard.~~

Link transmission

- Balanced transmission
- Unbalanced transmission

Frame length

- Maximum length L
(number of octets)

Address field of the link

- not present (balanced transmission only)
- One octet
- Two octets
- Structured
- Unstructured

When using an unbalanced link layer, the following ASDU types are returned in class 2 messages (low priority) with the indicated causes of transmission:

- The standard assignment of ASDUs to class 2 messages is used as follows:

Type identification	Cause of transmission
9, 11, 13, 21	<1>

- A special assignment of ASDUs to class 2 messages is used as follows:

Type identification	Cause of transmission

Note: (In response to a class 2 poll, a controlled station may respond with class 1 data when there is no class 2 data available).

6.5 Application layer

Transmission mode for application data

Mode 1 (Least significant octet first), as defined in clause 4.10 of IEC 60870-5-4, is used exclusively in this companion standard.

Common address of ASDU

(system-specific parameter, all configurations that are used are to be marked 'X')

- | | | | |
|--------------------------|-----------|-------------------------------------|------------|
| <input type="checkbox"/> | One octet | <input checked="" type="checkbox"/> | Two octets |
|--------------------------|-----------|-------------------------------------|------------|

Information object address

(system-specific parameter, all configurations that are used are to be marked 'X')

- | | | | |
|-------------------------------------|--------------|-------------------------------------|--------------|
| <input type="checkbox"/> | One octet | <input checked="" type="checkbox"/> | Structured |
| <input type="checkbox"/> | Two octets | <input checked="" type="checkbox"/> | Unstructured |
| <input checked="" type="checkbox"/> | Three octets | | |

Cause of transmission

(system-specific parameter, all configurations that are used are to be marked 'X')

- | | | | |
|--------------------------|-----------|-------------------------------------|--|
| <input type="checkbox"/> | One octet | <input checked="" type="checkbox"/> | Two octets (with originator address) Originator address is set to zero if not used |
|--------------------------|-----------|-------------------------------------|--|

Length of APDU

(system-specific parameter, specify the maximum length of the APDU per system)

The maximum length of the APDU for both directions is 253. It is a fixed system parameter.

- | | |
|--------------------------|--|
| <input type="checkbox"/> | Maximum length of APDU per system in control direction |
| <input type="checkbox"/> | Maximum length of APDU per system in monitor direction |

Selection of standard ASDUs

Process information in monitor direction

(station-specific parameter, mark each Type ID 'X' if it is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

B <1> := Single-point information	M_SP_NA_1
■ <2> := Single-point information with time tag	M_SP_TA_1
B <3> := Double-point information	M_DP_NA_1
■ <4> := Double-point information with time tag	M_DP_TA_1
B <5> := Step position information	M_ST_NA_1
■ <6> := Step position information with time tag	M_ST_TA_1
B <7> := Bitstring of 32 bit	M_BO_NA_1
■ <8> := Bitstring of 32 bit with time tag	M_BO_TA_1
B <9> := Measured value, normalized value	M_ME_NA_1
■ <10> := Measured value, normalized value with time tag	M_ME_TA_1
B <11> := Measured value, scaled value	M_ME_NB_1
■ <12> := Measured value, scaled value with time tag	M_ME_TB_1
B <13> := Measured value, short floating point value	M_ME_NC_1
■ <14> := Measured value, short floating point value with time tag	M_ME_TC_1
B <15> := Integrated totals	M_IT_NA_1
■ <16> := Integrated totals with time tag	M_IT_TA_1
■ <17> := Event of protection equipment with time tag	M_EP_TA_1
■ <18> := Packed start events of protection equipment with time tag	M_EP_TB_1
■ <19> := Packed output circuit information of protection equipment with time tag	M_EP_TC_1
□ <20> := Packed single-point information with status change detection	M_PS_NA_1
□ <21> := Measured value, normalized value without quality descriptor	M_ME_ND_1
B <30> := Single-point information with time tag CP56Time2a	M_SP_TB_1
B <31> := Double-point information with time tag CP56Time2a	M_DP_TB_1
B <32> := Step position information with time tag CP56Time2a	M_ST_TB_1
B <33> := Bitstring of 32 bit with time tag CP56Time2a	M_BO_TB_1
B <34> := Measured value, normalized value with time tag CP56Time2a	M_ME_TD_1
B <35> := Measured value, scaled value with time tag CP56Time2a	M_ME_TE_1
B <36> := Measured value, short floating point value with time tag CP56Time2a	M_ME_TF_1
B <37> := Integrated totals with time tag CP56Time2a	M_IT_TB_1
B <38> := Event of protection equipment with time tag CP56Time2a	M_EP_TD_1
B <39> := Packed start events of protection equipment with time tag CP56Time2a	M_EP_TE_1
B <40> := Packed output circuit information of protection equipment with time tag CP56Time2a	M_EP_TF_1

Either the ASDUs of the set <2>, <4>, <6>, <8>, <10>, <12>, <14>, <16>, <17>, <18>, <19> or of the set <30> – <40> are used.

Process information in control direction

(station-specific parameter, mark each Type ID 'X' if it is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

<input checked="" type="checkbox"/> <45> :=	Single command	C_SC_NA_1
<input checked="" type="checkbox"/> <46> :=	Double command	C_DC_NA_1
<input checked="" type="checkbox"/> <47> :=	Regulating step command	C_RC_NA_1 **)
<input checked="" type="checkbox"/> <48> :=	Set point command, normalized value	C_SE_NA_1
<input checked="" type="checkbox"/> <49> :=	Set point command, scaled value	C_SE_NB_1
<input checked="" type="checkbox"/> <50> :=	Set point command, short floating point value	C_SE_NC_1
<input type="checkbox"/> <51> :=	Bitstring of 32 bit	C_BO_NA_1
<input checked="" type="checkbox"/> <58> :=	Single command with time tag CP56Time 2a	C_SC_TA_1
<input checked="" type="checkbox"/> <59> :=	Double command with time tag CP56Time 2a	C_DC_TA_1
<input checked="" type="checkbox"/> <60> :=	Regulating step command with time tag CP56Time 2a	C_RC_TA_1 **)
<input checked="" type="checkbox"/> <61> :=	Set point command, normalized value with time tag CP56Time 2a	C_SE_TA_1
<input checked="" type="checkbox"/> <62> :=	Set point command, scaled value with time tag CP56Time 2a	C_SE_TB_1
<input checked="" type="checkbox"/> <63> :=	Set point command, short floating point value with time tag CP56Time 2a	C_SE_TC_1
<input type="checkbox"/> <64> :=	Bitstring of 32 bit with time tag CP56Time 2a	C_BO_TA_1

Either the ASDUs of the set <45> – <51> or of the set <58> – <64> are used.

***) For <TI:=47> regulating step command and <TI:=60> regulating step command with time tag CP56Time2a, persistent output is not supported.

System information in monitor direction

(station-specific parameter, mark 'X' if used)

<input checked="" type="checkbox"/> <70> :=	End of initialization	M_EI_NA_1
---	-----------------------	-----------

System information in control direction

(station-specific parameter, mark each Type ID 'X' if it is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

<input checked="" type="checkbox"/> <100>:=	Interrogation command	C_IC_NA_1
<input checked="" type="checkbox"/> <101>:=	Counter interrogation command	C_CI_NA_1
<input type="checkbox"/> <102>:=	Read command	C_RD_NA_1
<input type="checkbox"/> <103>:=	Clock synchronization command	C_CS_NA_1
<input checked="" type="checkbox"/> <104>:=	Test command	C_TS_NA_1

<input checked="" type="checkbox"/>	<105>:= Reset process command	C_RP_NA_1
<input type="checkbox"/>	<106>:= Delay acquisition command	E_CD_NA_4
<input checked="" type="checkbox"/>	<107>:= Test command with time tag CP56time2a	C_TS_TA_1

Parameter in control direction

(station-specific parameter, mark each Type ID 'X' if it is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

<input checked="" type="checkbox"/>	<110>:= Parameter of measured value, normalized value	P_ME_NA_1
<input checked="" type="checkbox"/>	<111>:= Parameter of measured value, scaled value	P_ME_NB_1
<input checked="" type="checkbox"/>	<112>:= Parameter of measured value, short floating point value	P_ME_NC_1
<input type="checkbox"/>	<113>:= Parameter activation	P_AC_NA_1

File Transfer

(station-specific parameter, mark each Type ID 'X' if it is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

<input checked="" type="checkbox"/>	<120>:= File ready	F_FR_NA_1
<input checked="" type="checkbox"/>	<121>:= Section ready	F_SR_NA_1
<input checked="" type="checkbox"/>	<122>:= Call directory, select file, call file, call section	F_SC_NA_1
<input checked="" type="checkbox"/>	<123>:= Last section, last segment	F_LS_NA_1
<input checked="" type="checkbox"/>	<124>:= Ack file, ack section	F_AF_NA_1
<input checked="" type="checkbox"/>	<125>:= Segment	F_SG_NA_1
<input checked="" type="checkbox"/>	<126>:= Directory {blank or X, only available in monitor (standard) direction}	F_DR_TA_1

Type Identifier and Cause of Transmission Assignments

(station-specific parameters)

Shaded boxes are not required.

Black boxes are not permitted in this companion standard

Blank = Function or ASDU is not used.

Mark Type Identification/Cause of transmission combinations:

'X' if only used in the standard direction

'R' if only used in the reverse direction

'B' if used in both directions

Type Identification		Cause of transmission																		
		1	2	3	4	5	6	7	8	9	10	11	12	13	20 to 36	37 to 41	44	45	46	47
<1>	M_SP_NA_1		X	B								B	B		B					
<2>	M_SP_TA_1																			
<3>	M_DP_NA_1		X	B								B	B		B					
<4>	M_DP_TA_1																			
<5>	M_ST_NA_1		X	B*								B*	B*		B*					
<6>	M_ST_TA_1																			
<7>	M_BO_NA_1		X	B*											B*					
<8>	M_BO_TA_1																			
<9>	M_ME_NA_1	B	X	B											B					
<10>	M_ME_TA_1																			
<11>	M_ME_NB_1	B	X	B											B					
<12>	M_ME_TB_1																			
<13>	M_ME_NC_1	B	X	B											B					
<14>	M_ME_TC_1																			
<15>	M_IT_NA_1			B												X				
<16>	M_IT_TA_1																			
<17>	M_EP_TA_1																			
<18>	M_EP_TB_1																			
<19>	M_EP_TC_1																			
<20>	M_PS_NA_1																			
<21>	M_ME_ND_1																			
<30>	M_SP_TB_1			B								B	B							
<31>	M_DP_TB_1			B								B	B							
<32>	M_ST_TB_1			B*								B*	B*							
<33>	M_BO_TB_1			B*																
<34>	M_ME_TD_1			B																
<35>	M_ME_TE_1			B																
<36>	M_ME_TF_1			B																
<37>	M_IT_TB_1			B												X				
<38>	M_EP_TD_1			B																
<39>	M_EP_TE_1			B																
<40>	M_EP_TF_1			B																
<45>	C_SC_NA_1					B	B	B	B	B							B	B	B	B
<46>	C_DC_NA_1					B	B	B	B	B							B	B	B	B
<47>	C_RC_NA_1					B	B	B	B	B							B	B	B	B
<48>	C_SE_NA_1					B	B	B	B	B							B	B	B	B
<49>	C_SE_NB_1					B	B	B	B	B							B	B	B	B

B* ... can be generated by the PLC (PLC = "Programmable Logic Control"- Application software created by user using IEC 61131-3 based automation platform).

Type Identification		Cause of transmission																		
		1	2	3	4	5	6	7	8	9	10	11	12	13	20 to 36	37 to 41	44	45	46	47
<50>	C_SE_NC_1					B	B	B	B	B							B	B	B	B
<51>	C_BO_NA_1																			
<58>	C_SC_TA_1					B	B	B	B	B							B	B	B	B
<59>	C_DC_TA_1					B	B	B	B	B							B	B	B	B
<60>	C_RC_TA_1					B	B	B	B	B							B	B	B	B
<61>	C_SE_TA_1					B	B	B	B	B							B	B	B	B
<62>	C_SE_TB_1					B	B	B	B	B							B	B	B	B
<63>	C_SE_TC_1					B	B	B	B	B							B	B	B	B
<64>	C_BO_TA_1																			
<70>	M_EI_NA_1				B															
<100>	C_IC_NA_1					B	B			B							B	B	B	B
<101>	C_CI_NA_1					X	X			X							X	X	X	X
<102>	C_RD_NA_1																			
<103>	C_CS_NA_1																			
<104>	C_TS_NA_1																			
<105>	C_RP_NA_1*)						X	X									X	X	X	X
<106>	C_CD_NA_1																			
<107>	C_TS_TA_1					B	B										B	B	B	B
<110>	P_ME_NA_1					X	X								X		X			
<111>	P_ME_NB_1					X	X								X		X			
<112>	P_ME_NC_1					X	X								X		X			
<113>	P_AC_NA_1																			
<120>	F_FR_NA_1													X			X	1)	1)	1)
<121>	F_SR_NA_1													X			X	1)	1)	1)
<122>	F_SC_NA_1					X								X			X	1)	1)	1)
<123>	F_LS_NA_1													X			X	1)	1)	1)
<124>	F_AF_NA_1													X			X	1)	1)	1)
<125>	F_SG_NA_1													X			X	1)	1)	1)
<126>	F_DR_TA_1*)			X		X														

* ... blank or X only

X* ... can be generated by the PLC (PLC = "Programmable Logic Control"- Application software created by user using IEC 61131-3 based automation platform).

1) ... transparent transmission through SICAM AK.

Semantics of cause of transmission:

<0> := not used
<1> := periodic, cyclic (optional)
<2> := background scan (optional)
<3> := spontaneous
<4> := initialized
<5> := request or requested
<6> := activation
<7> := activation confirmation
<8> := deactivation
<9> := deactivation confirmation
<10> := activation termination
<11> := return information caused by a remote command
<12> := return information caused by a local command
<13> := file transfer
<14..19> := not used
<20> := interrogated by station interrogation
<21..36> := interrogated by interrogation of the group 1..16
<37> := requested by general counter request
<38..41> := requested by counter interrogation of the group 1..4
<42, 43> := not used
<44> := unknown type identification
<45> := unknown cause of transmission
<46> := unknown common address of ASDU
<47> := unknown information object address
<48, 63> := not used

6.6 Basic application functions

Station initialization

(station-specific parameter, mark 'X' if function is used)

Remote initialization

Cyclic data transmission

(station-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

Cyclic data transmission

Read procedure

(station-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

Read procedure

Spontaneous transmission

(station-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

Spontaneous transmission

Double transmission of information objects with cause of transmission spontaneous

(station-specific parameter, mark each information type 'X' where both a Type ID without time and corresponding Type ID with time are issued in response to a single spontaneous change of a monitored object)

The following type identifications may be transmitted in succession caused by a single status change of an information object. The particular information object addresses for which double transmission is enabled are defined in a project-specific list.

- Single-point information M_SP_NA_1, M_SP_TA_1, M_SP_TB_1 and M_PS_NA_1
- Double-point information M_DP_NA_1, M_DP_TA_1 and M_DP_TB_1
- Step position information M_ST_NA_1, M_ST_TA_1 and M_ST_TB_1
- Bitstring of 32 bit M_BO_NA_1, M_BO_TA_1 and M_BO_TB_1 (if defined for a specific project)
- Measured value, normalized value M_ME_NA_1, M_ME_TA_1, M_ME_ND_1 and M_ME_TD_1
- Measured value, scaled value M_ME_NB_1, M_ME_TB_1 and M_ME_TE_1
- Measured value, short floating point number M_ME_NC_1, M_ME_TC_1 and

Station interrogation

(station-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

- global
- group 1 group 7 group 13
- group 2 group 8 group 14
- group 3 group 9 group 15
- group 4 group 10 group 16
- group 5 group 11
- group 6 group 12

Information Object Addresses assigned to each group must be shown in a separate table

Clock synchronization

(station-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

- Clock synchronization
- Day of week used
- RES1, GEN (Time tag substituted/not substituted) used
- SU-bit (summertime) used

optional, see clause 7.6.

Command transmission

(object-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

- Direct command
- Direct set point command transmission
- Select and execute command
- Select and execute set point command
- C_SE ACTTERM used
- No additional definition
- Short pulse duration (duration determined by a system parameter in the outstation)
- Long pulse duration (duration determined by a system parameter in the outstation)

Persistent output **)

Supervision of maximum delay in command direction of commands and set point

0-65535s Maximum allowable delay of commands and set point

***) For <TI:=47> regulating step command and for <TI:=60> regulating step command with time tag CP56Time2a persistent output is not supported.

Transmission of integrated totals

(station- or object-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

Mode A: Local freeze with spontaneous

Mode B: Local freeze with counter

Mode C: Freeze and transmit by counter interrogation

Mode D: Freeze by counter interrogation command, frozen values reported

Counter read

Counter freeze without reset

Counter freeze with reset

Counter reset

General request

Request counter group 1

Request counter group 2

Request counter group 3

Request counter group 4

Parameter loading

(object-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

Threshold value

Smoothing factor

Low limit for transmission of measured

High limit for transmission of measured

Parameter activation

(object-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

- Act/deact of persistent cyclic or periodic transmission of the addressed

Test procedure

(station-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

- Test Procedure.

File transfer

(station-specific parameter, mark 'X' if function is used)

File transfer in monitor direction

- Transparent file
- Transmission of disturbance data of protection
- Transmission of sequences of events
- Transmission of sequences of recorded analogue values

File transfer in control direction

- Transparent file

X* ...Data can be transparent transported by the system but not generated or evaluated.
A maximum of 220 bytes user data can be transported.

Background scan

(station-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

- Background scan

Acquisition of transmission delay

(station-specific parameter, mark 'X' if function is only used in the standard direction, 'R' if only used in the reverse direction, and 'B' if used in both directions)

- Acquisition of transmission delay

Definition of time outs

Parameter	Default value	Remarks	Selected value
t_0	30s	Time out of connection establishment	Configurable
t_1	15s	Time out of send or test APDUs	Configurable
t_2	10s	Time out for acknowledges in case of no data messages $t_2 < t_1$	Configurable
t_3	20s	Time out for sending test frames in case of a long idle state	Configurable

Maximum range for timeouts t_0 to t_2 : 1s to 255s, accuracy 1s

Recommended range for timeout t_3 : 0s to 172800 (48h), accuracy 1s.

Maximum number of outstanding I format APDUs k and latest acknowledge

Parameter	Default value	Remarks	Selected value
k	12 APDUs	Maximum difference receive sequence number to send state variable	Configurable
w	8 APDUs	Latest acknowledge after receiving w I-format APDUs	Configurable

Maximum range of values k (ETA4): 1 to 128 APDUs, accuracy 1 APDU

Maximum range of values w (ETA4): 1 to 128 APDUs, accuracy 1 APDU

Recommendation: w should not exceed 2/3 of k.

Portnumber

Parameter	Value	Remarks
Portnumber	2404	In all cases

Redundant connections

4 Number N of redundancy group connections used



RFC 2200 suite

RFC 2200 is an official Internet Standard which describes the state of standardization of protocols used in the Internet as determined by the Internet Architecture Board (IAB). It offers a broad spectrum of actual standards used in the Internet. The suitable selection of documents from RFC 2200 defined in this standard for given projects has to be chosen by the user of this standard.

- Ethernet 802.3
- Serial X.21 interface
- Other selection from RFC 2200: GPRS

List of valid documents from RFC 2200

1.
2.
3.
4.
5.
6.
7. Etcetera.

APPENDIX A – TEST RESULTS CHART

	Record the Conformance Test Procedure result for each of the supported configuration parameter values on the right	Station Type		Direction	
		Controlling station	Controlled station	Normal Direction	Reversed Direction
	√.....indicates the Test Procedure PASSED for that configuration value. FAIL.....indicates Test Procedure failed for at least one of the Test Cases. N.A.....indicates that configuration value is not supported by the device. Empty.....indicates the Test Procedure was not performed. (There should be no empty boxes when testing is complete).				
Frame length	5.2.0.1 Maximum length L (control direction)	N.A.	√	√	√
	5.2.0.2 Maximum length L (monitor direction)	N.A.	√	√	√
Common Address of ASDU	5.2.0.70 Two (2) octets for Common Address of ASDU (CASDU)	N.A.	√	√	√
Information Object Address	5.2.0.80 Three (3) octets for Information Object Address (structured or unstructured)	N.A.	√	√	√
Cause of Transmission	5.2.0.90 Two (2) octets for COT field (2nd octet is Originator address)	N.A.	√ ¹	√	√
Tests on Transport Provider Level	5.3.1.1 IP Frame	N.A.	√	√	√
	5.3.1.3 TCP Frame	N.A.	√	√	√
	5.3.1.10 CS104 Frame Layout	N.A.	√	√	√
	5.3.1.20 CS104 I-Format APDU	N.A.	√	√	√
	5.3.1.25 CS104 S-Format APDU	N.A.	√	√	√
	5.3.1.30 CS104 U-Format APDU	N.A.	√	√	√
	5.3.1.50 Transmission Procedure	N.A.	√ ^{2, 3}	√	N.A.
	5.3.1.70 Transmission Control Using START/STOP	N.A.	√	√	N.A.
	5.3.1.90 Time Out Intervals	N.A.	√ ⁴	√	N.A.

¹ Three different Originator address ranges: 0, 1 to 127 (commands with an originator address within this range will be considered as remote) and 128 to 255 (commands with an originator address within this range will be considered as local).
² When testing this parameter by sending several GI's fast, was observed that DUT stops sending I-frames when ACT_TERM from a GI is issued, even when K-unacknowledged I-Frames is not reached. The DUT does not continue sending I-frames until S-Frame from master is received with the acknowledge to the ACT_TERM message.
³ Tested with K = 2, 8 and 12; and W = 1, 4 and 8.
⁴ Tested with t1 = 10 and 15, t2 = 5 and 10, and t3 = 20 and 15.

	Record the Conformance Test Procedure result for each of the supported configuration parameter values on the right	Station Type		Direction	
		Controlling station	Controlled station	Normal Direction	Reversed Direction
	✓.....indicates the Test Procedure PASSED for that configuration value. FAIL.....indicates Test Procedure failed for at least one of the Test Cases. N.A.....indicates that configuration value is not supported by the device. Empty.....indicates the Test Procedure was not performed. (There should be no empty boxes when testing is complete).				
Verification of Data Unit Identifier	5.3.2.1 Type Identification	N.A.	✓	✓	✓
	5.3.2.10 Cause of Transmission	N.A.	✓	✓	✓
	5.3.2.20 Common Address of ASDU	N.A.	✓	✓	✓
Verification of ASDUs	5.3.3.10 ASDU 1 Single-point Information	N.A.	✓	✓	✓
	5.3.3.30 ASDU 3 Double-point Information	N.A.	✓	✓	✓
	5.3.3.50 ASDU 5 Step-position Information	N.A.	✓	✓	✓
	5.3.3.70 ASDU 7 Bitstring of 32 bit	N.A.	✓	✓	✓
	5.3.3.90 ASDU 9 Measured value, normalised value	N.A.	✓	✓	✓
	5.3.3.110 ASDU 11 Measured value, scaled value	N.A.	✓	✓	✓
	5.3.3.130 ASDU 13 Measured value, short floating point number	N.A.	✓	✓	✓
	5.3.3.150 ASDU 15 Integrated Totals	N.A.	✓	✓	✓
	5.3.3.170 ASDU 20 Packed single-point information with status change detection	N.A.	N.A.	N.A.	N.A.
	5.3.3.190 ASDU 21 Measured value, normalised value without quality descriptor	N.A.	N.A.	N.A.	N.A.
	5.3.3.210 ASDU 30 Single-point information with time tag CP56Time2a	N.A.	✓	✓	✓
	5.3.3.230 ASDU 31 Double-point information with time tag CP56Time2a	N.A.	✓	✓	✓
	5.3.3.250 ASDU 32 Step-position information with time-tag CP56Time2a	N.A.	✓	✓	✓
	5.3.3.280 ASDU 33 Bitstring of 32 bit with time-tag CP56Time2a	N.A.	✓	✓	✓
	5.3.3.310 ASDU 34 Measured value, normalised value with time-tag CP56Time2a	N.A.	✓	✓	✓
	5.3.3.340 ASDU 35 Measured value, scaled value with time-tag CP56Time2a	N.A.	✓	✓	✓
	5.3.3.370 ASDU 36 Measured value, short floating point number with time-tag CP56Time2a	N.A.	✓	✓	✓
	5.3.3.400 ASDU 37 Integrated totals with time tag CP56Time2a	N.A.	✓	✓	✓
	5.3.3.430 ASDU 38 Event of protection equipment with time-tag CP56Time2a	N.A.	✓	✓	✓
	5.3.3.460 ASDU 39 Packed start events of protection equipment with time-tag CP56Time2a	N.A.	✓	✓	✓
5.3.3.490 ASDU 40 Packet output circuit information of protection equipment with time tag CP56Time2a	N.A.	✓	✓	✓	
5.3.4.1 ASDU 45 Single Command	N.A.	✓	✓	✓	

	Record the Conformance Test Procedure result for each of the supported configuration parameter values on the right	Station Type		Direction	
		Controlling station	Controlled station	Normal Direction	Reversed Direction
	<p>√.....indicates the Test Procedure PASSED for that configuration value. FAIL.....indicates Test Procedure failed for at least one of the Test Cases. N.A.....indicates that configuration value is not supported by the device. Empty.....indicates the Test Procedure was not performed. (There should be no empty boxes when testing is complete).</p>				
5.3.4.10	ASDU 46 Double Command	N.A.	√	√	√
5.3.4.20	ASDU 47 Regulating step command	N.A.	√	√	√
5.3.4.30	ASDU 48 Set point command, normalised value	N.A.	√	√	√
5.3.4.40	ASDU 49 Set point command, scaled value	N.A.	√	√	√
5.3.4.50	ASDU 50 Set point command, short floating point value	N.A.	√	√	√
5.3.4.60	ASDU 51 Bitstring of 32 bits	N.A.	N.A.	N.A.	N.A.
5.3.4.70	ASDU 58 Single command with time tag CP56Time2a	N.A.	√	√	√
5.3.4.90	ASDU 59 Double command with time tag CP56Time2a	N.A.	√	√	√
5.3.4.110	ASDU 60 Regulating step command with time tag CP56Time2a	N.A.	√	√	√
5.3.4.130	ASDU 61 Set point command, normalised value with time tag CP56Time2a	N.A.	√	√	√
5.3.4.150	ASDU 62 Set point command, scaled value with time tag CP56Time2a	N.A.	√	√	√
5.3.4.170	ASDU 63 Set point command, short floating point value with time tag CP56Time2a	N.A.	√	√	√
5.3.4.190	ASDU 64 Bitstring of 32 bits with time tag CP56Time2a	N.A.	N.A.	N.A.	N.A.
5.3.5.1	ASDU 70 End of Initialisation	N.A.	√	√	√
5.3.6.1	ASDU 100 Interrogation command	N.A.	√	√	√
5.3.6.10	ASDU 101 Counter interrogation command	N.A.	√	√	N.A.
5.3.6.20	ASDU 102 Read command	N.A.	N.A.	N.A.	N.A.
5.3.6.30	ASDU 103 Clock synchronisation command	N.A.	N.A.	N.A.	N.A.
5.3.6.60	ASDU 105 Reset process command	N.A.	√	√	N.A.
5.3.7.70	ASDU 107 Test command with time tag CP56Time2a	N.A.	√	√	√
5.3.7.1	ASDU 110 Parameter of measured value, normalised value	N.A.	√	√	N.A.
5.3.7.10	ASDU 111 Parameter of measured values, scaled value	N.A.	√	√	N.A.
5.3.7.20	ASDU 112 Parameter of measured values, short floating point number	N.A.	√	√	N.A.
5.3.7.30	ASDU 113 Parameter activation	N.A.	N.A.	N.A.	N.A.

	Record the Conformance Test Procedure result for each of the supported configuration parameter values on the right	Station Type		Direction	
		Controlling station	Controlled station	Normal Direction	Reversed Direction
	✓.....indicates the Test Procedure PASSED for that configuration value. FAIL.....indicates Test Procedure failed for at least one of the Test Cases. N.A.....indicates that configuration value is not supported by the device. Empty.....indicates the Test Procedure was not performed. (There should be no empty boxes when testing is complete).				
	5.3.8.1 ASDU 120 File ready	N.A.	✓	✓	N.A.
	5.3.8.10 ASDU 121 Section ready	N.A.	✓	✓	N.A.
	5.3.8.30 ASDU 122 Call directory, select file, call file, call section	N.A.	✓	✓	N.A.
	5.3.8.40 ASDU 123 Last section, last segment	N.A.	✓	✓	N.A.
	5.3.8.50 ASDU 124 ACK file, ACK section	N.A.	✓	✓	N.A.
	5.3.8.60 ASDU 125 Segment	N.A.	✓	✓	N.A.
	5.3.8.70 ASDU 126 Directory	N.A.	✓	✓	N.A.
Data Unit Identifier	5.4.9.1 Type Identification	N.A.	✓	✓	✓
	5.4.9.4 Cause Of Transmission	N.A.	✓	✓	✓
	5.4.9.10 Common Address of ASDU	N.A.	✓	✓	✓
Information object address	5.4.10.1 Object Address	N.A.	✓	✓	✓
Station initialisation function	5.4.11.1 Local Initialisation of the Controlling station: (re-)boot	N.A.	N.A.	N.A.	N.A.
	5.4.11.10 Local initialisation of the Controlled station: (re-)boot	N.A.	✓	✓	N.A.
	5.4.11.20 Remote initialisation of the Controlled station	N.A.	✓	✓	N.A.
	5.4.11.30 Re-establishing a lost Started connection between the Controlling and the Controlled station when no other connections are available	N.A.	✓	✓	N.A.
	5.4.11.40 Compatibility With Other Test Cases	N.A.	✓	✓	N.A.
Redundant Link	5.4.12.1 Periodic check of ALL redundant connections	N.A.	✓	✓	N.A.
	5.4.12.10 Re-establishing a lost Started connection between the Controlling and the Controlled station when redundant connections are available: (automatic switch-over)	N.A.	✓ ⁵	✓	N.A.
	5.4.12.20 Re-establishing a lost redundant connection between the Controlling and the Controlled station	N.A.	✓	✓	N.A.

⁵ When a connection is already started and a START DT ACT is sent over another connection, first connection will be closed with an [RST] message in case there are pending messages to be sent or, with an [FIN, PSH, ACK] message if there are not pending messages to be sent.

	Record the Conformance Test Procedure result for each of the supported configuration parameter values on the right	Station Type		Direction	
		Controlling station	Controlled station	Normal Direction	Reversed Direction
	✓.....indicates the Test Procedure PASSED for that configuration value. FAIL.....indicates Test Procedure failed for at least one of the Test Cases. N.A.....indicates that configuration value is not supported by the device. Empty.....indicates the Test Procedure was not performed. (There should be no empty boxes when testing is complete).				
	5.4.12.30 Manual switching over the Started connection to another redundant Stopped connection: (manual switch-over)	N.A.	✓	✓	N.A.
Cyclic data transmission function	5.4.13.1 Cyclic data transmission and Background Scan – sequential procedure	N.A.	✓	✓	✓
	5.4.13.10 Compatibility With Other Test Cases	N.A.	✓	✓	✓
Data acquisition through Read function	5.4.14.1 Data acquisition through Read - sequential procedure	N.A.	N.A.	N.A.	N.A.
	5.4.14.10 Compatibility With Other Test Cases	N.A.	N.A.	N.A.	N.A.
Acquisition of events function	5.4.15.1 Acquisition of events -sequential procedure	N.A.	✓	✓	✓
	5.4.15.10 Compatibility With Other Test Cases	N.A.	✓	✓	✓
General interrogation function	5.4.16.1 Outstation interrogation - one Logical Remote Unit (LRU) available in the controlled station	N.A.	✓	✓	✓
	5.4.16.10 Outstation interrogation - more than one Logical Remote Unit (LRU) available in the controlled station	N.A.	N.A.	N.A.	N.A.
	5.4.16.20 Re-activate a running Outstation interrogation - Option 1: the running GI continues.	N.A.	N.A.	N.A.	N.A.
	5.4.16.30 Re-activate a running Outstation interrogation - Option 2: the running GI is stopped and the second GI is started.	N.A.	N.A.	N.A.	N.A.
	5.4.16.40 Re-activate a running Outstation interrogation - Option 3: the running GI continues and after activation termination (COT=10) the second GI is started. (Option 3 can be described as undesirable behaviour!!)	N.A.	✓	✓	N.A.
	5.4.16.50 Deactivate a running Outstation interrogation	N.A.	N.A.	N.A.	N.A.
	5.4.16.60 Compatibility With Other Test Cases	N.A.	✓	✓	N.A.
Clock synchronisation function	5.4.17.1 Clock synchronisation -sequential procedure	N.A.	N.A. ⁶	N.A.	N.A.
	5.4.17.10 Clock synchronisation – Change the clock	N.A.	N.A.	N.A.	N.A.
	5.4.17.20 Compatibility With Other Test Cases	N.A.	N.A.	N.A.	N.A.
Command	5.4.18.1 Select & Execute	N.A.	✓	✓	✓

⁶ The SUT synchronizes through NTP protocol.

	Record the Conformance Test Procedure result for each of the supported configuration parameter values on the right	Station Type		Direction	
		Controlling station	Controlled station	Normal Direction	Reversed Direction
	√.....indicates the Test Procedure PASSED for that configuration value. FAIL.....indicates Test Procedure failed for at least one of the Test Cases. N.A.....indicates that configuration value is not supported by the device. Empty.....indicates the Test Procedure was not performed. (There should be no empty boxes when testing is complete).				
transmission function	5.4.18.10 Select & Deactivation	N.A.	√	√	√
	5.4.18.20 Direct Execute	N.A.	√	√	√
	5.4.18.30 Select with Negative Confirmation by Controlled station (Abort)	N.A.	√	√	√
	5.4.18.40 Select with Negative Execute Confirmation by Controlled station if Execute is received after configured delay in the controlling station	N.A.	√ ⁷	√	N.A.
	5.4.18.50 Direct Execute with Negative Confirmation by Controlled station	N.A.	√	√	√
	5.4.18.60 Command transmission with network delay supervision - sequential procedure: Command received WITHIN configured delay	N.A.	√	√	N.A.
	5.4.18.70 Command transmission with network delay supervision - sequential procedure: Command received AFTER configured delay	N.A.	√ ⁸	√	N.A.
	5.4.18.80 Test for all supported ASDU's	N.A.	√ ⁹	√	N.A.
	5.4.18.90 Compatibility With Other Test Cases	N.A.	√	√	N.A.
Transmission of integrated totals (telecounting) function	5.4.19.1 Mode A - Local freeze with spontaneous transmission	N.A.	√ ¹⁰	√	√
	5.4.19.10 Mode B - Local freeze with Counter Interrogation	N.A.	N.A.	N.A.	N.A.
	5.4.19.20 Mode C – Remote initiated freeze with Counter Interrogation	N.A.	√	√	N.A.
	5.4.19.30 Mode D – Remote initiated freeze with spontaneous transmission	N.A.	N.A.	N.A.	N.A.
	5.4.19.40 Compatibility With Other Test Cases	N.A.	√	√	N.A.
Parameter loading function	5.4.20.1 Load and activate parameter	N.A.	√ ¹¹	√	N.A.
	5.4.20.10 Load and activate parameter with Negative Confirmation by Controlled station	N.A.	√	√	N.A.
	5.4.20.20 Compatibility With Other Test Cases	N.A.	√	√	N.A.

⁷ Tested with a delay of 10 seconds.

⁸ The configured network delay to determine whether a command should be rejected or not is 30 min.

⁹ Regulating Step Command is not supporting "persistent output" command qualifier.

¹⁰ Only one freeze interval is supported, this means, all counters have to be freezed at the same time.

¹¹ When a value out of range is sent, the command is rejected.

	Record the Conformance Test Procedure result for each of the supported configuration parameter values on the right	Station Type		Direction	
		Controlling station	Controlled station	Normal Direction	Reversed Direction
	√.....indicates the Test Procedure PASSED for that configuration value. FAIL.....indicates Test Procedure failed for at least one of the Test Cases. N.A.....indicates that configuration value is not supported by the device. Empty.....indicates the Test Procedure was not performed. (There should be no empty boxes when testing is complete).				
Test procedure function	5.4.21.1 Test procedure - sequential procedure	N.A.	√	√	√
	5.4.21.10 Compatibility With Other Test Cases	N.A.	√	√	√
File transfer procedure function	5.4.22.1 File transfer procedure (monitor direction) – sequential procedure	N.A.	√	√	N.A.
	5.4.22.10 File transfer procedure (control direction) – sequential procedure	N.A.	√ ¹²	√	N.A.
	5.4.22.20 Compatibility With Other Test Cases	N.A.	√	√	N.A.
Additional Conformance Test Procedures	5.4.23.1 Out of service behaviour	N.A.	√	√	N.A.
	5.4.23.10 Miscellaneous	N.A.	√	√	N.A.
	5.4.23.20 Time invalid	N.A.	√	√	N.A.
	5.4.23.30 Compatibility With Other Test Cases	N.A.	√	√	N.A.
Negative Conformance Test Procedures	5.4.24.1 TCP/IP Connection with unknown IP address	N.A.	√ ¹³	√	N.A.
	5.4.24.2 Quality descriptor	N.A.	√	√	√
	5.4.24.3 Command transmission	N.A.	√	√	√
	5.4.24.4 Summer time – Summer time bit is taken into account when using commands and events	N.A.	√	√	√
	5.4.24.50 Compatibility With Other Test Cases	N.A.	√	√	N.A.
PIXIT related Conformance Test Procedures	5.4.25.1 Multiple commands	N.A.	N.A.	N.A.	N.A.
	5.4.25.50 Overflow	N.A.	N.A.	N.A.	N.A.
	5.4.25.100 Function:	N.A.	N.A.	N.A.	N.A.

¹² When a file is sent with wrong checksum, the RTU disables the file transmission and rejects File Transfer retries.

¹³ SUT accepts connection from IP's 172.20.241.127 and 172.20.241.129.

APPENDIX B-1 – TEST RESULTS OF SINGLE COMMAND TRANSMISSION

<p>TEST RESULTS OF THE SINGLE COMMAND (SCO)</p> <p>‘√’ = tested ‘-’ = not tested</p> <p>Detailed information on enclosures per Command type. The datalink services are not shown in the details, only the command ASDUs. Each IOA could be configured S/E or only E. S+E on/off = Select & Execute command on/off S & D = Select & Deactivate command on/off E on/off = Direct Execute command on/off</p>			<p>ACTCONpos=Positive Activation Confirmation ACTCONneg=Negative Activation Confirmation DEACTCONpos=Deactivation Confirmation positive ACTTERM=Activation Termination</p> <p>If ACTTERM is stated in row ‘message from the RTU’, ACTCONpos with S/E=0 execute has been received before. In case of a S+E command also ACTCONpos with S/E=1 select has been received before the ACT with S/E=0!</p> <p>NOTE: this table shows the only correct behaviour. Other behaviour means the test failed!</p>			
ASDU type = 45	S+E on	S+E off	S+D on	S+D off	Eon	Eoff
QU=0 (no add. def.)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=1 (short pulse)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=2 (long pulse)						

Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=3 (persistent)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
General remarks	•					

<p>TEST RESULTS OF THE SINGLE COMMAND (SCO)</p> <p>√ = tested - = not tested</p> <p>Detailed information on enclosures per Command type. The datalink services are not shown in the details, only the command ASDUs. Each IOA could be configured S/E or only E. S+E on/off = Select & Execute command on/off S & D = Select & Deactivate command on/off E on/off = Direct Execute command on/off</p>			<p>ACTCONpos=Positive Activation Confirmation ACTCONneg=Negative Activation Confirmation DEACTCONpos=Deactivation Confirmation positive ACTTERM=Activation Termination</p> <p>If ACTTERM is stated in row 'message from the RTU', ACTCONpos with S/E=0 execute has been received before. In case of a S+E command also ACTCONpos with S/E=1 select has been received before the ACT with S/E=0!</p> <p>NOTE: this table shows the only correct behaviour. Other behaviour means the test failed!</p>			
ASDU type = 58	S+E on	S+E off	S+D on	S+D off	Eon	Eoff
QU=0 (no add. def.)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available

Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=1 (short pulse)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=2 (long pulse)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=3 (persistent)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
General remarks	•					

Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=3 (persistent)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
General remarks	•					

<p>TEST RESULTS OF THE DOUBLE COMMAND (DCO) '√' = tested '-' = not tested Detailed information on enclosures per Command type. The datalink services are not shown in the details, only the command ASDUs. Each IOA could be configured S/E or only E. S+E on/off = Select & Execute command on/off S & D = Select & Deactivate command on/off E on/off = Direct Execute command on/off</p>			<p>ACTCONpos=Positive Activation Confirmation ACTCONneg=Negative Activation Confirmation DEACTCONpos=Deactivation Confirmation positive ACTTERM=Activation Termination If ACTTERM is stated in row 'message from the RTU', ACTCONpos with S/E=0 execute has been received before. In case of a S+E command also ACTCONpos with S/E=1 select has been received before the ACT with S/E=0! NOTE: this table shows the only correct behaviour. Other behaviour means the test failed!</p>			
ASDU type = 59	S+E on	S+E off	S+D on	S+D off	Eon	Eoff
QU=0 (no add. def.)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=1 (short pulse)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select	E	E	S or E	S or E	E	E

/ Execute						
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=2 (long pulse)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=3 (persistent)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
General remarks	•					

Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=3 (persistent)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	N.S.	N.S.	N.S.	N.S.	N.S.	N.S.
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
General remarks	•					

<p>TEST RESULTS OF THE REGULATING STEP COMMAND (RCO)</p> <p>√ = tested √ = not tested</p> <p>Detailed information on enclosures per Command type. The datalink services are not shown in the details, only the command ASDUs. Each IOA could be configured S/E or only E. S+E on/off = Select & Execute command on/off S & D = Select & Deactivate command on/off E on/off = Direct Execute command on/off</p>			<p>ACTCONpos=Positive Activation Confirmation ACTCONneg=Negative Activation Confirmation DEACTCONpos=Deactivation Confirmation positive ACTTERM=Activation Termination</p> <p>If ACTTERM is stated in row 'message from the RTU', ACTCONpos with S/E=0 execute has been received before. In case of a S+E command also ACTCONpos with S/E=1 select has been received before the ACT with S/E=0!</p> <p>NOTE: this table shows the only correct behaviour. Other behaviour means the test failed!</p>			
ASDU type = 60	S+E on	S+E off	S+D on	S+D off	Eon	Eoff
QU=0 (no add. def.)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=1 (short pulse)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select	E	E	S or E	S or E	E	E

/ Execute						
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=2 (long pulse)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√	√	√	√
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
QU=3 (persistent)						
Message from RTU	ACTTERMpos	ACTTERMpos	DEACTCONpos	DEACTCONpos	ACTTERMpos	ACTTERMpos
Shown behaviour after Select / Execute	E	E	S or E	S or E	E	E
Status change RTU	Yes, HMI	Yes, HMI	No	No	Yes, HMI	Yes, HMI
Status change process	If available	If available	No	No	If available	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	N.S.	N.S.	N.S.	N.S.	N.S.	N.S.
Log file available (Y/N)?	Y	Y	Y	Y	Y	Y
General remarks	•					

APPENDIX B-4 – TEST RESULTS OF SETPOINT COMMAND TRANSMISSION

<p>TEST RESULTS OF THE SETPOINT COMMAND (IEEE STD 754) 'X' = tested '-' = not tested Detailed information on enclosures per Command type. The datalink services are not shown in the details, only the command ASDUs. Each IOA could be configured S/E or only E. They should not be able to support both at a time. S+E on/off = Select & Execute command on/off S & D = Select & Deactivate command on/off E on/off = Direct Execute command on/off</p>		<p>ACTCONpos=Positive Activation Confirmation ACTCONneg=Negative Activation Confirmation DEACTCONpos=Deactivation Confirmation positive ACTTERM=Activation Termination If ACTTERM is stated in row 'message from the RTU', ACTCONpos with S/E=0 execute has been received before. In case of a S+E command also ACTCONpos with S/E=1 select has been received before the ACT with S/E=0! NOTE: this table shows the only correct behaviour. Other behaviour means the test failed!</p>	
ASDU type = 48	S+E	S+D	E
QL=0			
Message from RTU	ACTCONpos / ACTTERMpos	DEACTCONpos	ACTCONpos / ACTTERMpos
After S or E	E	S or E	E
Status change RTU	Yes, HMI	No	Yes, HMI
Status change process	If available	No	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√
Log files available (Y/N)?	Y	Y	Y
ASDU type = 49	S+E	S+D	E
QL=0			
Message from RTU	ACTCONpos / ACTTERMpos	DEACTCONpos	ACTCONpos / ACTTERMpos
After S or E	E	S or E	E
Status change RTU	Yes, HMI	No	Yes, HMI
Status change process	If available	No	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√
Log files available (Y/N)?	Y	Y	Y



ASDU type = 50	S+E	S+D	E
QL=0			
Message from RTU	ACTCONpos / ACTTERMpos	DEACTCONpos	ACTCONpos / ACTTERMpos
After S or E	E	S or E	E
Status change RTU	Yes, HMI	No	Yes, HMI
Status change process	If available	No	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√
Log files available (Y/N)?	√	√	√
General remarks	•		

<p>TEST RESULTS OF THE SETPOINT COMMAND (IEEE STD 754)</p> <p>'X' = tested '-' = not tested</p> <p>Detailed information on enclosures per Command type. The datalink services are not shown in the details, only the command ASDUs. Each IOA could be configured S/E or only E. They should not be able to support both at a time. S+E on/off = Select & Execute command on/off S & D = Select & Deactivate command on/off E on/off = Direct Execute command on/off</p>	<p>ACTCONpos=Positive Activation Confirmation ACTCONneg=Negative Activation Confirmation DEACTCONpos=Deactivation Confirmation positive ACTTERM=Activation Termination If ACTTERM is stated in row 'message from the RTU', ACTCONpos with S/E=0 execute has been received before. In case of a S+E command also ACTCONpos with S/E=1 select has been received before the ACT with S/E=0! NOTE: this table shows the only correct behaviour. Other behaviour means the test failed!</p>		
ASDU type = 61	S+E	S+D	E
QL=0			
Message from RTU	ACTCONpos / ACTTERMpos	DEACTCONpos	ACTCONpos / ACTTERMpos
After S or E	E	S or E	E
Status change RTU	Yes, HMI	No	Yes, HMI
Status change process	If available	No	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√
Log files available (Y/N)?	Y	Y	Y
ASDU type = 62	S+E	S+D	E
QL=0			



Message from RTU	ACTCONpos / ACTTERMpos	DEACTCONpos	ACTCONpos / ACTTERMpos
After S or E	E	S or E	E
Status change RTU	Yes, HMI	No	Yes, HMI
Status change process	If available	No	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√
Log files available (Y/N)?	Y	Y	Y

ASDU type = 62	S+E	S+D	E
QL=0			
Message from RTU	ACTCONpos / ACTTERMpos	DEACTCONpos	ACTCONpos / ACTTERMpos
After S or E	E	S or E	E
Status change RTU	Yes, HMI	No	Yes, HMI
Status change process	If available	No	If available
Required	PICS, 9.5 8.6	PICS, 9.5 8.6	PICS, 9.5 8.6
Result	√	√	√
Log files available (Y/N)?	Y	Y	Y