

Intelligent Detection Devices

Multi-Criteria Fire Detector

Model OH921

ARCHITECT AND ENGINEER SPECIFICATIONS

- Multi-criteria addressable fire detector that incorporates photoelectric and thermal sensors
- Compatible with device programmer / loop tester, Model DPU
- Responds to both flaming and smoldering-fire signatures
- Polarity insensitive utilizing *SureWire™* technology
- Tri-color detector status LED with 360° viewing
- Remote sensitivity-measurement capability
- Field-selectable application profiles
- Each detector is self-testing:
 - complete diagnostics performed every 10 seconds
 - self monitored for sensitivity within @UL Listed limits
- Superior EMI immunity
- Compatible with DB-11 series mounting bases
- Compatible with FireFinder® XLS (with Siemens Model 'H'-series devices on same loop)
- Listed and approved as heat detector
 - Rate-of-Rise Detection: 15°F / min. (8.3°C / min), and fixed 135°F (57°C)
- RoHS compliant



- Automatic environment compensation
- @UL Listed and @ULC Listed; FM (#3230, 3210), CSFM (#7272-0067:0258) Approved

Product Overview

The Model OH921 photoelectric detector incorporates both optical and thermal sensors, and uses signals in a neural network to create an intelligent multi-criteria detector. The encompassing result is a detector that provides enhanced detection to a wide range of products of combustion.

Model OH921 utilizes advanced multi-criteria detection technology. The multi-criteria detector also has state-of-the-art microprocessor circuitry (with error check), as well as detector self-diagnostics and supervision programs that is used on Cerberus PRO 50-point (Model FC901), 252-point (Model FC922 / FV922) and 504-point (Model FC924 / FV924) addressable fire alarm control panels (FACPs).

Additionally, Model OH921 is a plug-in, addressable, two-wire and multi-criteria detector (with both photoelectric and thermal inputs) that is compatible with FireFinder® XLS systems.

Model OH921 is compatible with the Siemens – Fire Safety field-device programmer / test unit. Model DPU is a compact, portable, menu-driven accessory for electronically programming and testing detectors, easily and reliably.


Model DPU eliminates the need for cumbersome, unreliable mechanical programming methods, such as dials or switches, and reduces installation and service costs by electronically programming and testing the detector prior to installation.

Cerberus® PRO
Fire Safety Products

9900
Multi-Criteria Fire Detector

Product Overview — (continued)

Each detector consists of a dust-resistant photoelectric chamber; a solid state, non-mechanical thermal sensor, and microprocessor-based electronics with a low-profile plastic housing. Every Model OH921 fire detector is shipped with a protective dust cover:

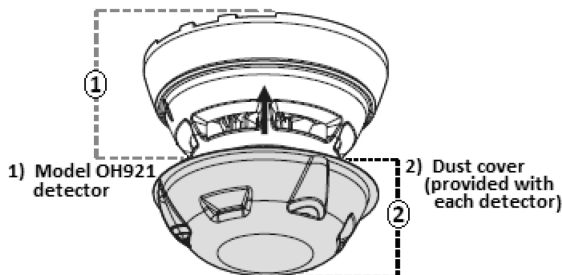


Operation

Model OH921 utilizes an infrared light emitting diode (IRLED), and infrared light-sensing photodiode. Under normal conditions, light transmitted by the LED is directed away from the photodiode and scattered through the smoke chamber in a controlled pattern.

The smoke chamber is designed to manage light dissipation and extraneous reflections from dust particles or other non-smoke, airborne contaminants in such a way as to maintain stable, consistent detector operation. When smoke enters the detector chamber, light emitted from the IRLED is scattered by the smoke particles, and is received by the photodiode.

Model OH921 also utilizes a modern, accurate and shock-resistant thermistor to sense temperature changes.

The signal processing with detection algorithms allows the detector to first gather smoke and thermal data, and then analyze this information in the detector's 'neural network.' By comparing data received with the common characteristics of fires or fire signatures, Model OH921 can compare these signals to those of deceptive phenomena that cause other detectors to false alarm.

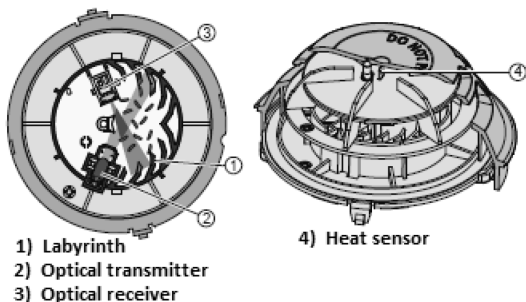

Each Model OH921 detector provides three (3) pre-programmed parameter sets that can be selected by the FACP.

Profile Overview

Model OH921 provides two (2) different alarm sources that can be selected individually (ON or OFF) by the control panel.

Alarm Source 1 (Neural Network) – Combines smoke – heat with the following selectable profiles:

- Sensitive
- Robust
- Standard

Sensitive: This parameter set is practically suitable for areas where few misleading sources of false alarm are present, and is appropriate where priority is given to detecting open fires as soon as possible (e.g. – typically a clean application with controlled environmental conditions.)

Robust: This parameter set offers improved resistance to false alarms in areas where misleading sources, such as cigarette smoke or exhaust fumes, may cause a nuisance alarm.

Standard: This parameter set is practically apt for normal office, hotel lobby type applications and is the default setting.

Alarm Source 2 (Thermistor) – Heat only, provides the following:

- Static / fixed at 135°F (57°C), default setting
- Rate-of-Rise Detection: 15°F / min. (8.3°C / min)

If the detector is not programmed, Model OH921 will default to a 'standard' profile setting, which allows operation for a normal office-type environment.

Model OH921 contains a tri-color LED indicator, capable of flashing any one (1) of three (3) distinct colors: **GREEN**, **YELLOW**, or **RED**. During each flash interval, the microprocessor-based detector monitors the following:

- Smoke in its sensing chamber
- Smoke sensitivity is within the range indicated on the nameplate label
- Internal sensors and electronics

Based on the results of the monitoring, the LED indicator flashes the following:

Flash Color	Condition	Flash Interval (in seconds)
Green*	Normal supervisory operation. Smoke sensitivity is within rated limits.	10
Yellow:	Detector is in trouble and needs replacement.	4
Red:	Alarm condition.	1
No Flash:	Detector is not powered.	—

* LED can be turned OFF.

Please follow the corresponding description of the panel used.

Installation

All Model OH921 detectors use a surface-mounting base, Model DB-11 or Model DB-11E, which mounts on a 4-inch octagonal, square or single-gang electrical box. The base utilizes screw-clamp contacts for electrical connections and self-wiping contacts for increased reliability.

The Model DB-11 base can be used with the optional Model LK-11 detector locking kit, which contains 50 detector locks and an installation tool to prevent unauthorized removal of the detector head. Model DB-11 has decorative plugs to cover the outer mounting screw holes.

Model OH921 may be installed on the same initiating circuit with the Siemens Model 'H'-series detectors (Models HFP-11 and HFPT-11); Model 'HMS'-series manual stations; Model 'HTRI'-series interfaces; Model HCP output-control devices, or Model 'HZM'-series of addressable, conventional zone modules for FireFinder XLS control panels.

All Model OH921 detectors are approved for operation within the UL -specified temperature range of 32 to 100°F (0 to 38°C).

Model DPU

The Device Program / Test Unit accessory is used to program and verify the address of the detector. The technician selects the accessory's program mode, and enters the desired address. Model DPU automatically sets and verifies the address and tests the detector.

Model DPU operates on AC power or rechargeable batteries, providing flexibility and convenience in programming and testing equipment from practically any location.

When in the test mode, Model DPU will perform a series of diagnostic tests without altering the address or other stored data, allowing technicians to determine if the detector is operating properly.

Application Data

Installation of the Model OH921 series of fire detectors requires a two-wire circuit. In many retrofit cases, existing wiring may be used. 'T-tapping' is permitted only for 'Style 4' (Class B) wiring. Model OH921 is polarity insensitive, which can greatly reduce installation and debugging time.


Model OH921 fire detectors can be applied within the maximum 30-foot center spacing (900 sq. ft. areas,) as referenced in NFPA 72. This application guideline is based on ideal conditions, specifically, smooth ceiling surfaces, minimal air movement, and no physical obstructions between potential fire sources and the actual detector. Do not mount detectors in close proximity to ventilation or heating and air conditioning outlets. Exposed joints or beamed ceilings may also affect safe spacing limitations for detectors.

Should questions arise regarding detector placement, observe NFPA 72 guidelines. Good fire-protection system engineering and common sense dictate how and when fire detectors are installed and used. Contact your local Siemens Industry – Fire Safety distributor or sales office whenever you need assistance applying Model OH921 in unusual applications. Be sure to follow NFPA guidelines and UL Listed / ULC Listed installation instructions – included with every Siemens – Fire Safety detector – and local codes as for all fire protection equipment.

Technical Data

Operating Temperatures:	+32°F (0°C) to 100°F (38°C)
Relative Humidity:	0 - 95%; non-condensing
Air Velocity:	0 - 4,000 ft. / min (0-20m / sec)
Air Pressure:	No effect
Maximum Spacing:	30-foot centers (900 sq. ft.), per NFPA 72 and ULC -S524 Listed
Input Voltage Range:	16VDC – 30VDC
Alarm Current:	280 μ A, max.
Standby Current:	280 μ A, max. (average)
Thermal Rating:	<ul style="list-style-type: none">Fixed-temperature set point: 135°F (57°C)Rate-of-Rise Detection: 15°F / min. (8.3°C / min)
Detector Weight:	0.317 lbs. (0.144 kg.)
Mechanical Protection Guard:	UL Listed / ULC Listed with STI Guard Model STI-9604

Mounting Diagram Dimensions

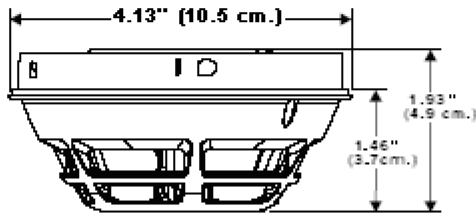

Compatible FACP

Model	Data Sheet Number	Description
—	6300	FireFinder XLS
FC901	9813	50-point FACP
FC922	9815	252-point addressable FACP
FV922	9821	252-point intelligent voice communication panel
FC924	9815	504-point addressable FACP
FV924	9821	504-point intelligent voice communication panel

Details for Ordering

Model	Part Number	Description
OH921	S54320-F6-A2	Addressable Multi-Criteria Fire Detector
DB-11	500-094151	Detector Mounting Base for Series 11
DB-11 E	500-094151E	Detector Base {small}
RL-HC	500-033230	Remote Alarm Indicator: 4" octagon-box mount, red
RL-HW	500-033310	Remote Alarm Indicator: single-gang box mount, red
LK-11	500-695350	Base Locking Kit for Series 11 Detectors

STI-9604	—	STI Mechanical Protection Guard
----------	---	---------------------------------

See: www.STI-USA.com for further details on ordering Model STI-9604.

In Canada, order:

Model	Part Number	Description
DB-11C	500-095687	Detector Mounting Base for Series 11 Detectors (ULC Listed)

SIEMENS Cerberus® PRO

Siemens Industry, Inc. — Building Technologies Div.
8 Fernwood Road • Florham Park, NJ 07932
Tel: (973) 593-2600 • Fax: (908) 547-6877
Web: www.USA.Siemens.com/Cerberus-PRO

NOTICE — The information contained in this data-sheet document is intended only as a summary, and is subject to change without notice. The devices described here have specific instruction sheets that cover various technical, limitation and liability information.

Copies of these instruction sheets and the *General Product Warning and Limitations* document, which also contains important information, are provided with the product and, are available from the Manufacturer.

Information contained in these documents should be consulted before specifying or using the product. For further information or assistance concerning particular problems contact the Manufacturer.