

SIEMENS

Rainproof Combination Metering

Catalog Number

MM0406L1200RHJB

Panelboard Rating:

200 Amps, Max

120/240 Volts ~, 1 phase, 3 wire

208Y/120 Volts ~, 1 phase, 3 wire

(Derived from 3 phase - 4 wire system)

Meter Socket Rating:


200 Amps Continuous

**Suitable Only For Use As
Service Equipment**

**For Overhead or Underground
Service**

**Use 60/75° C Copper or
Aluminum Conductor** in

Terminals A, B, N1, N2, N3 and N4.

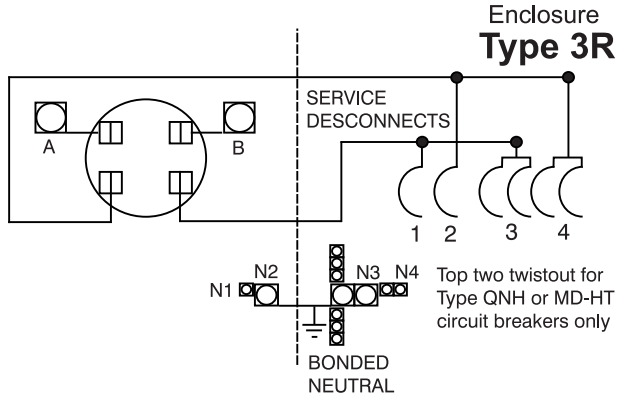

- 1 _____
- 2 _____
- 3 _____
- 4 _____

Accessories

Filler Plate Cat. No. QF3

If hub is required, the catalog numbers listed below may be used on this enclosure:	
Trade size (in)	Catalog number
1 ¼"	EC38597-2
1 ½"	EC38598-2
2"	EC38599-2
2 ½"	EC38600-2

General Information:

Remove twistout from deadfront only when breakers will be installed. All openings must be filled with breakers or filled plates.

Circuit breaker overload trip position is indicated by handle position midway between ON and OFF. To reset, move handle to OFF position then turn ON. For installation in accordance with all local Electrical codes and/or the National Electrical Code.®

Terminal	Wire Size	Torque
A, B	250 kcmil - #6	275 lb. In.
N1	#2 - #3	50 lb. In.
	#4 - #6	45 lb. In.
	#8	40 lb. In.
	#10 - #14	35 lb. In.
N2	250 kcmil - #6	275 lb. In.
N3	250 kcmil - #4	275 lb. In.
N4	1/0 - #14	120 lb. In.
Branch breaker terminals	See Markings on breaker	
Neutral Bar	#10 - 14 Cu/ #10 - 12 Al	20 lb. In.
	#8	25 lb. In.
	#6	35 lb. In.
	#4	35 lb. In.

Short Circuit Current Rating (Watt-hour Meter not included in short circuit rating)

This panelboard has a maximum short circuit rating of 22,000 RMS symmetrical amperes, 120/240 V~. The actual rating is equal to the lowest rating of any breaker installed. Any circuit breaker is replaced or added in this panelboard must be manufactured by Siemens or Murray and must be the types listed below.

Assembled in Mexico

Siemens Industry, Inc.
Norcross, Georgia U.S.A.

J2

4099557 Rev E

MANUFACTURED DATE:

Important

This equipment has been designed for use only with or Siemens Type QP, QT, QPF, QPHF, QE, QEH, QAF, QAFH, QN, QNH, or Murray Type, MP-T, MP-GT, MP-HGT, MP-HT, MH-T, MP-AT, MP-HAT, MP-ET, MP-HET, MD-HT or MD-T circuit breakers. Use of other circuit breakers in this equipment will void the warranty.

Do not spray or allow any petroleum based chemicals, solvents, or paint to contact interior components.

®The National Electrical Code is a registered trademark of the National Fire Protection Association.

© 2015 Copyright Siemens Industry, Inc.