INSTRUCTION SHEET FOR CATALOG NUMBERS

MMSCK1 MMSCK2

125A METER SOCKET ASSEMBLY
200A METER SOCKET ASSEMBLY

INSTALLATION INSTRUCTIONS

⚠ DANGER

Hazardous Voltage. Will cause death, serious injury or substantial property damage.

Turn off power supplying this equipment before working inside.

⚠ SAFETY INSTRUCTIONS

Note: These instructions outline the recommended installation procedure. Turn off and lock off the power supplying the device before working inside.

INCLUDED COMPONENTS

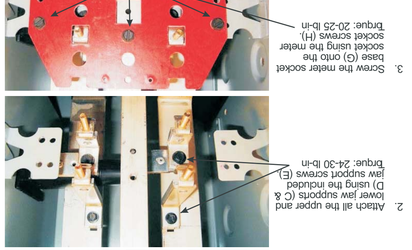

Included Components

A. Meter Jaw Plastic Guide (4)
B. Meter Jaw Steel Guide (4)
C. Upper Jaw Support (2)
D. Lower Jaw Support (2)
E. Jaw Support Screw (4)
F. Jaw Nut (4)
G. Meter Socket Base (1)
H. Meter Socket Base Screw (3)

© 2007 Copyright Siemens Energy & Automation, Inc.

Siemens Energy & Automation, Inc Alpharetta, Georgia U.S.A. Assembled in Mexico 4819937 RevA

PROCEDURE

1. Remove all of the old meter socket components until you are only left with the busbars and the breaker mounting block



2. Attach all the upper and lower jaw supports (C & D) using the included screws (E). Torque: 24-30 lb-in



3. Screw the meter socket base (G) onto the socket using the meter socket screws (H). Torque: 20-25 lb-in



4. Mount set of four meter jaws with steel guides or set of four containing plastic insulated guide as shown. Use the "JAW SELECTION TABLE AND KIT REPLACEMENT GUIDE" located at the back of the instruction sheet to determine what jaws to install



5. The mount meter jaws onto the meter socket base insert the tab so that it hooks onto the base and the notch goes through the support screws as shown.



6. Tighten the assembly using the four jaw nuts (F). Torque: 24-30 lb-in



JAW SELECTION TABLE AND KIT REPLACEMENT GUIDE

Meter Module Catalogs Using Meter Jaw w/Plastic Guide (Item A)			
Generic Catalog	Siemens Catalog	Murray Catalog	Order Kit
M211	WMM2U	NO EQUIV	MMSCK1
M211R	WMM2UR	NO EQUIV	MMSCK1
M211RBL	NO EQUIV	NO EQUIV	MMSCK1
M212	WMM2200U	DG222W	MMSCK2
M212R	WMM2200UR	NO EQUIV	MMSCK2
M212RBL	NO EQUIV	NO EQUIV	MMSCK2
M24AB2	WMM24AB200U	DG242W	MMSCK2
M31R	WMM3U	DG331W	MMSCK1
M31RR	WMM3URR	NO EQUIV	MMSCK1
M31RBL	NO EQUIV	NO EQUIV	MMSCK1
M31RC	WMM3URC	DC331W	MMSCK1
M31RCBL	NO EQUIV	NO EQUIV	MMSCK2
M312	WMM3200U	DG332W	MMSCK2
M312R	WMM3200UR	DG332W	MMSCK2
M312RBL	NO EQUIV	NO EQUIV	MMSCK2
M341	WMM34U	DG341W	MMSCK1
M341R	WMM34UR	NO EQUIV	MMSCK1
M341RBL	NO EQUIV	NO EQUIV	MMSCK1
M341RC	WMM34URC	DC341W	MMSCK1
M341RCBL	NO EQUIV	NO EQUIV	MMSCK2
M342	WMM3420OU	DG342W	MMSCK2
M342R	WMM3420OUR	NO EQUIV	MMSCK2
M342RBL	NO EQUIV	NO EQUIV	MMSCK2
M342RC	WMM3420URC	DC342W	MMSCK2
M342RCBL	NO EQUIV	NO EQUIV	MMSCK2
M41	WMM4U	DG431W	MMSCK1
M41R	WMM4UR	NO EQUIV	MMSCK1
M41RBL	NO EQUIV	NO EQUIV	MMSCK1
M41RC	WMM4URC	DC431W	MMSCK2
M41RCBL	NO EQUIV	NO EQUIV	MMSCK2
M412	WMM4200U	DG432W	MMSCK2
M412R	WMM4200UR	NO EQUIV	MMSCK2
M412RBL	NO EQUIV	NO EQUIV	MMSCK2
M44AB1	WMM44ABU	DG441W	MMSCK1
M44AB1R	WMM44ABUR	NO EQUIV	MMSCK1
M44AB1RBL	NO EQUIV	NO EQUIV	MMSCK1
M44AB1RC	WMM44ABURC	DC441W	MMSCK2
M44AB1RCBL	NO EQUIV	NO EQUIV	MMSCK2
M44AB2	WMM44AB200U	DG442W	MMSCK2
M44AB2R	WMM44AB200UR	NO EQUIV	MMSCK2
M44AB2RBL	NO EQUIV	NO EQUIV	MMSCK2
M44BC1	WMM44BCU	NO EQUIV	MMSCK1
M44BC1R	WMM44BCUR	NO EQUIV	MMSCK1
M44BC1RBL	NO EQUIV	NO EQUIV	MMSCK1
M44BC1RC	WMM44BCURC	NO EQUIV	MMSCK2
M44BC1RCBL	NO EQUIV	NO EQUIV	MMSCK2
M44BC2	WMM44BC200U	NO EQUIV	MMSCK2
M44BC2R	WMM44BC200UR	NO EQUIV	MMSCK2
M44BC2RBL	NO EQUIV	NO EQUIV	MMSCK2
M44CA1	WMM44CAU	NO EQUIV	MMSCK1
M44CA1R	WMM44CAUR	NO EQUIV	MMSCK1
M44CA1RBL	NO EQUIV	NO EQUIV	MMSCK1
M44CA1RC	WMM44CAURC	NO EQUIV	MMSCK2
M44CA1RCBL	NO EQUIV	NO EQUIV	MMSCK2
M44CA2	WMM44CA200U	NO EQUIV	MMSCK2
M44CA2R	WMM44CA200UR	NO EQUIV	MMSCK2
M44CA2RBL	NO EQUIV	NO EQUIV	MMSCK2
M511	WMM5U	DG531W	MMSCK1
M511R	WMM5UR	NO EQUIV	MMSCK1
M511RBL	NO EQUIV	NO EQUIV	MMSCK1
M511RC	WMM5URC	DC531W	MMSCK2
M511RCBL	NO EQUIV	NO EQUIV	MMSCK2
M54AB1	WMM54ABU	DG541W	MMSCK1
M54AB1R	WMM54ABUR	NO EQUIV	MMSCK1
M54AB1RBL	NO EQUIV	NO EQUIV	MMSCK1
M54AB1RC	WMM54ABURC	DC541W	MMSCK2
M54AB1RCBL	NO EQUIV	NO EQUIV	MMSCK2
M54AB2	WMM54AB200U	NO EQUIV	MMSCK2
M54BC1	WMM54BCU	NO EQUIV	MMSCK1
M54BC1R	WMM54BCUR	NO EQUIV	MMSCK1

Meter Module Catalogs Using Meter Jaw w/Steel Guide (Item B)			
Generic Catalog	Siemens Catalog	Murray Catalog	Order Kit
M211RNJ	WMM2URNJ	DC231WN	MMSCK1
M212RNJ	WMM2200RNJ	DC232WN	MMSCK2
M24AB2RNJ	WMM24AB2URNJ	DC242WN	MMSCK2
M31TRNJ	WMM3URNJ	DC331WN	MMSCK1
M312RNJ	WMM3200RNJ	DC332WN	MMSCK2
M341RNJ	WMM34URNJ	DC341WN	MMSCK1
M342RNJ	WMM3420RNJ	DC342WN	MMSCK2
M41TRNJ	WMM4URNJ	DC431WN	MMSCK1
M412RNJ	WMM4200RNJ	DC432WN	MMSCK2
M44AB1RNJ	WMM44ABURNJ	NO EQUIV	MMSCK1
M44AB2RNJ	WMM44AB200RNJ	DC442WN	MMSCK2
M44BC1RNJ	WMM44BCURNJ	NO EQUIV	MMSCK1
M44BC2RNJ	WMM44BC200RNJ	NO EQUIV	MMSCK2
M44CA1RNJ	WMM44CAURNJ	NO EQUIV	MMSCK1
M44CA2RNJ	WMM44CA200RNJ	NO EQUIV	MMSCK2
M511RNJ	WMM5URNJ	DC531WN	MMSCK1
M512RNJ	WMM5200RNJ	DC532WN	MMSCK2
M54AB1RNJ	WMM54ABURNJ	NO EQUIV	MMSCK1
M54AB2RNJ	WMM54AB200RNJ	DC542WN	MMSCK2
M54BC1RNJ	WMM54BCURNJ	NO EQUIV	MMSCK1
M54BC2RNJ	WMM54BC200RNJ	NO EQUIV	MMSCK2
M54CA1RNJ	WMM54CAURNJ	NO EQUIV	MMSCK1
M54CA2RNJ	WMM54CA200RNJ	NO EQUIV	MMSCK2
M61RNJ	WMM6URNJ	DC631WN	MMSCK1
M612RNJ	WMM6200RNJ	DC632WN	MMSCK2

Uni-Pak Catalogs Using Meter Jaw w/Plastic Guide (Item A)			
Generic Catalog	Siemens Catalog	Murray Catalog	Order Kit
SP2211	SP221I	MP221I	MMSCK1
SP2211	SP221I	MP221I	MMSCK1
SP2211RJB	SP221IRJB	MP221IRJB	MMSCK1
SP331I	SP331I	MP331I	MMSCK1
SP3311RJB	SP331IRJB	MP331IRJB	MMSCK1
SP4212	SP4212	MP4212	MMSCK2
SP4212RJB	SP4212RJB	MP4212RJB	MMSCK2
SP4312	SP4312	MP4312	MMSCK2
SP4312RJB	SP4312RJB	MP4312RJB	MMSCK2
SP4411	SP4411	MP4411	MMSCK1
SP4411RJB	SP4411RJB	MP4411RJB	MMSCK1
SP4412	SP4412	MP4412	MMSCK2
SP4412RJB	SP4412RJB	MP4412RJB	MMSCK2
SP4511	SP4511	MP4511	MMSCK1
SP4511RJB	SP4511RJB	MP4511RJB	MMSCK1
SP5411	SP5411	MP5411	MMSCK1
SP5412	SP5412	MP5412	MMSCK2
SP5511	SP5511	MP5511	MMSCK1
SP5511RJB	SP5511RJB	MP5511RJB	MMSCK1
SP5512	SP5512	MP5512	MMSCK2
SP5512RJB	SP5512RJB	MP5512RJB	MMSCK2
SP5611	SP5611	MP5611	MMSCK1
SP5611RJB	SP5611RJB	MP5611RJB	MMSCK1
SP6612	SP6612	MP6612	MMSCK2
SP6612RJB	SP6612RJB	MP6612RJB	MMSCK2

Uni-Pak Catalogs Using Meter Jaw w/Steel Guide (Item B)			
Generic Catalog	Siemens Catalog	Murray Catalog	Order Kit
SP2211RJ	SP221IRJ	MP221IRJ	MMSCK1
SP2212RJ	SP4212RJ	MP4212RJ	MMSCK2
SP4312RJ	SP4312RJ	MP4312RJ	MMSCK2
SP4411RJ	SP4411RJ	MP4411RJ	MMSCK1
SP4412RJ	SP4412RJ	MP4412RJ	MMSCK2
SP5511RJ	SP5511RJ	MP5511RJ	MMSCK1
SP5512RJ	SP5512RJ	MP5512RJ	MMSCK2
SP6611RJ	SP6611RJ	MP6611RJ	MMSCK1
SP6612RJ	SP6612RJ	MP6612RJ	MMSCK2

© 2007 Copyright Siemens Energy & Automation, Inc.

Siemens Energy & Automation, Inc Alpharetta, Georgia U.S.A. Assembled in Mexico 4819937 RevA

FRONT

NOTES:

1. MATERIAL: 11.00 x 17.00" WHITE BOND
2. FOLD IN HALF 11.00 X 8.5, THEN IN QUARTERS 5.5 X 8.5 WITH ENGLISH TITLE VERSION IN FRONT
3. PRINT COLOR: BLACK
4. OBTAIN ARTWORK FROM SIEMENS.

MMSCK1
MMSCK2

HOJA DE INSTRUCCIONES PARA LOS NÚMEROS DE CATÁLOGO

ENSAMBLAJE DE TOMA DE MEDIDOR DE 125 A
ENSAMBLAJE DE TOMA DE MEDIDOR DE 200 A

INSTRUCCIONES DE INSTALACIÓN

⚠ PELIGRO

Riesgo peligroso. Causará la muerte, lesiones graves o daños sustanciales a la propiedad.

Desconecte el suministro de energía eléctrica a este equipo antes de trabajar en su interior.

⚠ INSTRUCCIONES DE SEGURIDAD

Nota: Estas instrucciones describen el procedimiento de instalación recomendado. Desconecte y bloquee el suministro de energía eléctrica a este dispositivo antes de trabajar en su interior.

COMPONENTES INCLUIDOS



Componentes incluidos

A. Guía de plástico de morzada
B. Guía acero de morzada de medición (4)
C. Soporte de morzada superior (2)
D. Soporte de morzada inferior (2)
E. Tuerca de soporte de morzada (4)
F. Base de toma de medidor (1)
G. Tornillo de base de toma de medidor (3)

© 2007 Copyright Siemens Energy & Automation, Inc.

Siemens Energy & Automation, Inc Alpharetta, Georgia E.E.U.U. Ensamblado en México 4819937 RevA

PROCEDIMIENTO

1. Retire todos los componentes de la toma del medidor viejo, hasta dejar sólo las barras de bus y el bloque de montaje del cortacircuitos.



2. Instale los soportes de morzada superior e inferior (C y D) mediante los tornillos de soporte de mordaza provistos (E). Fuerza de torsión: 24-30 lb-pulg



3. Fije la base de la toma del medidor (G) sobre la toma mediante los respectivos tornillos (H). Fuerza de torsión: 20-25 lb-pulg

4. Monte el conjunto de cuatro mordazas de medición con guías de acero, o el conjunto de cuatro mordazas con guías de aislante plástico, según se muestra. Use la «TABLA DE SELECCIÓN DE MORDAZAS Y GUÍA DE REEMPLAZO DE KITS» ubicada al dorso de esta hoja de instrucciones para determinar cuáles mordazas instalar



5. Para montar las mordazas de medición sobre la base de la toma del medidor, inserte el cabo de manera que quede enganchado en la base y que la muesca quede abrazando los tornillos de soporte, como se muestra.



6. Apriete el ensamblaje mediante las cuatro tuercas de mordaza (F). Fuerza de torsión: 24-30 lb-pulg



© 2007 Copyright Siemens Energy & Automation, Inc.

Siemens Energy & Automation, Inc Alpharetta, Georgia, E.E.U.U. Ensamblado en México 4819937 RevA

TABLA DE SELECCIÓN DE MORDAZAS Y GUÍA DE REEMPLAZO DE KITS

Catálogo genérico	Catálogo Siemens	Catálogo Murray	Pedir kit
Catálogo de Uni-Pak que emplean medidor de mordaza con guía de acero (ítem A)			
M211	WMM2U	NO EQUIV	MMSCK1
M211R	WMM2UR	NO EQUIV	MMSCK1
M211RBL	NO EQUIV	NO EQUIV	MMSCK1
M212	WMM2200U	DG222W	MMSCK2
M212R	WMM2200UR	NO EQUIV	MMSCK2
M212RBL	NO EQUIV	NO EQUIV	MMSCK2
M24AB2	WMM24AB200U	DG242W	MMSCK2
M31R	WMM3U	DG331W	MMSCK1
M31RR	WMM3URR	NO EQUIV	MMSCK1
M31RBL	NO EQUIV	NO EQUIV	MMSCK1
M31RC	WMM3URC	DC331W	MMSCK1
M31RCBL	NO EQUIV	NO EQUIV	MMSCK2
M312	WMM3200U	DG332W	MMSCK2
M312R	WMM3200UR	DG332W	MMSCK2
M312RBL	NO EQUIV	NO EQUIV	MMSCK2
M341	WMM34U	DG341W	MMSCK1
M341R	WMM34UR	NO EQUIV	MMSCK1
M341RBL	NO EQUIV	NO EQUIV	MMSCK1
M341RC	WMM34URC	DC341W	MMSCK1
M341RCBL	NO EQUIV	NO EQUIV	MMSCK2
M342	WMM3420OU	DG342W	MMSCK2
M342R	WMM3420OUR	NO EQUIV	MMSCK2
M342RBL	NO EQUIV	NO EQUIV	MMSCK2
M342RC	WMM3420URC	DC342W	MMSCK2
M342RCBL	NO EQUIV	NO EQUIV	MMSCK2
M41	WMM4U	DG431W	MMSCK1
M41R	WMM4UR	NO EQUIV	MMSCK1
M41RBL	NO EQUIV	NO EQUIV	MMSCK1
M41RC	WMM4URC	DC431W	MMSCK2
M41RCBL	NO EQUIV	NO EQUIV	MMSCK2
M412	WMM4200U	DG432W	MMSCK2
M412R	WMM4200UR	NO EQUIV	MMSCK2
M412RBL	NO EQUIV	NO EQUIV	MMSCK2
M44AB1	WMM44ABU	DG441W	MMSCK1
M44AB1R	WMM44ABUR	NO EQUIV	MMSCK1
M44AB1RBL	NO EQUIV	NO EQUIV	MMSCK1
M44AB1RC	WMM44ABURC	DC441W	MMSCK2
M44AB1RCBL	NO EQUIV	NO EQUIV	MMSCK2
M44AB2	WMM44AB200U	DG442W	MMSCK2
M44AB2R	WMM44AB200UR	NO EQUIV	MMSCK2
M44AB2RBL	NO EQUIV	NO EQUIV	MMSCK2
M44BC1	WMM44BCU	NO EQUIV	MMSCK1
M44BC1R	WMM44BCUR	NO EQUIV	MMSCK1
M44BC1RBL	NO EQUIV	NO EQUIV	MMSCK1
M44BC1RC	WMM44BCURC	NO EQUIV	MMSCK2
M44BC1RCBL	NO EQUIV	NO EQUIV	MMSCK2
M44BC2	WMM44BC200U	NO EQUIV	MMSCK2
M44BC2R	WMM44BC200UR	NO EQUIV	MMSCK2
M44BC2RBL	NO EQUIV	NO EQUIV	MMSCK2
M44CA1	WMM44CAU	NO EQUIV	MMSCK1
M44CA1R	WMM44CAUR	NO EQUIV	MMSCK1
M44CA1RBL	NO EQUIV	NO EQUIV	MMSCK1
M44CA1RC	WMM44CAURC	NO EQUIV	MMSCK2
M44CA1RCBL	NO EQUIV	NO EQUIV	MMSCK2
M44CA2	WMM44CA200U	NO EQUIV	MMSCK2
M44CA2R	WMM44CA200UR	NO EQUIV	MMSCK2
M44CA2RBL	NO EQUIV	NO EQUIV	MMSCK2
M511	WMM5U	DG531W	MMSCK1
M511R	WMM5UR	NO EQUIV	MMSCK1
M511RBL	NO EQUIV	NO EQUIV	MMSCK1
M511RC	WMM5URC	DC531W	MMSCK2
M511RCBL	NO EQUIV	NO EQUIV	MMSCK2
M54AB1	WMM54ABU	DG541W	MMSCK1
M54AB1R	WMM54ABUR	NO EQUIV	MMSCK1
M54AB1RBL	NO EQUIV	NO EQUIV	MMSCK1
M54AB1RC	WMM54ABURC	DC541W	MMSCK2
M54AB1RCBL	NO EQUIV	NO EQUIV	MMSCK2
M54AB2	WMM54AB200U	NO EQUIV	MMSCK2
M54BC1	WMM54BCU	NO EQUIV	MMSCK1
M54BC1R	WMM54BCUR	NO EQUIV	MMSCK1

Catálogo genérico	Catálogo Siemens	Catálogo Murray	Pedir kit
Catálogo de Uni-Pak que emplean medidor de mordaza con guía de acero (ítem B)			
M211RNJ	WMM2URNJ	DC231WN	MMSCK1
M212RNJ	WMM2200RNJ	DC232WN	MMSCK2
M24AB2RNJ	WMM24AB2URNJ	DC242WN	MMSCK2
M31TRNJ	WMM3URNJ	DC331WN	MMSCK1
M312RNJ	WMM3200RNJ	DC332WN	MMSCK2
M341RNJ	WMM34URNJ	DC341WN	MMSCK1
M342RNJ	WMM3420RNJ	DC342WN	MMSCK2
M41TRNJ	WMM4URNJ	DC431WN	MMSCK1
M412RNJ	WMM4200RNJ	DC432WN	MMSCK2
M44AB1RNJ	WMM44ABURNJ	NO EQUIV	MMSCK1
M44AB2RNJ	WMM44AB200RNJ	DC442WN	MMSCK2
M44BC1RNJ	WMM44BCURNJ	NO EQUIV	MMSCK1
M44BC2RNJ	WMM44BC200RNJ	NO EQUIV	MMSCK2
M44CA1RNJ	WMM44CAURNJ	NO EQUIV	MMSCK1
M44CA2RNJ	WMM44CA200RNJ	NO EQUIV	MMSCK2
M511RNJ	WMM5URNJ	DC531WN	MMSCK1
M512RNJ	WMM5200RNJ	DC532WN	MMSCK2
M54AB1RNJ	WMM54ABURNJ	NO EQUIV	MMSCK1
M54AB2RNJ	WMM54AB200RNJ	DC542WN	MMSCK2
M54BC1RNJ	WMM54BCURNJ	NO EQUIV	MMSCK1
M54BC2RNJ	WMM54BC200RNJ	NO EQUIV	MMSCK2
M54CA1RNJ	WMM54CAURNJ	NO EQUIV	MMSCK1
M54CA2RNJ	WMM54CA200RNJ	NO EQUIV	MMSCK2
M61RNJ	WMM6URNJ	DC631WN	MMSCK1
M612RNJ	WMM6200RNJ	DC632WN	MMSCK2

Catálogo genérico	Catálogo Siemens	Catálogo Murray	Pedir kit
Catálogo de Uni-Pak que emplean medidor de mordaza con guía de acero (ítem A)			
SP2211	SP221I	MP221I	MMSCK1
SP2211	SP221I	MP221I	MMSCK1
SP2211RJB	SP221IRJB	MP221IRJB	MMSCK1
SP331I	SP331I	MP331I	MMSCK1
SP3311RJB	SP331IRJB	MP331IRJB	MMSCK1
SP4212	SP4212	MP4212	MMSCK2
SP4212RJB	SP4212RJB	MP4212RJB	MMSCK2
SP4312	SP4312	MP4312	MMSCK2
SP4312RJB	SP4312RJB	MP4312RJB	MMSCK2
SP4411	SP4411	MP4411	MMSCK1
SP4411RJB	SP4411RJB	MP4411RJB	MMSCK1
SP4412	SP4412	MP4412	MMSCK2
SP4412RJB	SP4412RJB	MP4412RJB	MMSCK2
SP4511	SP4511	MP4511	MMSCK1
SP4511RJB	SP4511RJB	MP4511RJB	MMSCK1
SP5411	SP5411	MP5411	MMSCK1
SP5412	SP5412	MP5412	MMSCK2
SP5511	SP5511	MP5511	MMSCK1
SP5511RJB	SP5511RJB	MP5511RJB	MMSCK1
SP5512	SP5512	MP5512	MMSCK2
SP5512RJB	SP5512RJB	MP5512RJB	MMSCK2
SP5611	SP5611	MP5611	MMSCK1
SP5611RJB	SP5611RJB	MP5611RJB	MMSCK1
SP6612	SP6612	MP6612	MMSCK2
SP6612RJB	SP6612RJB	MP6612RJB	MMSCK2

Catálogo genérico	Catálogo Siemens	Catálogo Murray	Pedir kit
Catálogo de Uni-Pak que emplean medidor de mordaza con guía de acero (ítem B)			
SP2211RJ	SP221IRJ	MP221IRJ	MMSCK1
SP2212RJ	SP4212RJ	MP4212RJ	MMSCK2
SP4312RJ	SP4312RJ	MP4312RJ	MMSCK2
SP4411RJ	SP4411RJ	MP4411RJ	MMSCK1
SP4412RJ	SP4412RJ	MP4412RJ	MMSCK2
SP5511RJ	SP5511RJ	MP5511RJ	MMSCK1
SP5512RJ	SP5512RJ	MP5512RJ	MMSCK2
SP6611RJ	SP6611RJ	MP6611RJ	MMSCK1
SP6612RJ	SP6612RJ	MP6612RJ	MMSCK2

© 2007 Copyright Siemens Energy & Automation, Inc.

Siemens Energy & Automation, Inc Alpharetta, Georgia, E.E.U.U. Ensamblado en México 4819937 RevA

BACK

DESIGN RESPONSIBILITY LOCATION:
SEA-ITESA2
PRINT DISTRIBUTION
ECN COPIES MUST BE ISSUED TO ALL CHECKED LOCATIONS FOR APPROVAL PRIOR TO CHANGE.

☐ SEA-TUC ☐ SEA-DRM ☐ McPHER
☐ SEA-NOR ☐ DUR-LEB ☐ CHOICE
☐ SEA-EL ☐ DUR-HOU ☐ IC-ASY
☐ SEA-IT2 ☐ SEA-BEL ☐ *

1st ARTICLE	EDR NO.	REV	DATE	DESCRIPTION	BY	APVD	DATE
	06-361J2	A	16JUL07	NEW DRAWING	DM	CHK	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES:
.XX ±.25
.XXX
HOLE DIAMETER ±.005
ANGULAR
UNDIMENSIONED 90° ANGLES ±0°30'

DWN DM DATE 16JUL07

-CONFIDENTIAL- PROPERTY OF
Siemens Energy & Automation, Inc.
Residential Products Division

INSTRUCTION SHEET
MODULAR METERING

SIZE D | ISSUE RELEASE NO. 94-174-03 | DWG. NO. 4819937 | REV A
SCALE 1:1 | DO NOT SCALE DRAWING | SHEET 1 OF 1