

To: SIEMENS  
Attn:  
Fax:

NOTES:

1. SIZE: 3.75" X 6.00" .125 rcr
2. MATERIAL: Semi-Gloss Paper
3. INK COLOR: Black

SIEMENS

---

Enclosed Switch Plug Fuse Type  
General Duty

---

Catalog Number Enclosure  
**LF111NR** **Type 3R**

---

Amperes <b>30</b>	<table style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="3" style="text-align: left; border-bottom: 1px solid black;">Horsepower Rating</th> </tr> <tr> <td style="width: 33%; border-bottom: 1px solid black;">Volts-PH</td> <td style="width: 33%; border-bottom: 1px solid black;">Std.</td> <td style="width: 33%; border-bottom: 1px solid black;">Max.</td> </tr> <tr> <td style="border-bottom: 1px solid black;">120 AC-1Ø</td> <td style="border-bottom: 1px solid black;">½</td> <td style="border-bottom: 1px solid black;">2</td> </tr> </table> <p style="font-size: 8pt; margin: 0;">The starting current of motors more than the standard horsepower rating may require the use of fuses with appropriate time delay characteristics. Continuous load current not to exceed 80 percent of the rating of fuses employed in other than motor circuits.</p>	Horsepower Rating			Volts-PH	Std.	Max.	120 AC-1Ø	½	2
Horsepower Rating										
Volts-PH	Std.	Max.								
120 AC-1Ø	½	2								

---

Wire Connector Information:  
Line / Neutral Terminals: **USE 14-6 Cu/ 12-6 Al 60°/75° C WIRE**  
Load Terminals: **USE 14-8 Cu/ 12-8 Al 60°/75° C WIRE**

WIRE SIZE:	14-10 AWG	8 AWG	6 AWG
NOMINAL TORQUE:	15 LB. IN.	18 LB. IN.	27 LB. IN.

**Fuse & Short Circuit Information:**  
This switch is suitable for use on a circuit capable of delivering not more than 10,000 amperes, rms symmetrical, **240** Volts Maximum. (120 Volts Max. on single pole devices.)

**Accessories and Replacement Parts:**  
**Service Equipment:**  
To bond enclosure to neutral, use No. 10 screw provided. Force the screw through the aluminum seal.

**Hub Information:** Catalog Number: HA075S HA100S HA125S  
¾" 1" 1-¼"  
Use closure plate screws provided, to mount hubs.

**Equipment Ground Bar Kit:** GSGK60. USE **Cu/Al 60°/75° C WIRE**  
WIRE SIZE: **14-10 AWG** **8 AWG** **6 AWG**  
NOMINAL TORQUE: **35 LB. IN.** **40 LB. IN.** **45 LB. IN.**

⚠ DANGER

**HAZARDOUS VOLTAGE. WILL CAUSE DEATH OR SERIOUS INJURY.**

Turn off switch before removing or installing fuses. Turn off power ahead of switch before doing work inside. Close cover before turning power on.


This device has been inspected and tested.  
Inspection Record No.

---

**LISTED**  
ENCLOSED SWITCH  
Issue No. AL-265  
File No. E4776

Pc. No. 410384C01

**Siemens Energy & Automation, Inc.**  
**Bellefontaine, Ohio 43311 U.S.A.**  
**Assembled in Mexico (E)**

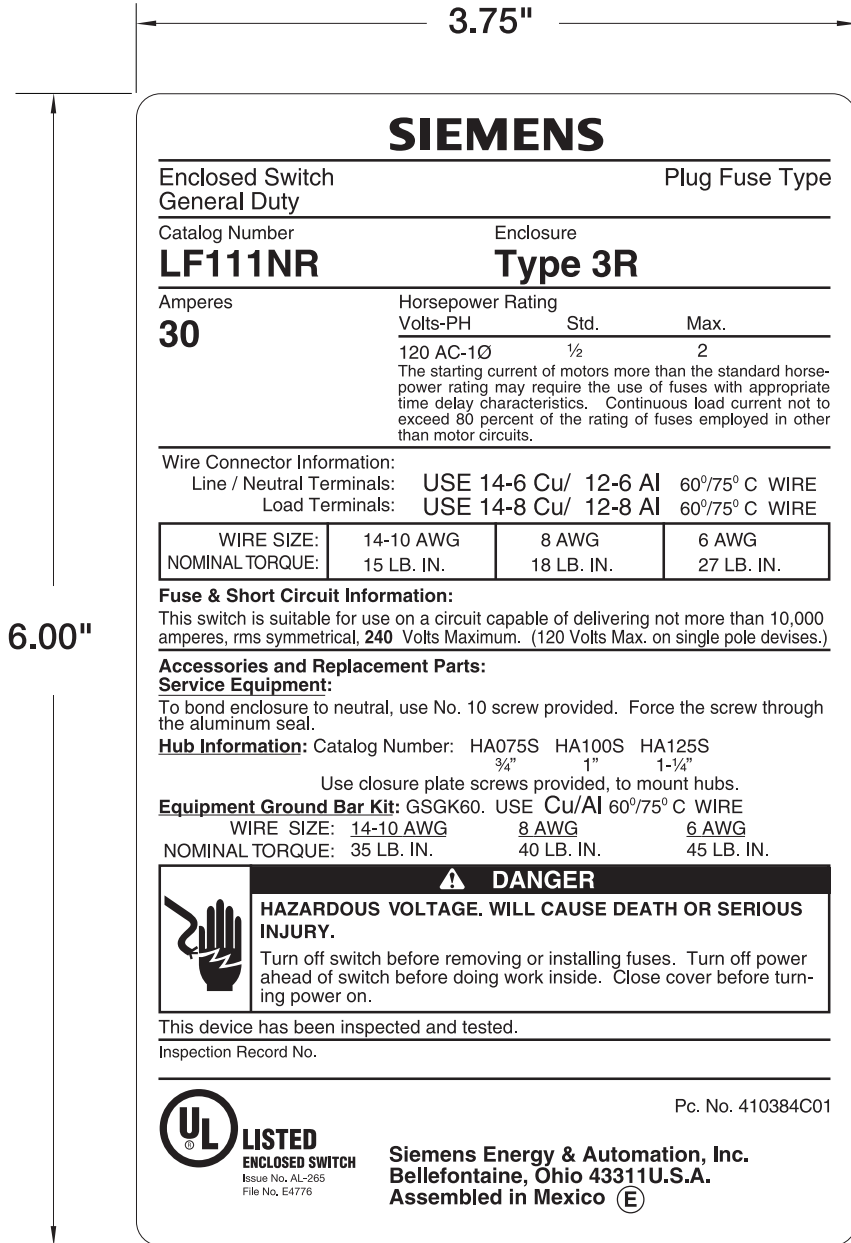

.125" RCR

- OK to print
  - OK to Print with corrections as marked
  - Make corrections, resubmit corrected proof
- Job will not be printed unless approved by customer.

Artwork By:	Date:	AUTHORIZED BY	DATE	PART NUMBER	REV
Proofer:	Date:		08/03/04	410384C01	