

# SIEMENS

## Rainproof Meter Module

Catalog Number  
**WML33225RJ**

Enclosure  
**Type 3R**

**Ratings:** Main Bus Rating: 1200 Amps.  
208Y/120 Volts AC, 3 Phase, 4 Wire  
240/120 Volts AC, 3 Phase, 4 Wire Delta  
See adjacent label for Short Circuit  
Current Rating.

**Meter Socket Rating:** 200 Amps.  
Continuous

**Branch Rating:** 225 Amps Max. See  
Breaker Ratings.

**Note:** When this meter module is used  
on a 240/120 Volts AC, 3 Phase, 4 Wire  
Delta system, the B Phase will be the  
high leg.

**Suitable For Use As Service  
Equipment** when used in combination  
with Siemens Modular Terminal Box  
Series WMTB, WTB, WET, or Murray Tap  
Box Series DTB\_W and no more than six  
main disconnecting means are provided.

For installation by a qualified person, in  
accordance with all local electrical codes  
and/or the National Electrical Code®.

**Terminals:  
Use Copper or Aluminum Wire**  
at all panel terminals. Suitable for 60°/75°C  
Conductors.


To connect breaker to bus, use the 1/4-20 x  
5/8" hex bolts provided with the enclosure.  
Torque to 60 lb.-ins. For breaker wiring  
terminals, see breaker markings for wire size  
and torque requirements.

Neutral Terminal:  
Wire Size #4-300 kcmil, Torque to 250 lb.-ins.

Ground Terminal:  
Wire Size #4-2/0 AWG, Torque to 50 lb.-ins.

**General Information:** See enclosed instruction sheet for information on mounting units.

Circuit breaker overload trip position is indicated by handle position midway between  
ON and OFF. To reset, move handle to OFF position then turn ON.

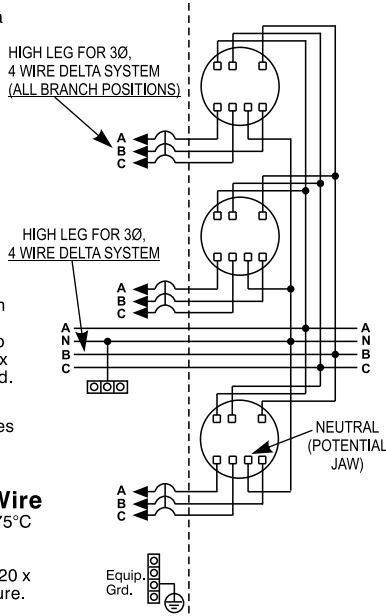

Siemens Industry, Inc. Norcross, Georgia U.S.A. **DH1** 40900123 0101 Rev.00

© The National Electrical Code is a registered trademark of the National Fire Protection Association.  
© 2017 Copyright Siemens Industry, Inc.

# SIEMENS

**Short Circuit Current Rating:** (Wattour meter not included in short circuit current rating).  
This panelboard has a maximum short circuit current rating of 100,000 Amps RMS  
symmetrical, 120/240 V~ maximum. The actual rating is dependent on the branch breakers  
installed in this panelboard and the main disconnect, if any, installed ahead of this panelboard.  
The correct branch breakers and main/branch breaker series combinations to be used for  
various short circuit current levels are listed in the tabulation below. Any circuit breaker  
installed, replaced, or added in this panelboard must be manufactured by Siemens and must  
be of the correct Type as indicated in the tabulation below.

MAIN DISCONNECT	BRANCH BREAKER	Then the maximum short circuit current rating in RMS symmetrical Amperes 240 V~ maximum is
When the main protecting the system is a	And the branch breakers installed are Siemens type	
None Used	QJ2, QR2	10,000
None Used	QJH2, QRH2	22,000
None Used	QJ2H	42,000
None Used	HQJ2, HQR2	
Siemens Breaker Types JXD2(-A), JD6(-A), JXD6(-A), LD6(-A), LXD6(-A)	QJH2, QJ2H	
Siemens Breaker Types JXD2(-A), JD6(-A), JXD6(-A), NJGA, NJJA, LD6(-A), LXD6(-A), NLGA, NLGB, MD6, MXD6, NMG, ND6, NXD6, NNG, PD6, PXD6, NPG, RD6, RXD6	QR2, QRH2	65,000
None Used	HQJ2H, HQR2H (200A max)	
Siemens Breaker Types HJD6(-A), HJXD6(-A), HJGA, HLD6(-A), HLXD6(-A), HLG, HLG, HMD6, HMXD6, HMG, HND6, HNXD6, HNG, HPD6, HPXD6, HPG, HRD6, HRXD6 or Class J, R, T or L fuses	QR2 (200A max) QRH2 (200A max) HQR2 (200A max)	100,000

**Warning:** This equipment has been designed for use only with circuit breakers listed above.  
Use of other circuit breakers in this equipment could result in personal injury or property  
damage and will void the warranty.

**Important:** Do not allow petroleum based (hydrocarbon) sprays, chemicals, solvents or  
any paint to contact interior components. Petroleum based chemicals can cause  
degradation of electrical insulating materials.

**Connect Modules Using:** **Cat. No.** **Torque**  
Quick Connect™ QC4 400-440 lb-in (35-36 ft.-lb.)

### **IMPORTANT - for use with:**

**Module . . . . . Siemens Series#**  
Main Breakers . . . . . (W)MC, WB, WEB, WXB, BFT  
Switches . . . . . WMP, WMS, WS, WES, WXS  
Tap/Terminal Boxes . . . . . WMTB, WTB, WET, WT\_PU, WTBN, WBT  
Pull Boxes . . . . . WMMB  
Meter Module . . . . . (W)MM, WxMM, (W)MT, (W)ML, (W)MK, (W)MLZ(F)  
Meter Combinations . . . . . WC, WCL, WCT  
Extension Box . . . . . WMEX, WSP, WSPD  
Bussed Elbow . . . . . BE, WELB

Siemens Industry, Inc. Norcross, Georgia U.S.A. **DH1** 40900123 0201 Rev.00

© 2017 Copyright Siemens Industry, Inc.