

MOUNTING CHANNEL DETAIL

IF HUB IS REQUIRED THE CATALOG NOS. LISTED BELOW MAY BE USED

3"....S56856-2
3-1/2"....S56857-2
4"....S56858-2
Cover Plate....S56933

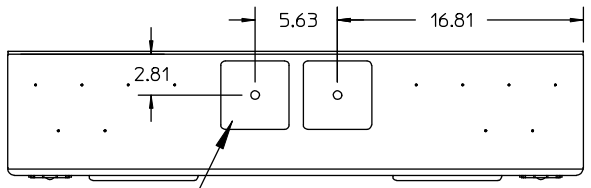

REMOVABLE HUB PLATE COVERING GASKETLESS HD TYPE HUB OPENING (INTERIOR RETAINING CHANNEL TYPE FOR MAX 4" CONDUIT) (2) PLACES

METER SOCKET COVER	NO. OF JAWS	FACTORY INSTALLED BYPASS	120/240VAC, 1ø 3 WIRE OR 208Y/240VAC, 1ø 3 WIRE (5TH JAW REQUIRED)										BRANCH LUG WIRE SIZES (AWG-KCMIL)		
			MAIN BUS RATING	BRANCH RATING	NO. OF POSITIONS	CATALOG NUMBER	DIMENSION "A"	DIMENSION "B"	SEMI-FLUSH MOUNTING KIT NO.	EUSERC STUD KIT	LINE LUG WIRE SIZES (AWG/KCMIL) PHASE AND NEUTRAL	LINE LUG WIRE SIZES (AWG/KCMIL) GROUNDING ELECTRODE	PHASE	NEUTRAL & SERVICE GROUND	EQUIPMENT GROUNDING
RING-TYPE	4	NONE	400A	125A	5	SP4511	38.43"	14"	SP4561FK		(1) 1/0 - 750 Cu-Al OR (2) 1/0 - 250 Al OR (2) 1/0 - 3/0 Cu	#6 - 250	SEE CIRCUIT BREAKER WIRE SIZE	#12 - 2/0	#12 - 2/0
RINGLESS	5	NONE	400A	125A	5	SP4511RJ	38.43"	14"							
RINGLESS	5	HORN	400A	125A	5	SP4511RJB	38.43"	14"							
RING-TYPE	4	NONE	400A	125A	6	SP4611	38.43"	14"							
RINGLESS	5	NONE	400A	125A	6	SP4611RJ	38.43"	14"							
RINGLESS	5	HORN	400A	125A	6	SP4611RJB	38.43"	14"							



RINGLESS STYLE METER SOCKET COVER WITH BARREL LOCK PROVISIONS (SUPPLIED WITH STAINLESS STEEL LATCH & HASP WITH PROVISIONS FOR PADLOCKING)



RING STYLE METER SOCKET COVER (INCLUDES ALUMINUM SNAP SEALING RING)



TOP LEFT POSITION OMITTED ON 5 GANG

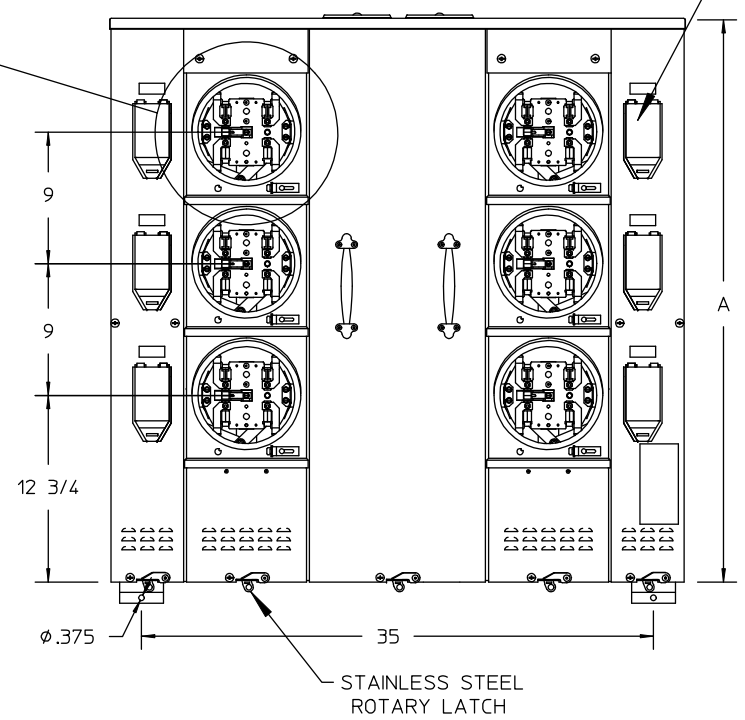

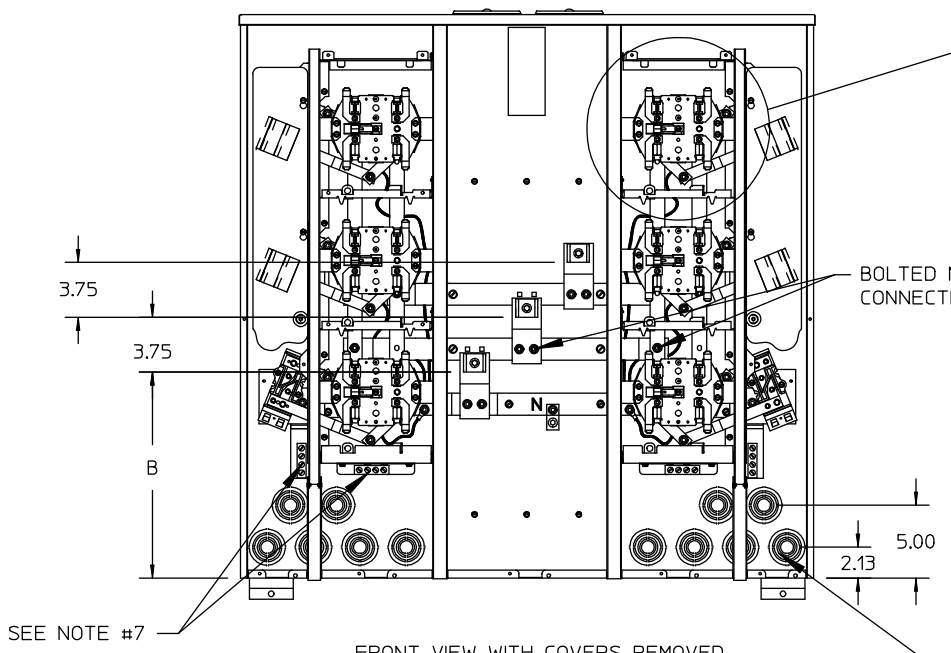

FRONT VIEW WITH COVERS REMOVED



SP4_11RJB METER POSITION



SP4_11RJ METER POSITION



SP4_11 METER POSITION

2.5", 2", 1.5", 1.25", 1", .75", & .50" KO (12) PLACES

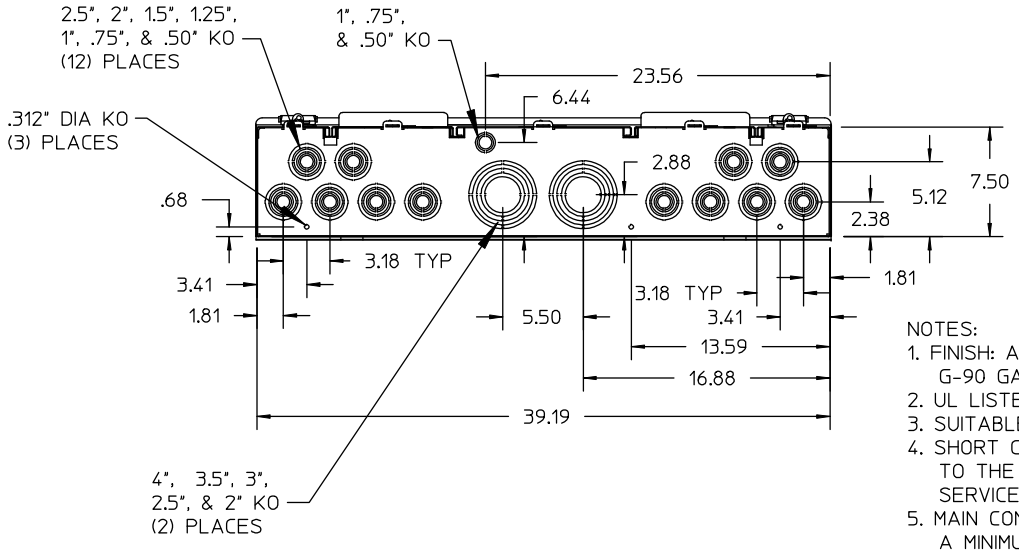

NOTES:
1. FINISH: ANSI 61 GRAY BAKED POWDER COAT PAINT OVER G-90 GALVANIZED, PHOSPHATIZED STEEL
2. UL LISTED - FILE E10703
3. SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT
4. SHORT CIRCUIT CURRENT RATING OF METER CENTER IS EQUAL TO THE RATING OF THE LOWEST INSTALLED TENANT SERVICE DISCONNECT.
5. MAIN CONNECTION POINTS RIGIDLY BOLTED WITH BOLT THAT HAS A MINIMUM MAJOR DIAMETER EQUAL TO OR GREATER THAN BUS THICKNESS WITH A CONICAL/SPRING WASHER AND HEX NUT.
6. 5TH JAW IS FACTORY INSTALLED ON RINGLESS ENCLOSURES
7. ON 5 GANG UNITS, CONNECTORS ON LEFT SIDE ARE 3 POSITION.

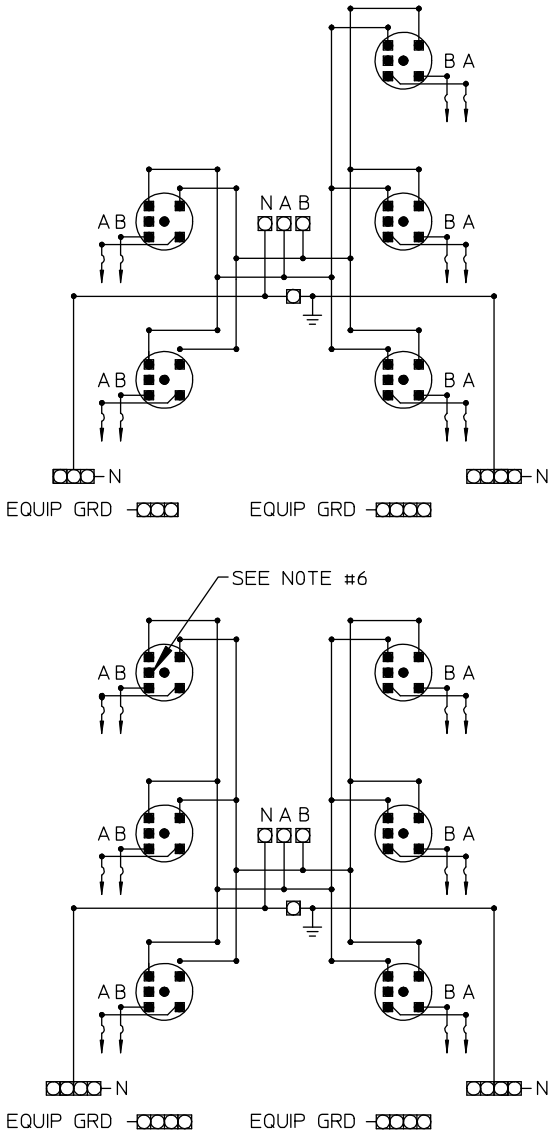

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES:
.XX
.XXX
HOLE DIAMETER
ANGULAR
UNDIMENSIONED 90° ANGLES

-CONFIDENTIAL-PROPERTY OF
Siemens Energy & Automation, Inc.
Residential Products Division

UNI-PAK/ALL-IN-ONE METERING EQUIPMENT
NEMA TYPE 3R ENCLOSURE
400A MAXIMUM TENANT CIRCUIT BREAKERS

DWN	BDD	DATE 3-12-2003	SIZE B	ISSUE RELEASE NO.	DWG NO. SP4X11-6	REV A
CHK	AGP	DATE 3-7-2003	SCALE	DO NOT SCALE DRAWING	SHEET 1 OF 1	
APVD		DATE				