



### 3C5Y030D16 - Three-Phase Ventilated-USA-DOE


| PRODUCT DETAILS   |                              |                         |                    |
|---|------------------------------|-------------------------|--------------------|
| <b>KVA:</b>   | 30.00                        | <b>Enclosure:</b>       | NEMA 3R Ventilated |
| <b>UPC#:</b>  | 804766143663                 | <b>Phase:</b>           | Three-Phase        |
| <b>Line Voltage</b>   | 240V-Delta                   | <b>Load Voltage</b>     | 480Y/277V          |
| <b>E/S Shielded:</b>  | No                           | <b>Windings:</b>        | Aluminum           |
| <b>Temp. rise:</b>  | 150°                         | <b>Hertz:</b>           | 60 Hz              |
| <b>Taps:</b>  | 2 - 2.5% FCAN; 4 - 2.5% FCBN | <b>Approvals:</b>       | UL, cUL, DOE       |
|   |                              | <b>Wall Bracket:</b>    | TWB75J             |
| WEIGHT AND DIMENSIONS   |                              |                         |                    |
| <b>Height(A):</b>   | 25.00"                       | <b>Width(B):</b>        | 22.00"             |
| <b>Depth(C):</b>  | 22.00"                       | <b>Shipping Weight:</b> | 330 lbs            |
| ADDITIONAL INFORMATION  |                              |                         |                    |
| <b>How to Buy:</b> Contact Siemens Distributor, Siemens Sales Rep or Configure in COMPAS Configuration Tool |                              |                         |                    |

#### Wiring Diagram

#### T240D Wiring Diagram & Connections\*

##### Wiring Diagram

Primary: 240 Volts Delta  
Secondary: 480Y/277 Volts

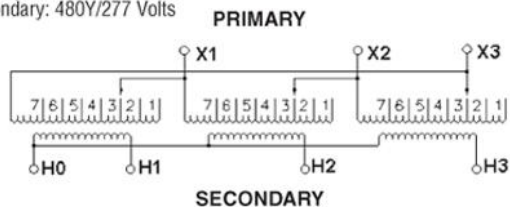

| Connections   |                               |                          |
|---------------|-------------------------------|--------------------------|
| Primary Volts | On Each Coil Jumper Taps To   | Primary Lines Connect To |
| 252           | 1                             | X1, X2, X3               |
| 246           | 2                             | X1, X2, X3               |
| 240           | 3                             | X1, X2, X3               |
| 234           | 4                             | X1, X2, X3               |
| 228           | 5                             | X1, X2, X3               |
| 222           | 6                             | X1, X2, X3               |
| 216           | 7                             | X1, X2, X3               |
| Sec. Volts    | Secondary Lines Connect To    |                          |
| 480           | H1, H2, H3                    |                          |
| 277           | Between H0 and H1 or H2 or H3 |                          |
| 1 Phase       |                               |                          |

#### Dimensional Drawing

Figure 24

