


IF IN DOUBT ASK  
DO NOT SCALE

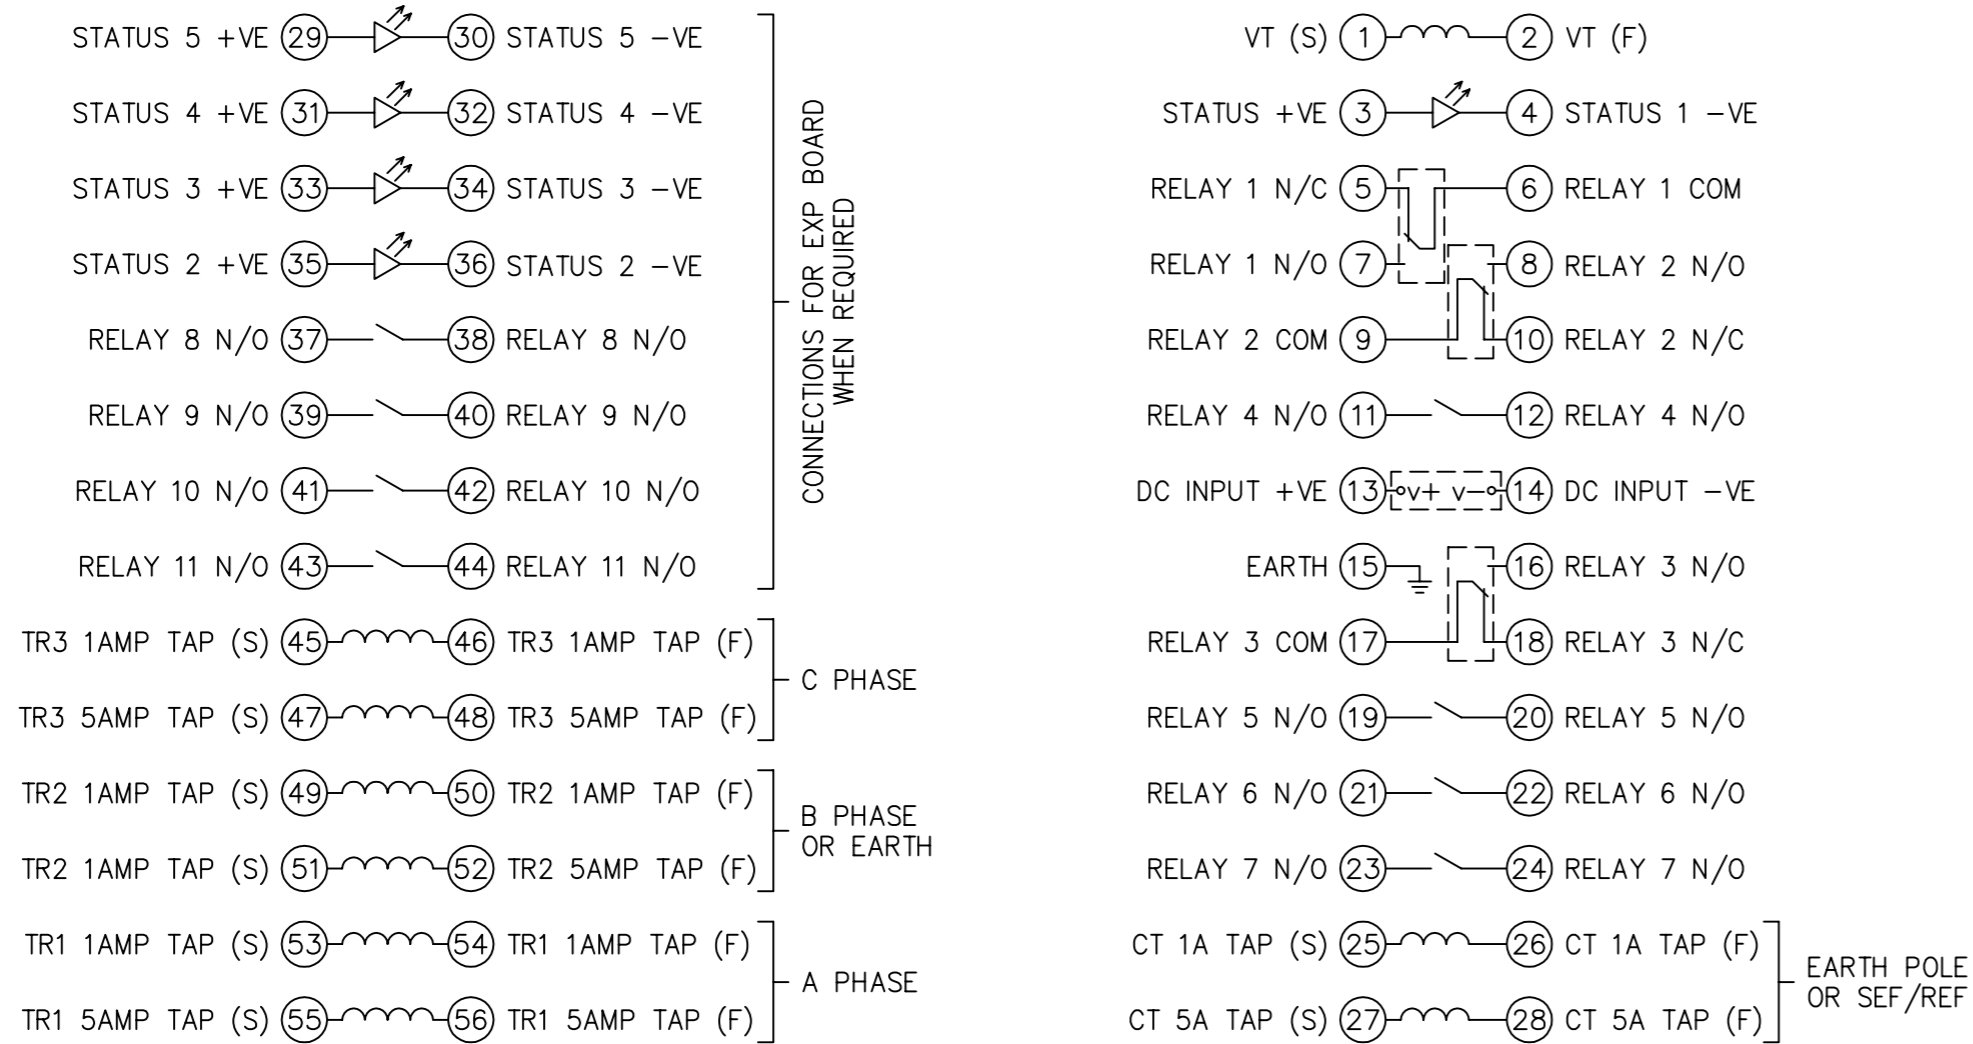

CONNECTIONS FOR EXP BOARD  
WHEN REQUIRED

C PHASE

B PHASE  
OR EARTH

A PHASE

OUTER TERMINAL BLOCK ASSY: -  
VIEW BLOCK FROM THE INSIDE FACE

ASSEMBLY INSTRUCTIONS: -  
TYPICAL ASSEMBLY DRAWING 2995G10029  
AT INDICATED POSITIONS FIT AS FOLLOWS,  
S - FIT STANDARD CONTACT  
2995B10051  
HC - FIT 'HEAVY CURRENT' KIT  
2995G10030  
WHERE IS SHOWN FIT CT SHORTING KIT  
2995G10031  
POSITIONS SHOWN BLANK ARE UNUSED  
ALL POSITIONS FIT SCREW 2106F12506

30	S	S	29
32	S	S	31
34	S	S	33
36	S	S	35
38	S	S	37
40	S	S	39
42	S	S	41
44	S	S	43
46	-o-o-	45	
48	-o-o-	47	
50	-o-o-	49	
52	-o-o-	51	
54	-o-o-	53	
56	-o-o-	55	

OUTER TERMINAL BLOCK ASSY: -  
VIEW BLOCK FROM THE INSIDE FACE

ASSEMBLY INSTRUCTIONS: -  
TYPICAL ASSEMBLY DRAWING 2995G10029  
AT INDICATED POSITIONS FIT AS FOLLOWS,  
S - FIT STANDARD CONTACT  
2995B10051  
HC - FIT 'HEAVY CURRENT' KIT  
2995G10030  
WHERE IS SHOWN FIT CT SHORTING KIT  
2995G10031  
POSITIONS SHOWN BLANK ARE UNUSED  
ALL POSITIONS FIT SCREW 2106F12506

2	S	S	1
4	S	S	3
6	-o-o-	5	
8	S	S	7
10	-o-o-	9	
12	S	S	11
14	S	S	13
16	S	S	15
18	-o-o-	17	
20	S	S	19
22	S	S	21
24	S	S	23
26	-o-o-	25	
28	-o-o-	27	

CHASSIS TERMINAL BLOCK ASSY: -  
VIEW FROM NUMBERED SIDE OF BLOCK


ASSEMBLY INSTRUCTIONS: -  
TYPICAL ASSEMBLY DRAWING 2995G10032  
AT INDICATED POSITIONS FIT AS FOLLOWS,  
T - FIT TRIP ISOLATION CONTACT  
2995B10053  
S - FIT STANDARD CONTACT  
2995B10054  
POSITIONS SHOWN BLANK ARE UNUSED

2	T	T	1
4	T	T	3
6	T	T	5
8	T	T	7
10	T	T	9
12	T	T	11
14	T	T	13
16	T	T	15
18	S	S	17
20	S	S	19
22	S	S	21
24	S	S	23
26	S	S	25
28	S	S	27

CHASSIS TERMINAL BLOCK ASSY: -  
VIEW FROM NUMBERED SIDE OF BLOCK

ASSEMBLY INSTRUCTIONS: -  
TYPICAL ASSEMBLY DRAWING 2995G10032  
AT INDICATED POSITIONS FIT AS FOLLOWS,  
T - FIT TRIP ISOLATION CONTACT  
2995B10053  
S - FIT STANDARD CONTACT  
2995B10054  
POSITIONS SHOWN BLANK ARE UNUSED

2	S	S	1
4	T	T	3
6	S	S	5
8	T	T	7
10	S	S	9
12	T	T	11
14	S	S	13
16	T	T	15
18	S	S	17
20	T	T	19
22	T	T	21
24	T	T	23
26	S	S	25
28	S	S	27

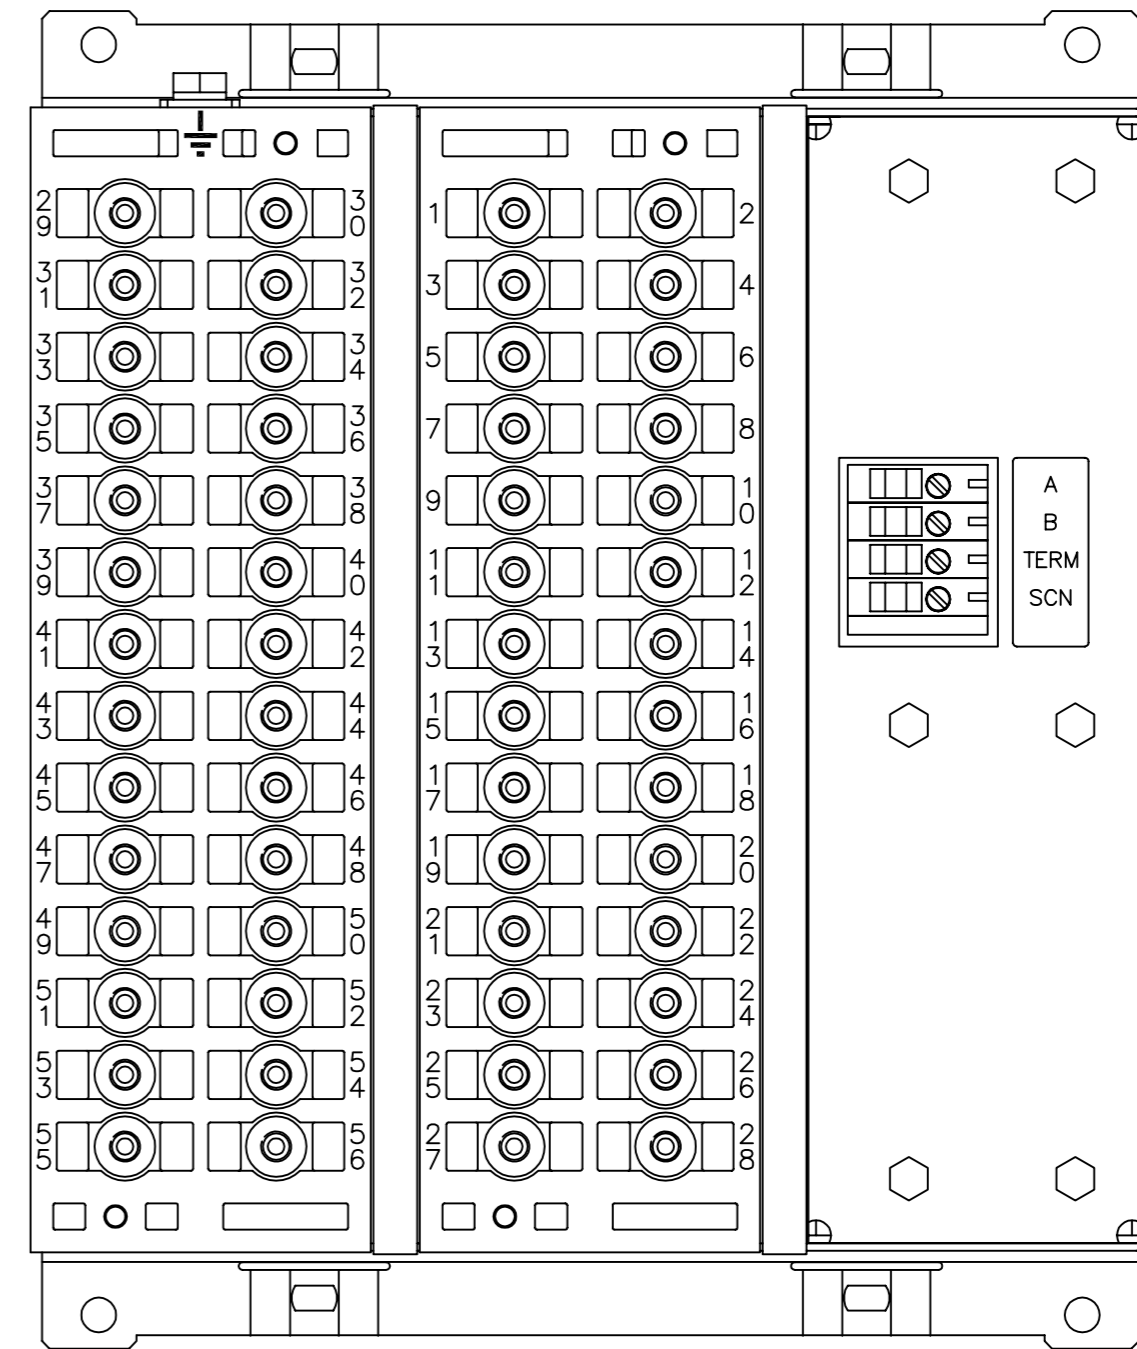

BOX VIEWED FROM REAR

NOTES:

- TERMINALS RECOMMENDED ARE PRE INSULATED & MUST BE CRIMPED USING APPROVED TOOLING.  
AMP PIDG OR PLASTI GRIP FUNNEL ENTRY (RING TONGUE) FOR M4 FIXING STUD.
- FOR OUTLINE & DRILLING DRG SEE 2995X10006 (A4).
- FOR TYPICAL CHASSIS ASSEMBLY SEE 2434H50005.  
FOR TYPICAL CASE ASSEMBLY : RS485 COMMS. - SEE 2434H50013.

SUPPLIER	AMP	CABLE SIZE
AMP	342103	0.25-1.6 SQ MM
AMP	342143	1.0-2.6 SQ MM.

OR ANY OTHER MANUFACTURERS EQUIVALENT TERMINAL.

PROTECTION TYPE	SCHEMATIC DIAGRAM VERSION A & B	SCHEMATIC DIAGRAM VERSION C
3 PHASE + EARTH	2434W10103 (A3)	2434W10104 (A3)
3 PHASE + SEF	2434W10105 (A3)	2434W10106 (A3)
2 PHASE + EARTH	2434W10107 (A3)	2434W10108 (A3)
3 PHASE	2434W10109 (A3)	2434W10110 (A3)
2 PHASE + SEF	2434W10111 (A3)	2434W10112 (A3)
2 PHASE + EARTH + SEF	2434W10113 (A3)	2434W10114 (A3)
2 PHASE + EARTH (DIR)	2434W10115 (A3)	2434W10116 (A3)
3 PHASE + EARTH (DIR)	2434W10117 (A3)	2434W10118 (A3)

NOT SUBJECT TO UPDATE  
ONCE COPIED / PRINTED  
OR DOWNLOADED

MATERIAL:

Dimensions in millimetres ; Surface texture in micrometres. Machine where marked ✓ For explanation of dimensions, tolerances, notes etc. see B.S.308. Limit on untoleranced unmachined dimensions ± _____ Limits on untoleranced machined dimensions to B.S.4500; i.e. up to 6±0.1; over 30 to 120±0.3; over 315±0.8; over 6 to 30±0.2; over 120 to 315±0.5; General unmachined angular tolerance ± _____	Finish:  Treatment:	Title: TERMINAL IDENTIFICATION & RELAY WIRING DIAGRAM 4 POLE ARGUS (E6 CASE) WITH RS485 COMMS	First used on: Similar Articles: 2434W50001 Supersedes:
DRAWN S KEEBLE   CHECKED RD.WATSON   APPROVED RD.WATSON		VATECH REYROLLE AUTOMATION, CONTROL & PROTECTION	Original Scale: 1 : 1 Drg. No. 2434W50008
DATE 10/09/04	IE	OPS   PCP   Purch.Spec.   TQ	EAC   CE   STD   A2

Copyright © 2004 VATECH REYROLLE ACP Ltd. Hebburn

1	12/08/04	CHANGE
ISSUE	DATE	NOTED