



CSA INTERNATIONAL

# Certificate of Compliance

Certificate Number: 203576

Project: 203576

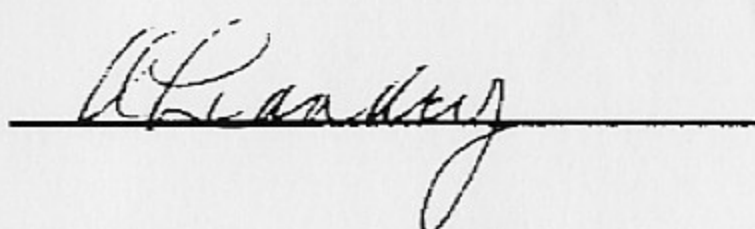
Date Issued: February 14, 2000

Issued to: Siemens AG  
A&D CD SV TQ2  
Werner-von-Siemens-Strasse 48  
92220 Amberg  
Germany

*The products listed below are eligible to bear the CSA Mark shown*



Issued by: Ann Landry  
Engineering Group Assistant

Signature: 

## PRODUCTS

CLASS 3211 05 - INDUSTRIAL CONTROL EQUIPMENT - Motor Controllers - Manual

AC cam-type controllers, open type, for flush mounting, single-pole or multipole, for change-over, reversing, speed-control and similar applications, with the following maximum ratings at 600 V ac, 3-phase, unless otherwise noted:

- Type 3LD21•: 25 A 600 V ac, 2 hp 120 V ac, 3 hp 240 V ac 1-phase, 7.5 hp 240 V ac, 10 hp 480 V ac, 15 hp 600 V ac 3-phase.
- Type 3LD22•: 32 A 600 V ac, 2 hp 120 V ac, 3 hp 240 V ac 1-phase, 10 hp 240 V ac, 20 hp 480 V ac, 20 hp 600 V ac 3-phase.
- Type 3LD25•: 63 A 600 V ac, 10 hp 240 V ac, 1-phase, 15 hp 20 V ac, 40 hp 480 V ac, 50 hp 600 V ac 3-phase.
- Type 3LD27•: 100 A 600 V ac, 30 hp 240 V ac, 60 hp 480 V ac, 75 hp 600 V ac 3-phase.
- Type 3LD28•: 125 A 600 V ac, 40 hp 240 V ac, 75 hp 480 V ac, 100 hp 600 V ac 3-phase.

The devices may be provided with the following options:

- Grounding terminal Cat No. 3LD92x followed by 40, 80 or 125 followed by E or V.
- Fourth Pole Cat No. 3LD92x followed by 40, 80 or 125 followed by E or V.
- Auxiliary Switch Block Cat No. 3LD92x followed by 01, 10 or 11 followed by 40, 80 or 125, rated A600, P600.

## Notes:

1. The devices are Certified for use in other equipment where the acceptability of the combination is to be determined by the Canadian Standards Association.
2. Types 3LD21, 3LD22, 3LD25, 3LD27 and 3LD28 are suitable for use as motor disconnect.
3. "•" type numbers are completed by additional numbers or letters for certified mechanical operators or mounting means.
4. "x" followed by a 2, 5 or 8 for the controller size.