


Heavy Duty Safety Switch

600A 600V, Type 4/4X

Data Sheet

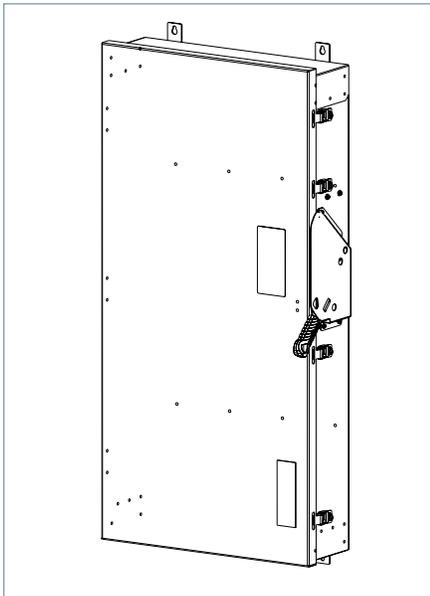

Standards and Ratings

- UL listed under file #E4776
- CSA listed under file #154852
- Meets NEMA Standard KS-1 for enclosed switches
- Meets NEC wire bending space requirements
- Rated 10,000 AIC with class H fuses or 200,000 AIC with Class R, T or J fuses
- I2t rated (Amps² x Seconds = 12,000,000)
- 12X overload current rating exceeds 10X industry standard
- Suitable for use as service entrance equipment

Features

- Quick-make and break switching action
- Visible blade design
- Highly visible ON/OFF indication
- Modular design allows quick and easy replacement of parts
- Defeatable dual cover interlock
- Compact one piece light weight construction enables easier installation
- Can utilize either one large or two small wires
- Spring loaded heat sink fuse clip
- One piece line and load base for consistent phase-to-phase alignment
- Extra ground lug on neutral
- Tangential knock out
- Lay in Lugs for easy wiring
- Window permits viewing of visible blade

Product Specifications

Heavy Duty 600A 600V, Type 4/4X

General Information

Catalog Number	Description	Shipping Weight
HNF366SA	Heavy Duty Non-Fused 3 Pole 600V 600A Type 4/4X, 304 Grade Stainless Steel	77
HNF366SSA	Heavy Duty Non-Fused 3 Pole 600V 600A Type 4/4X, 316 Grade Stainless Steel	77
HF366SA	Heavy Duty Fused 3 Pole 600V 600A Type 4/4X, 304 Grade Stainless Steel	98
HF366SSA	Heavy Duty Fused 3 Pole 600V 600A Type 4/4X, 316 Grade Stainless Steel	98
HFC366NSA	CSA Heavy Duty Fused 3 Pole 600V 600A Neutral Type 4/4X, Stainless Steel	99.6

Maximum Horsepower Ratings

Catalog Number	1 Phase, 240V AC	3 Phase, 240V AC	1 Phase, 480V AC	3 Phase, 480V AC	1 Phase, 600V AC	3 Phase, 600V AC	250V DC	600V DC
HNF366SA	—	200	—	400	—	500	50	50
HNF366SSA	—	200	—	400	—	500	50	50
HF366SA	—	200	—	400	—	500	50	50
HF366SSA	—	200	—	400	—	500	50	50
HFC366NSA	—	200	—	400	—	500	50	50

Accessories & Hub Kits

Catalog Number	Description
HA161234	Aux. Switch (1NO - 1NC)
HA261234	Aux. Switch (2NO - 2NC)
HA361234	Low Voltage Aux. SW. (1NO - 1NC)
HN656A	Neutral
HN678A	200% Neutral
HG656A	Ground Lug
HG2656A	Isolated Ground
HR66A	R Fuse (600A)
TFAK65A	T Fuse (600A, 600V)
HJ66A	J Fuse (600A, 240/600V)
HCU66A	Copper Lug (600A, fused)
HNCU66A	Copper Lug (600A, nonfused)
HCM66A	Field Replacement Kit (600A, fused)
HNCM66A	Field Replacement Kit (600A, nonfused)
SSH250	2.50" Hub Kit
SSH300	3.00" Hub Kit
SSH350	3.50" Hub Kit
HCU656A	Copper Lug Kit [Ⓞ]
SSH400	4.00" Hub Kit

Replacement Parts

Catalog Number	Description
HNB656A	"Line Base NonFused 400A and 600A"
HL656A	Lug Cap Kit (AL) 400-600A
HFB66A	Line Base 600A
HBB66A	Load Based Fused 600A
HL66A	Wire Grip AL Fused 600A
HM656A	Mechanism 400A-600A
HH656A	Handle/Handle Guard 400A-600A
Catalog Number + "DOOR"	Door


Mechanical Lug Wire Ranges

Description	Wire Range
Line, Load, & Main Neutral (NonFused)	(1) 1/0 AWG - 600 kcmil or (2) 1/0 AWG - 500 kcmil
Line, Load, & Main Neutral (Fusible)	(1) 1/0 AWG - 600 kcmil or (2) 1/0 AWG - 500 kcmil
100% Neutral	(2) 1/0 - 600 Kcmil or (2) 6 - 300 Kcmil
200% Neutral	(4) 1/0 - 600 Kcmil or (2) 6 - 300 Kcmil

[Ⓞ] Purchase field replacement kit along with lugs. (See Speedfax pg. 4-20)

Dimension Drawings


Heavy Duty 600A 600V, Type 4/4X (Fusible)

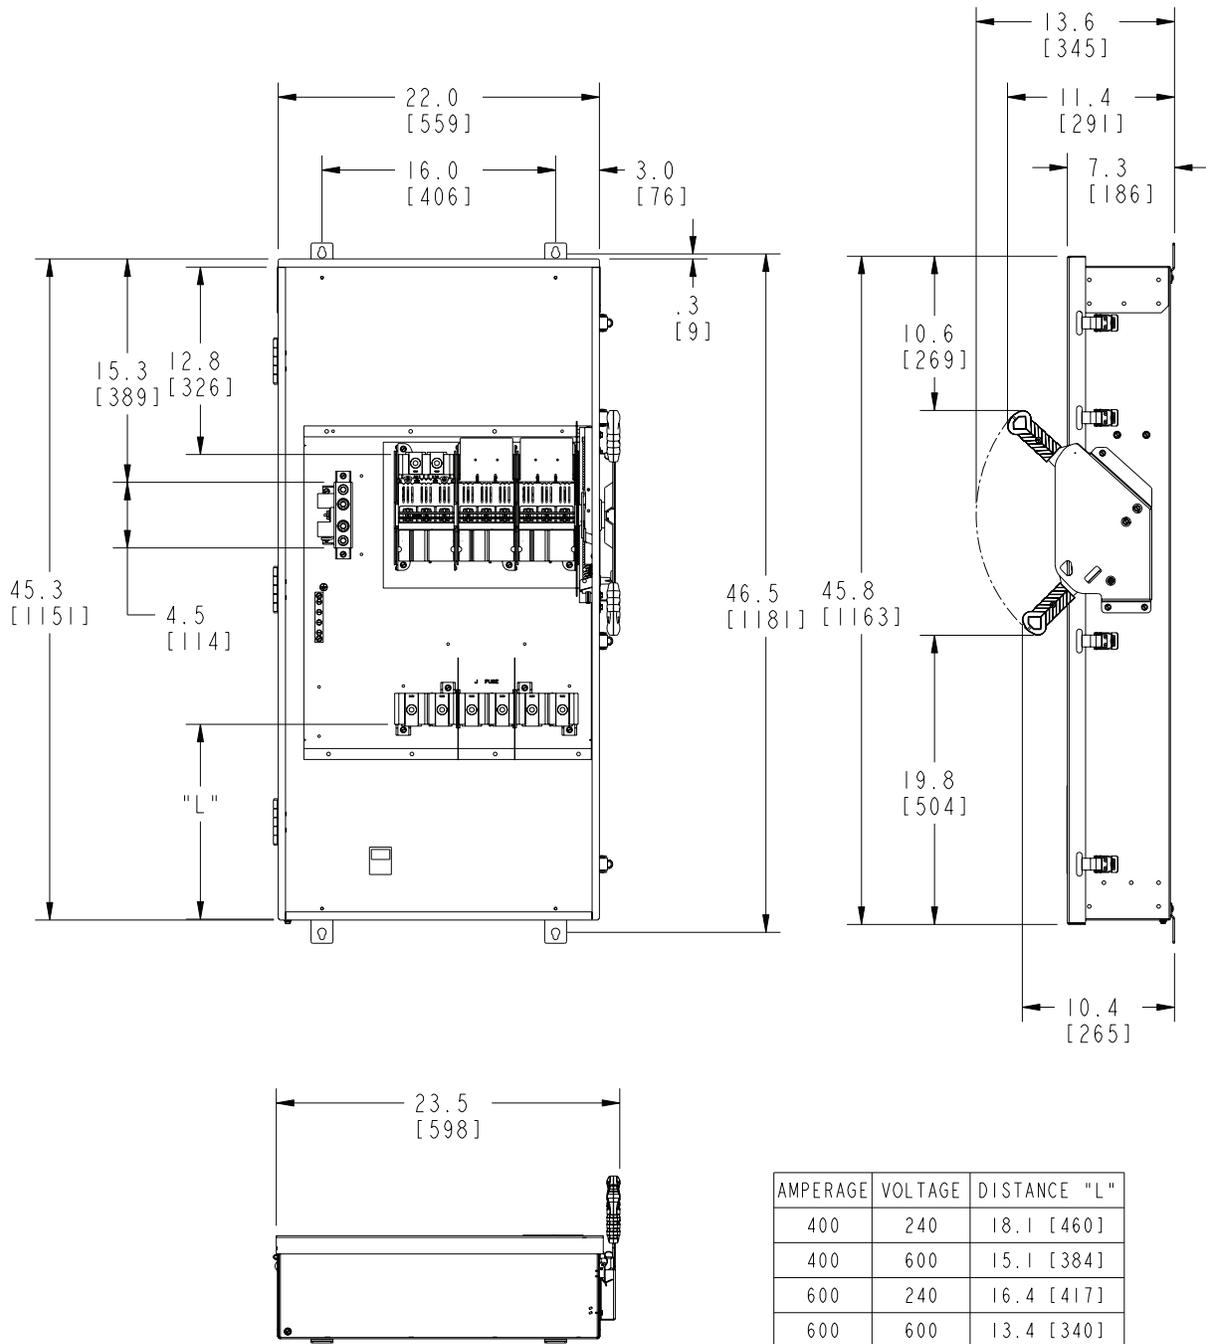

Dimensions shown in inches
and millimeters [].
Dimensions shown accurate to $\pm 1/8$ inch.

Enclosure:
304 Stainless Steel Type 4X
.060 thick (16 gauge)

Heavy Duty 600A 600V, Type 4/4X (Non-Fusible)

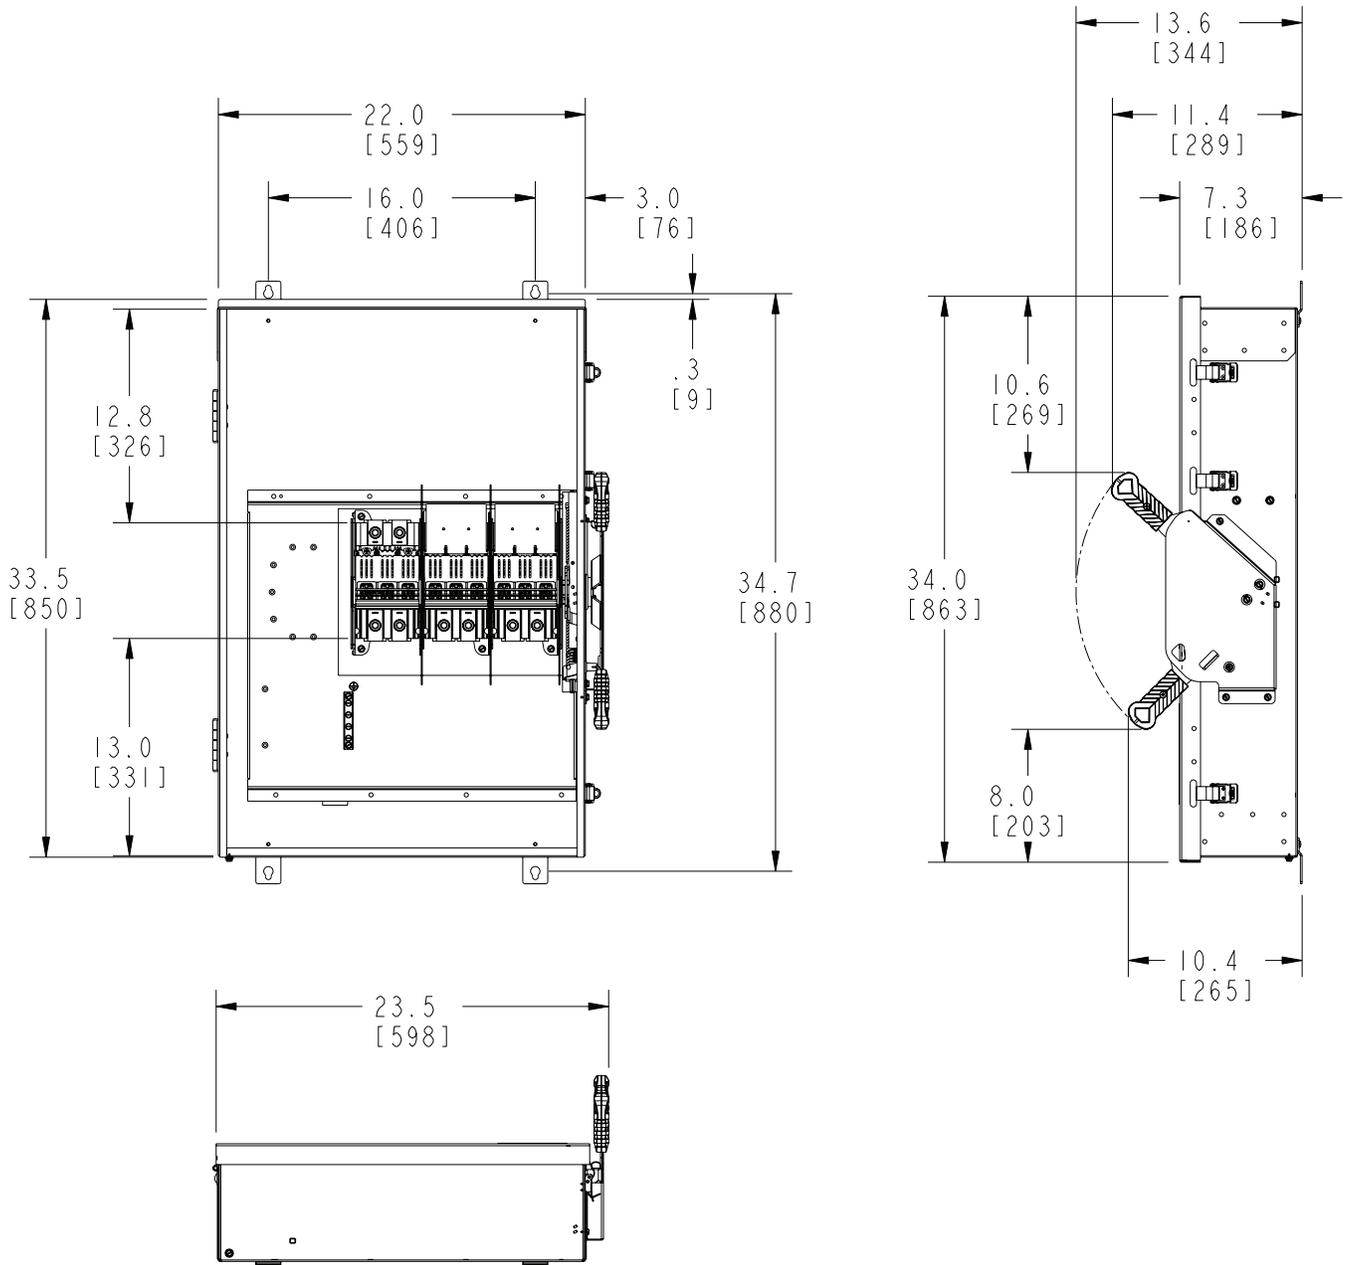

Dimensions shown in inches
and millimeters [].
Dimensions shown accurate to $\pm 1/8$ inch.

Enclosure:
304 Stainless Steel Type 4X
.060 thick (16 gauge)

Siemens Industry, Inc.
5400 Triangle Parkway
Norcross, GA 30092

1-800-241-4453
info.us@siemens.com

Order No. SSFL-H664X-0217 | Printed in USA |
© 2017, Siemens Industry, Inc.

www.usa.siemens.com/switches

The information provided in this flyer contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.