


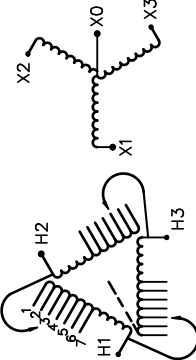

REVISION	DATE	BY	DATE	BY
			15/11/23	PP
1	DESIGN UPDATE	16/10/06	PP	VERIF'D

Confidential - Property of Siemens Industry, Inc.		
CUSTOMER		
ORDER NO.	DWG. NO.	1
	3F3Y015FCD16	SH 1 OF 2


SIEMENS

<p>CATALOG NO. 3F3Y015FCD16</p> <p>SERIAL NO.</p> <p>15 kVA 60 Hz 3 PHASE</p> <p>3.9 % IMP AT 135 °C</p> <p>115 °C RISE 30 °C AVG. AMBIENT</p> <p>220 °C TEMP CLASS 40 °C MAX. AMBIENT</p> <p>PRIMARY (H1 H2 H3) 480V V 10 kV BIL</p> <p>SECONDARY(X0 X1 X2 X3) 208Y/120V V 10 kV BIL</p> <p>WINDING MATERIAL CU</p> <p>ENCLOSURE TYPE 3R WEIGHT 215 LBS</p> <p>ENERGY EFFICIENCY EXCEEDS CSA DOE 10 CFR PART 431:2016</p> <p>C802.2-2012</p> <p>SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES</p>	<p style="text-align: center;">SERIES H</p> <p style="text-align: center;">3 PHASE</p>  <p style="text-align: center;">VOLTS CONNECT</p> <p style="text-align: center;">504 1</p> <p style="text-align: center;">492 2</p> <p style="text-align: center;">480 3</p> <p style="text-align: center;">468 4</p> <p style="text-align: center;">456 5</p> <p style="text-align: center;">444 6</p> <p style="text-align: center;">432 7</p>	<p style="text-align: center;">TYPE K</p> <div style="display: flex; justify-content: space-around;">   </div> <p style="text-align: center;">LISTED</p> <p style="text-align: center;">SEISMIC QUALIFICATIONS, FLOOR MOUNT ONLY</p> <p style="text-align: center;">OSP-0136-10 IBC 2012/ASCE 7-10</p> <p style="text-align: center;">SDS<=2.0g z/h=1 p=1.5</p> <p style="text-align: center;">NEMA Class ANN Dry Type Transformer</p> <p style="text-align: center;">Siemens Industry, Inc. Norcross, GA c8u0086e</p>
--	--	---




3F3Y015FCD16

FRONT VIEW

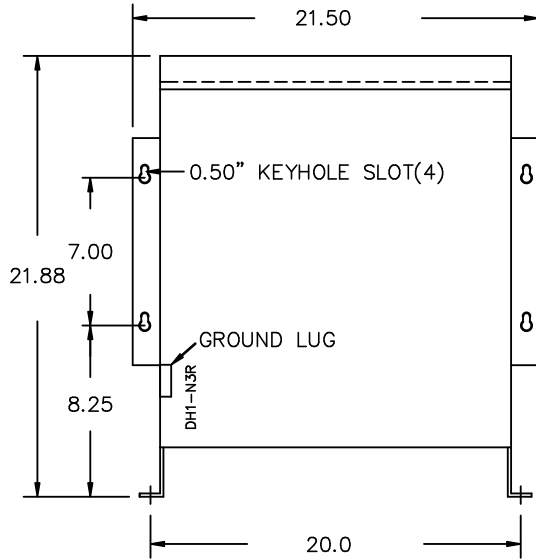

SIDE VIEW

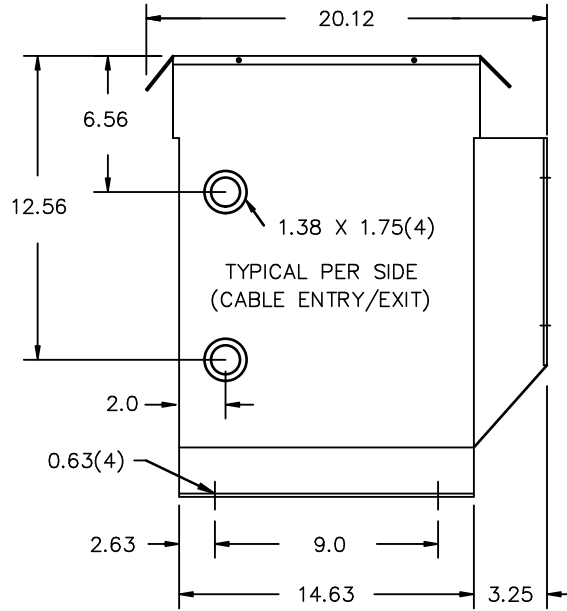

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT

Confidential - Property of
Siemens Industry, Inc.

REVISION	DATE	BY	DATE	BY
		DRAWN	15/11/23	PP
		CHEK'D		
1	DESIGN UPDATE	16/10/06	PP	VERIF'D

CUSTOMER		
ORDER NO.	DWG. NO.	1
	3F3Y015FCD16	SH 2 OF 2