

REVISION	DATE	BY	DATE	BY
		DRAWN	16/02/01	PP
		CHEK'D		
		VERIF'D		

Confidential - Property of Siemens Industry, Inc.		
CUSTOMER		
ORDER NO.	DWG. NO.	
	3F3Y015K13FESCD16	SH 1 OF 2

SIEMENS

CATALOG NO. 3F3Y015K13FESCD16
SERIAL NO. SERIES H
15 kVA 60 Hz 3 PHASE
4.1 % IMP AT 135 °C

115 °C RISE 30 °C AVG. AMBIENT
220 °C TEMP CLASS 40 °C MAX. AMBIENT


PRIMARY (H1 H2 H3) 480V V 10 kV BIL
SECONDARY(X0 X1 X2 X3) 208Y/120V V 10 kV BIL

WINDING MATERIAL CU
ENCLOSURE TYPE 3R WEIGHT 210 LBS
ENERGY EFFICIENCY EXCEEDS CSA DOE 10 CFR PART 431:2016
C802.2-2012

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE, PANEL AND
ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES
ELECTROSTATIC SHIELD

SUITABLE FOR NONSINUSOIDAL CURRENT LOAD WITH K-FACTOR NOT TO EXCEED K-13
SUITABLE FOR INDOOR OR OUTDOOR LOCATIONS
BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION MANUAL

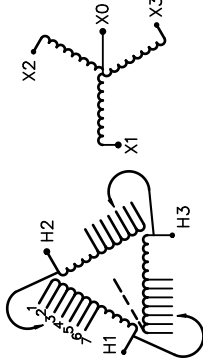

NEMA Class **ANN** Dry Type Transformer
Siemens Industry, Inc. Norcross, GA dsu0007e




VOLTS
504
492
480
468
456
444
432

CONNECT
1
2
3
4
5
6
7

TYPE K



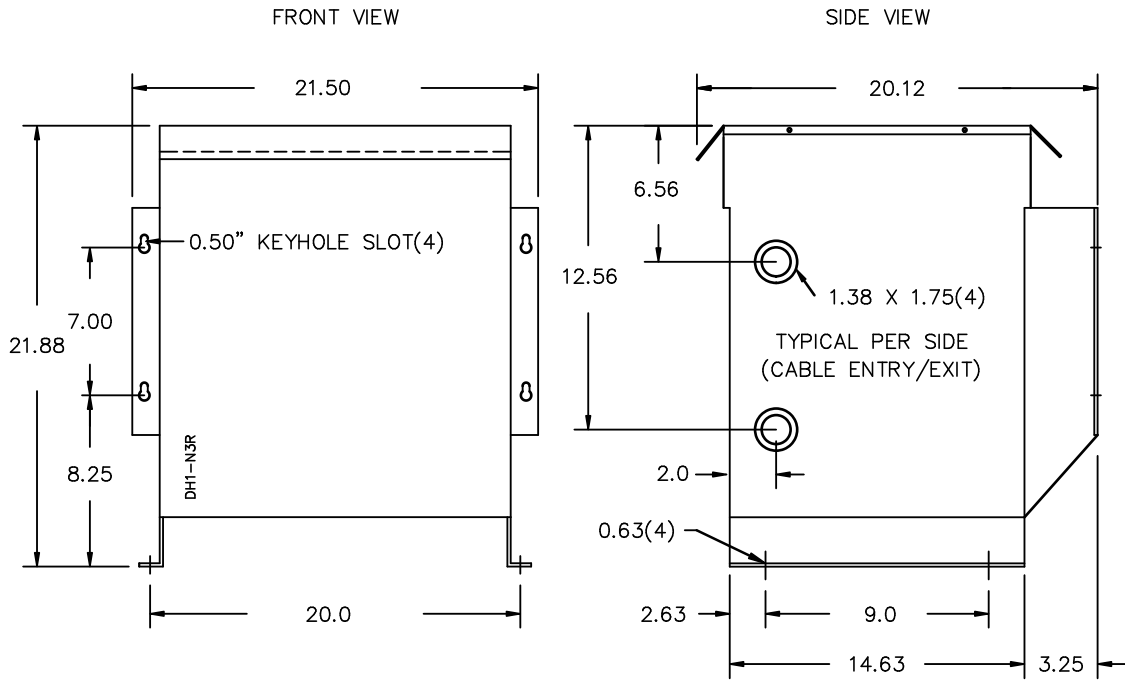

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT

Confidential - Property of
Siemens Industry, Inc.

REVISION	DATE	BY	DATE	BY	CUSTOMER
			DRAWN	16/02/01	PP
			CHEK'D		
			VERIF'D		
					ORDER NO.
					DWG. NO.
					3F3Y015K13FESCD16 SH 2 OF 2