

# SIEBREAK™ metal-enclosed switchgear

## Metal-enclosed, load-interrupter switchgear up to 1,200 A and 15 kV

### Description

Siemens type SIEBREAK™ load-interrupter switchgear is a modular assembly of switches, fuses, and bus assemblies that are fully integrated both mechanically and electrically to provide the highest level of medium-voltage circuit protection.

### Features and benefits:

- 5 kV and 15 kV voltage classes
- 600 A and 1,200 A continuous current
- Non-fused or fused
- Indoor type 1 enclosure
- Single, duplex, and selector switch types
- Large 8" x 18" (203 mm x 457 mm) viewing window
- Hinged, grounded metal barrier in front of switch blades
- 11-gauge doors, covers, and barriers
- Silver-plated copper bus

- Provisions for key interlocking
- Mechanical door and switch interlock
- Upper and lower ventilation louvers
- Glass-polyester bus supports
- Non-corrosive nameplate
- Space heater with thermostat (optional)
- NEMA CC1 hole patterns for cable termination.

### Standards

The equipment meets or exceeds applicable standards from ANSI, IEEE, CSA, EEMAC, and NEMA.

### Applications:

- Standalone bay
- Transformer primary
- Lineups.

### Standard outdoor features:

- Long-life space heaters (half-voltage)
- Bottom cover plate
- Externally removable filters
- 6" (152 mm) formed steel base.

### Optional:





- UL or C-UL Listing
- Explosion or current-limiting fuses
- Indoor type 2 drip-proof enclosure
- Indoor type 12 dust-resistant enclosure
- Outdoor non-walk-in type 3R enclosure
- Motor-operated mechanism
- High-track resistance bus supports
- Auxiliary switches (2 NO-2 NC)
- Mimic bus
- Ground studs
- Screens and filters (indoor)
- Tin-plated copper bus.

### Modular configurations to mount:

- Surge arresters
- Instrument transformers
- Control power transformers
- Power meters
- Other auxiliary equipment.

Switch ratings						
System design voltage	Impulse-withstand voltage	Continuous current	Momentary current (unfused) asymmetrical	Rated short-time (2 seconds) current symmetrical		
kV	kV BIL	A	rms kA	rms kA		
5.0	60	600	39	25		
5.0	60	600	59	38		
5.0	60	1,200	39	25		
5.0	60	1,200	59	38		
15.0	95	600	39	25		
15.0	95	600	59	38		
15.0	95	1,200	39	25		
15.0	95	1,200	59	38		
Standard configuration			Single	Duplex	Selector	Lineup
Types 1, 2, 12, and 3R enclosure			•	•	•	•
36" (914 mm) wide types 1, 2, 12, and 3R			•		•	
72" (1,829 mm) wide				•		
60" (1,524 mm) wide for front-access design			•			•
2.62" (67 mm) width transition to dry-type transformer for type 3R outdoor			•	•	•	
18" (457 mm) width transition to liquid-filled transformer			•	•	•	
92" (2,337 mm) height types 1 and 12 enclosures			•	•	•	•
105" (2,667 mm) height type 3R enclosure			•	•	•	•
99" (2,515 mm) height type 2 enclosure			•	•	•	•
62" (1,575 mm) depth standard types 1, 2, and 12 enclosure			•			•
72" (1,829 mm) depth for types 1, 2, and 12 (optional)				•	•	
72" (1,829 mm) depth for type 3R enclosure			•	•	•	•
56" (1,422 mm) depth for front-access design			•			•

Item	Description
A	600 A or 1,200 A interrupter switch
B	Fuses
C	600 A no-load selector switch
D	600 A interrupter switch

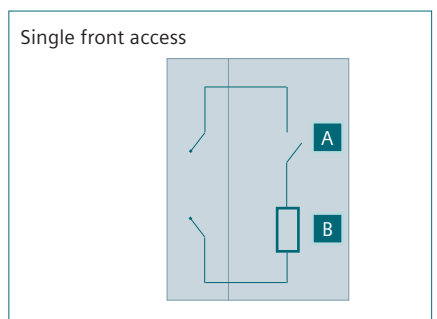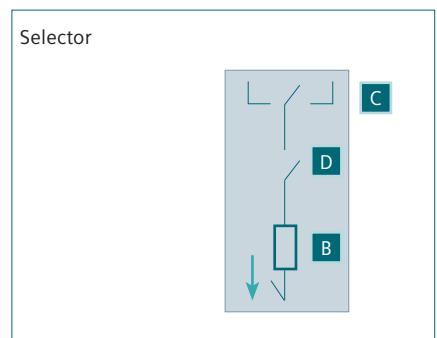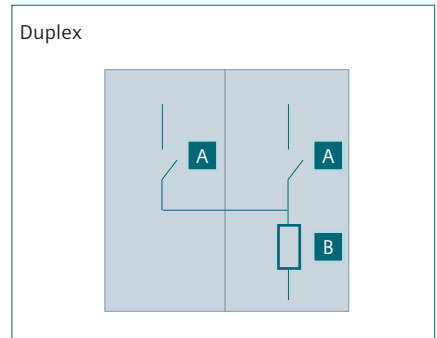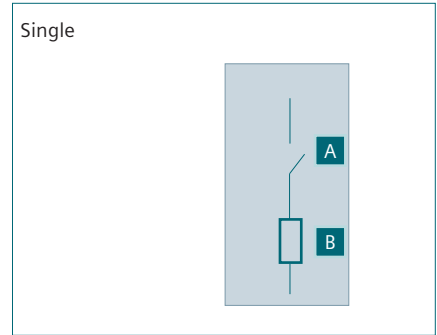

Published by Siemens Industry, Inc. 2017.

Siemens Industry  
7000 Siemens Road  
Wendell, North Carolina 27591

For more information, including service or parts, please contact our Customer Support Center. Phone: 1-800-347-6659

[www.usa.siemens.com/mediumvoltage](http://www.usa.siemens.com/mediumvoltage)

Article No. EMMS-B40045-01-4AUS

Printed in U.S.A.

© 2017 Siemens Industry, Inc.

The technical data presented in this document is based on an actual case or on as-designed parameters, and therefore should not be relied upon for any specific application and does not constitute a performance guarantee for any projects. Actual results are dependent on variable conditions. Accordingly, Siemens does not make representations, warranties, or assurances as to the accuracy, currency or completeness of the content contained herein. If requested, we will provide specific technical data or specifications with respect to any customer's particular applications. Our company is constantly involved in engineering and development. For that reason, we reserve the right to modify, at any time, the technology and product specifications contained herein.