

SIEMENS

Rainproof Combination Metering

Catalog number
MM0202B1150R

Enclosure
Type
3R

Panelboard Rating
200 Amps, Max
120/240 Volts A. C., 1 phase, 3 wire
208Y/120 Volts A. C., 1 phase, 3 wire
(Derived from 3 phase □ 4 wire system)


Meter Socket Rating
150 Amps Continuous

Suitable Only For Use As
Service Equipment

For Overhead or Underground
Service

Use 60/75° C Copper or Aluminum
Conductor in Terminals A, B, N1, N2
N3 and N4

Main Breaker Terminals
See markings on breaker for torque
requirements and conductor rating

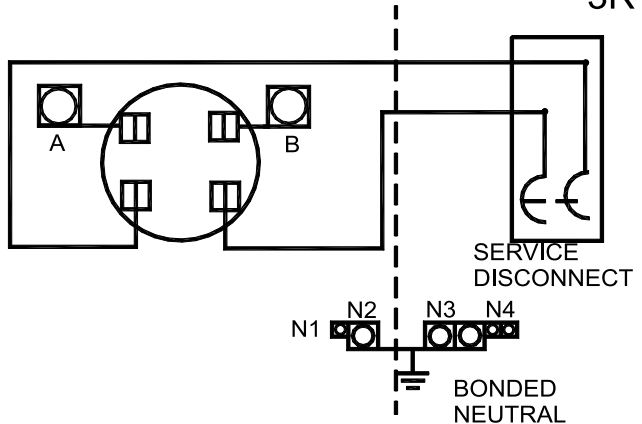

If hub is required, the catalog numbers listed below
may be used on this enclosure

| Trade size (in) | Catalog number |
|-----------------|----------------|
| 1 ¼" | S38597-2 |
| 1 ½" | S38598-2 |
| 2" | S38599-2 |
| 2 ½" | S38600-2 |

| Terminal | Wire Size | Torque |
|----------|----------------|-----------|
| A, B | 350 kcmil - #6 | 275 lb in |
| N1 | #2-#3 | 50 lb in |
| | #4-#6 | 45 lb in |
| | #8 | 40 lb in |
| | #10-#14 | 35 lb in |
| N2 | 250 kcmil - #6 | 275 lb in |
| N3 | 250 kcmil- #4 | 275 lb in |
| N4 | 1/0-#14 | 120 lb in |

General Information:

Circuit Breakers overload trip position is indicated by
handle position midway between ON and OFF. To reset,
move handle to OFF position then turn ON.

For installation in accordance with all local Electrical codes
and/or the National Electrical Code ●



E10703

Short Circuit Current Rating (Wattour Meter not included in short circuit rating)

This panelboard has a Siemens Type QNH or MD-HT (rated 22k AIC) circuit breaker installed and has a maximum short circuit rating of 22,000 RMS symmetrical amperes, 120/240 volts AC. The actual rating is equal to the lowest rating of any breaker installed. If the circuit breaker is replaced, use only Siemens Type QNH or MD-HT.

Siemens Industry, Inc.
Norcross, Georgia U.S.A.

Part No. 4099674 Rev C

Assembled in Mexico

Important

This equipment has been designed for use only with Siemens Type QNH or MD-HT Circuit Breakers. Use of other circuit breakers in this equipment will void the warranty. Do not spray or allow any petroleum based chemicals, solvents, or paint to contact interior components.

The National Electrical Code is a recognized trademark of NFPA.