## Catalog Number: MP0406B1200RB2

## Features and Ratings

- Unit Rating: 200A Max., 120/240VAC
- Meter Socket Rating: 200A Continuous
- Ringless Horn Bypass Socket
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire
- For Underground Service Only

## Accessories

**FILLER PLATE**
Cat No: ECQF3

**PAD MOUNT KIT**
Cat No: MPFLANGE2

**PEDESTAL EXTENSION**
Cat No: MPEXT2

## Connectors, Wire Sizes and Torques

| CONNECTOR | WIRE SIZE | TORQUE |
|---|---|---|
| A, B, N | #6 - #1 AWG | 75 LB. IN. |
| | 1/0 - 350 KCMIL | 275 LB. IN. |
| LARGE LOAD NEUTRAL N1 | #6 - 250 KCMIL | 275 LB.-IN. |
| SMALL LOAD NEUTRAL N2 | #14 - 1/0 AWG | 50 LB. IN. |
| GROUND G1 | #14 - 1/0 AWG | 50 LB. IN. |
| EQUIP GROUND G2 | #14 - 4 AWG | 50 LB. IN. |
| EQUIP GROUND G3 | #14 - 2 AWG | 50 LB. IN. |
| BRANCH BREAKER | SEE MARKINGS ON BREAKER | |

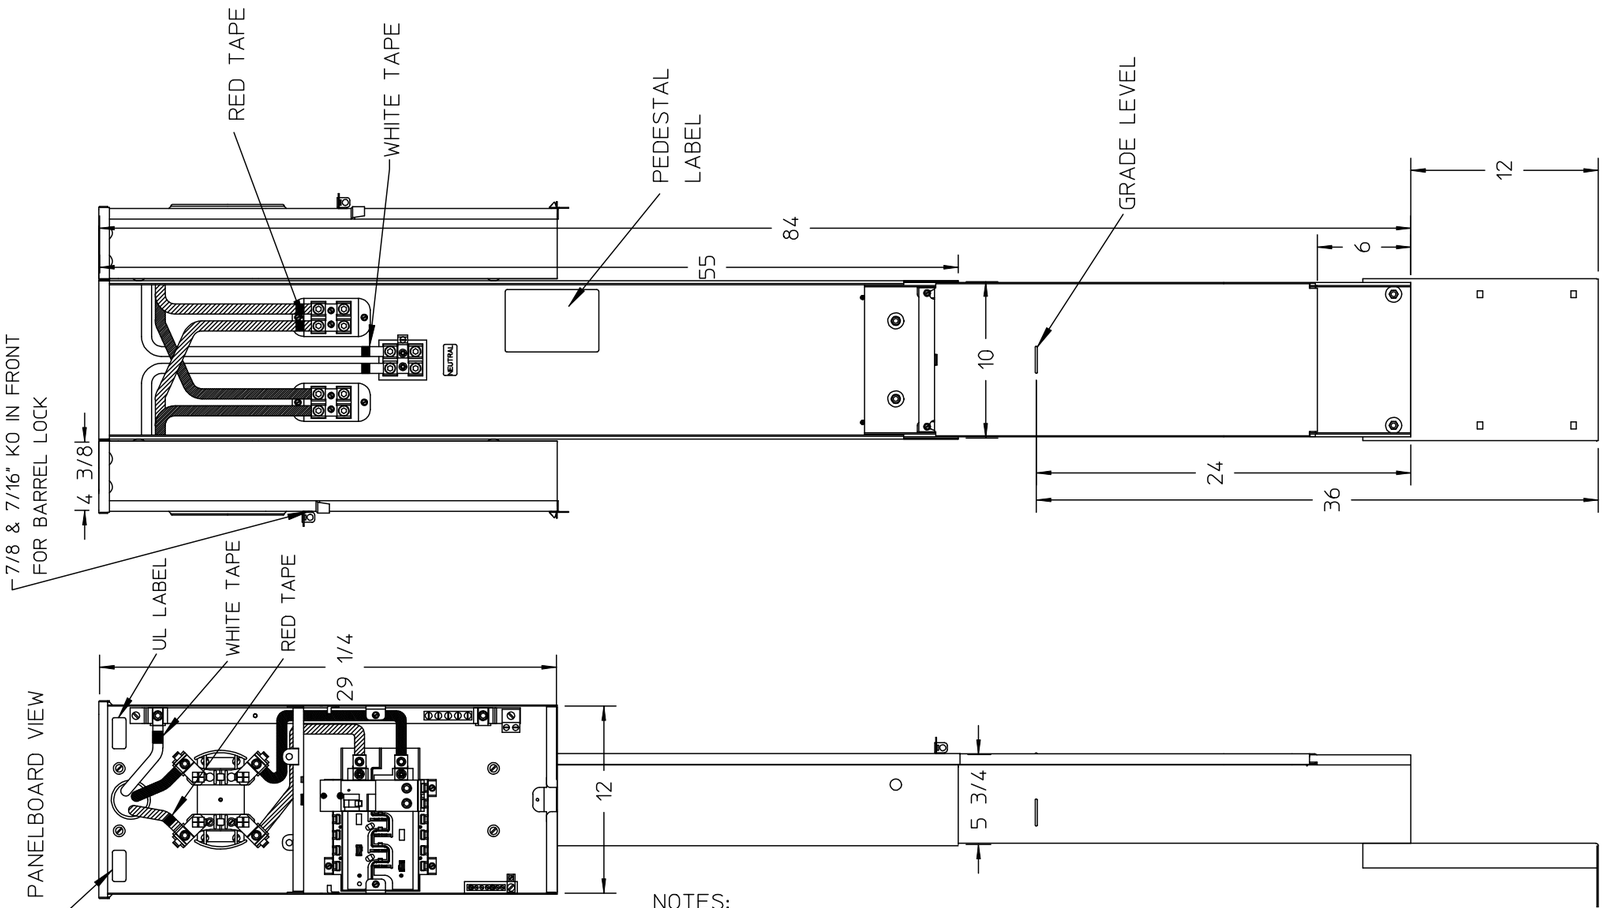


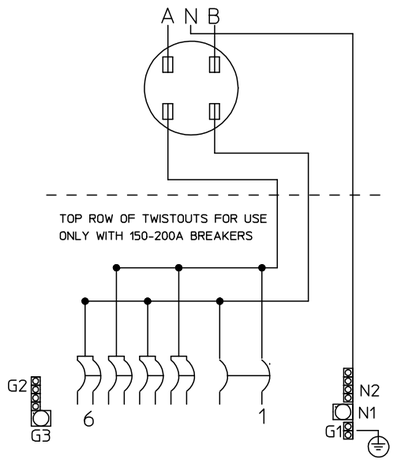


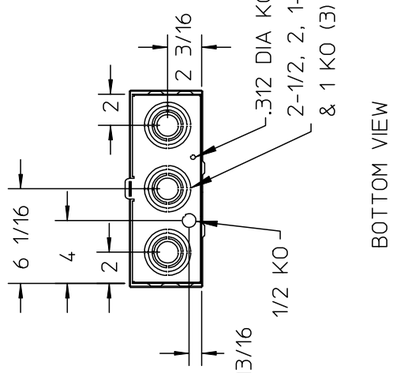


NOTES:
1. PEDESTAL IS FABRICATED FROM 14 GAUGE GALVANIZED STEEL
2. PANELBOARD ENCLOSURE IS FABRICATED FROM 16 GAUGE GALVANIZED STEEL
3. BREAKER COMPARTMENT COVER IS HINGED AT TOP AND LOCKS INTO OPEN POSITION
4. 120/240 VAC, 200 AMP, 1 PHASE, 3 WIRE. 200A BRANCH BREAKER FACTORY INSTALLED
5. LOAD TERMINALS ARE RATED FOR 60° C OR 75° C CONDUCTOR
6. SIEMENS ACCEPTABLE BREAKER TYPES:15-100A "QP" (2) 2-POLE OR UP TO (4) 1-POLE'
7. UNIT SHIPS AS ONE PIECE.

© 2015 Copyright Siemens Industry, Inc.

TALON

**MOBILE HOME PEDESTAL**

Description:

2 SKT/BKR/PED 200A 1P HORN

CH 6/16/15 | DO NOT SCALE DRAWING | Dwg No: MP0406B1200RB2