


2320W50009

TOP
LOOKING ON FRONT OF RELAY

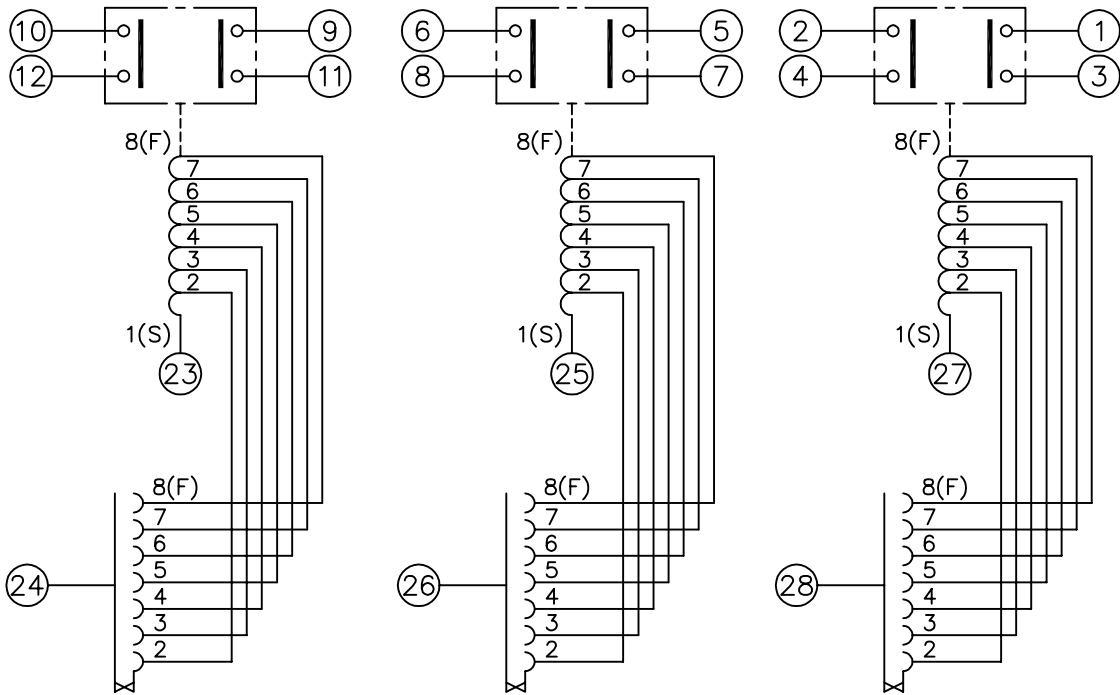

KEY

- make contact
- break contact
- c/o contact
- ext. conn
- plug bridge - shorting
- metering point
- 5Kv barrier
- test socket - shorting
- plug & socket

NOTE:

1. COIL AND PLUG BRIDGE WIRE IDENTITIES:
 1(S) = COIL START.
 8(F) = COIL FINISH.
 2 - 7 = COIL WINDING TAPS, 2 = 1st TAP, 3 = 2nd TAP ETC.

FOR INFORMATION ONLY
UNCONTROLLED COPY
NOT SUBJECT TO UPDATE

FRAME REFERENCE E6FS03

FRAME TERMINAL BLOCK ASSY: -

ASSEMBLY INSTRUCTIONS: -
 TYPICAL ASSEMBLY DRAWING 2995G10032.
 AT INDICATED POSITIONS FIT AS FOLLOWS,
 T - FIT TRIP ISOLATION CONTACT 2995B10053.
 S - FIT STANDARD CONTACT 2995B10054.
 SECURE CONTACTS USING FIXING SCREW
 2109F99009.
 POSITIONS SHOWN BLANK ARE UNUSED.

2	T	T	1
4	T	T	3
6	T	T	5
8	T	T	7
10	T	T	9
12	T	T	11
14			13
16			15
18			17
20			19
22			21
24	S	S	23
26	S	S	25
28	S	S	27

VIEW FROM NUMBERED
SIDE OF BLOCK

OUTER TERMINAL BLOCK ASSY: -

ASSEMBLY INSTRUCTIONS: -

TYPICAL ASSEMBLY DRAWING 2995G10029.
 AT INDICATED POSITIONS FIT AS FOLLOWS,
 S - FIT STANDARD CONTACT 2995B10051
 HC - FIT 'HEAVY CURRENT' KIT 2995G10030.
 WHERE IS SHOWN FIT CT SHORTING
 KIT 2995G10031
 POSITIONS SHOWN BLANK ARE UNUSED
 ALL POSITIONS FIT SCREW 2106F12506

2	S	S	1
4	S	S	3
6	S	S	5
8	S	S	7
10	S	S	9
12	S	S	11
14			13
16			15
18			17
20			19
22			21
24			23
26			25
28			27

VIEW FROM INSIDE
FACE

Copyright © 2000 VA TECH Reyrolle Ltd. Hebburn

			Title. T.B. AND WIRING DIAGRAM FOR B69 (3P) RELAY IN EPSILON E6 CASE.	First used on:	
				Similar Articles:	
				Supersedes:	
3 ROW 2	05/08/05 10/04/00	MN320/2725 MN995/09	VA TECH Reyrolle AUTOMATION, CONTROL & PROTECTION	Original Scale. .	Drg.No. 2320W50009
DRAWN: T.CARR	CHECKED:	APPROVED: R.D.WATSON	DATE: 19/07/02	IE:	OPS: