

6. End-user agreement

6.1 General notes

By purchasing the ACS110 or ACS111 operating software, you accept the conditions agreed upon between you (the user) and Siemens Building Technologies Landis & Staefa Division (L&S) in connection with the use of the software and the related documentation

L&S does not assume any liability for damage or loss resulting from the purchase or use of the software
If you have any questions in connection with the agreement, please get in touch with your contact person at L&S

6.2 Copy protection


The software package purchased by you may be installed and operated on any PC of the licenced company
The software may neither be modified, converted, decompiled or analysed. Also, other programs may not be derived from it

The software may not be let, lent or sold to thirds (company external users)

The documentation may be copied, but not modified

SIEMENS

Siemens Building Technologies
Landis & Staefa Division

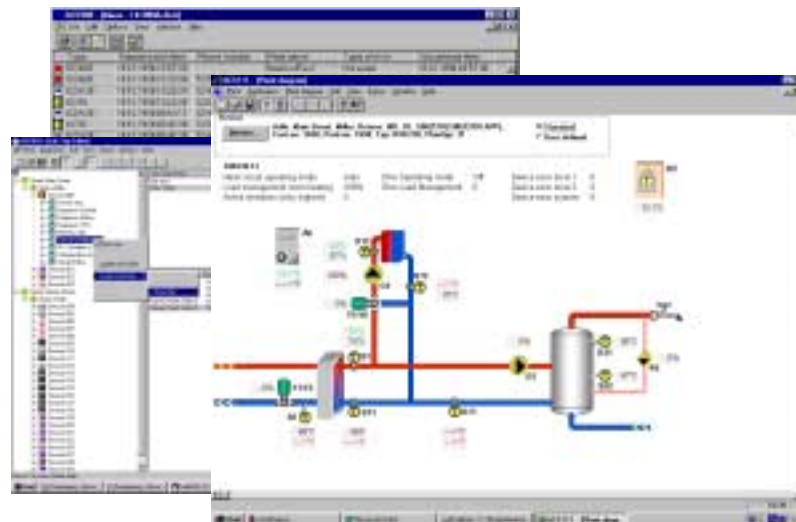

ACS-CD
Version 2.0

1. Preface

These instructions provide information for installing the software package
For operating the individual programs, follow the operating instructions given on the CD-ROM
Windows 95/98 or Windows NT 4.0 must be installed on your PC

2. Contents of the software package

The software package comes as a set in a box and includes:

- The CD-ROM with
 - ACS110 or ACS111 operating software (incl. copy protection)
 - ACT110 service tool (no copy protection)
 - ACS900 alarm software (no copy protection)
 - ACS910 batchjob software (registration file for copy protection must be ordered separately)
 - Documentation
- CMD.01 copy protection
- Diskette with key for the copy protection
- Installation instructions

3. Installation

3.1 Installing the hardware

To establish a connection to the M-bus central unit, connect the PC with the help of a serial cable and a null modem to the M-bus central unit modem via a telephone line to the M-bus central unit

Ensure that the M-bus central unit is appropriately configured:

- Direct connection or modem connection.

Plug the enclosed copy protection into the parallel port of the PC.

If a printer is connected, proceed as follows:

1. Remove the printer cable from the parallel port.
2. Plug the copy protection into the parallel port.
3. Connect the printer cable to the copy protection.

3.2 Installing the software

To load the operating software from the CD to the harddisk, proceed as follows:

1. Insert the CD into the CD drive.
2. The installation program will be started.
3. Select the ACS110, ACS111, ACS900, ACS910 or ACT110 program. The program will now be installed.
4. Click on the Exit button to terminate the installation program.
5. The PC may be restarted to ensure all installed programs will be activated.

3.3 Registration of the operating software

When you first start up the ACS110, ACS111 or ACS910, you will be prompted to insert the diskette with the key for the copy protection into drive A:

1. Insert the diskette.
2. Choose the OK button.

The ACS110, ACS111 or ACS910 will automatically install the key for the copy protection.

4. Rectification of faults

1. When starting up the ACS110, ACS111 or ACS910, the following message appears: Licence number does not agree with that of the copy protection.
Check to ensure the serial number on the inserted hardware key agrees with the serial number on the diskette and with the key for the copy protection.
2. Did you select the correct plant?
3. Is the RS-232 cable correctly connected?
Serial cable: direct connection with null modem; modem connection without null modem.
4. Does the port selected for the plant on the ACS110, ACS111, ACS900, ACS910 or ACT110 agree with that to which the M-bus central unit or the modem is connected?
5. Is the type of connection selected on the M-bus central unit and on the PC correctly configured? (Type of connection: direct connection or modem connection, phone number, modem parameters, etc.).

5. Support

5.1 General notes

If you do not find any notes relating to your specific problem, please refer to the operating instructions of the respective software, depending on the cause of the problem
If you cannot rectify the problem, please get in touch with your Landis & Staefa sales office

5.2 Information for requesting support

If you require support, please have the following information at hand:

- Version number (please refer to «Help» menu, menu item «Info...» or to the back of the CD cover)
 - Precise wording of the fault message
 - Serial number of the copy protection
 - Type of computer you are working with
 - Operating system
- This information will help in solving the problem faster.