

NOTES

Introduction

This booklet will give you easy to follow instructions to allow you to set your BUT2 Timeswitch to the Daily, (same ON/OFF times each day) program.


Contents

- How do I change/set the clock?
- How do I change/set the ON/OFF times?
- How do I review the current ON/OFF times?
- What do the switching options mean?
- How do I select my Switching Options?
- How do I change summer and winter times?
- How do I set my holiday program?
- How do I activate my holiday program?
- What do the buttons do?

To commence programming first press the reset button using a ballpoint pen or similar tool the display should show as next page.

To make it easier to follow the buttons you should be using are coloured grey.

BUT2 Daily



Display will flash as shown at first installation

NOTES

What do the buttons do?

ADV (ADVANCE)



This brings forward the next switching time, for example:-



- (a) if your times were ON 7am and OFF 9am - ON 5pm and OFF 10pm and you pressed the ADV at 4pm your heating would come ON straight away and go OFF at 10pm.
- (b) if your times were ON 7am and OFF 9am - ON 5pm and OFF 10pm and you pressed the ADV at 9pm your heating would go OFF straight away and come ON at 7am the next morning.

+ HRS


This allows you to either increase your heating time in multiples of one hour (up to a maximum of 3 hours) during a timed ON period or to bring on the heating in multiples of one hour (up to a maximum of 3 hours) during an OFF period.




How do I change/set the clock?

- Press top middle button  display shows _____
- Alter time using  buttons to scroll
- When correct time is shown press left hand button ENTER
- Press right hand button EXIT display shows _____




How do I change/set the ON/OFF times?




- Press left hand button MENU
- Press top middle button  until SET PROGRAM is shown
- Press left hand button SELECT display will show _____



(continued on next page)



How do I activate my holiday program?

- Press left hand button MENU SET STATUS is shown, press SELECT
- Press top middle button  until HOLIDAY is shown
- Press left hand button SELECT display will flash as shown _____ your system is now in HOLIDAY mode (OFF) and will countdown the amount of days you have set it for, at the end of which it will automatically go back to your normal set program. You can also press CANCEL to return to normal program mode.




How do I set my holiday program?



- Press left hand button MENU
- Press top middle button \triangle until SET HOLIDAY is shown
- Press left hand button SELECT display shows _____ number of holiday days will flash, change amount of days (1-99) by using \triangle +/ - ∇ , when desired amount of days is in the display press left hand button ENTER, then right hand button EXIT to return to MENU



To change 1st ON time press SELECT, time will flash, change times by using \triangle +/ - ∇ , when desired time is in the display press ENTER display will show _____





- Repeat as above until last OFF time is entered display will show _____ press EXIT to return to MENU



How do I review the current ON/OFF times?


- Press left hand button MENU
- Press top middle button \triangle until REVIEW PROG is shown
- Press left hand button SELECT
- 1st ON time will be shown

(continued on next page)





How do I change winter and summer times?


- Press left hand button MENU
- Press top middle button \triangle until SET TIME is shown
- Press left hand button SELECT
- Alter time using \triangle + / - ∇ buttons until correct time is shown
- When correct time is shown press left hand button ENTER, then press right hand button EXIT to return to MENU display



- Press right hand button BACK
- Press right hand button EXIT
Display shows

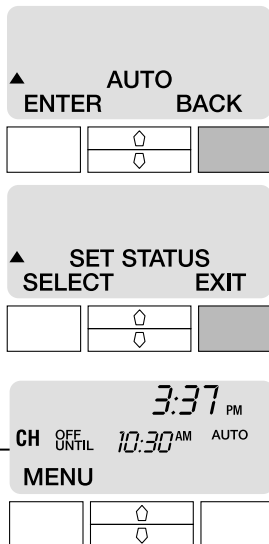

- Press top middle button 
1st OFF will be shown
- Continue above two actions until
last OFF is shown
- Press right hand button BACK
then press again EXIT
(this will return you to MENU)

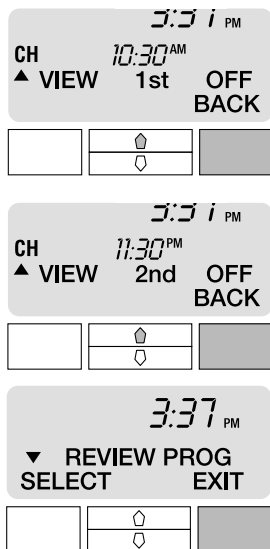

What do the switching options mean?

AUTO

This means that the BUT2 will switch ON and OFF according to the programmed times

MANUAL OFF

This means that the BUT2 will be permanently OFF

MANUAL ON

This means that the BUT2 will be permanently ON

ONCE

This means that the BUT2 will switch ON at the first ON time and switch OFF at the last OFF time you have programmed ignoring any ON/OFF times in between. This is also referred to as All Day.

How do I select my four switching options?

- Press left hand button MENU
Display shows _____
- Press left hand button SELECT
twice, Display shows _____
- Press top middle button \triangle until
your switching option is displayed

AUTO*




MANUAL OFF*

MANUAL ON*

ONCE*

*see previous page for details

- Choose desired option by pressing
ENTER



(continued on next page)