

SIEMENS

Rainproof Combination Metering

Catalog number
MM0202B1150

Panelboard Rating
150 Amps, Max
120/240 Volts ~, 1 phase, 3 wire
208Y/120 Volts ~, 1 phase, 3 wire
(Derived from 3 phase – 4 wire system)

Meter Socket Rating
200 Amps Continuous

**Suitable Only For Use As
Service Equipment**

**For Overhead or Underground
Service**


**Use 60/75° C Copper or
Aluminum Conductor** in Terminals

A, B, N1, N2, N3, and N4.

Main Breaker Terminals

See markings on breaker for torque
requirements and conductor rating

Terminal	Wire Size	Torque
A, B	250 kcmil - #6	275 lb in
N1	#2-#3	50 lb in
	#4-#6	45 lb in
	#8	40 lb in
	#10-#14	35 lb in
N2	250 kcmil - #6	275 lb in
N3	250 kcmil- #4	275 lb in
N4	1/0-#14	120 lb in

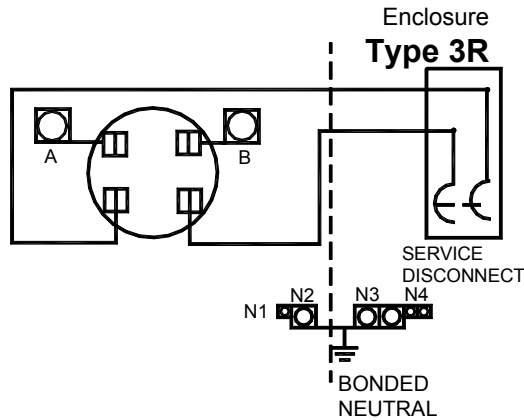

If hub is required, the catalog numbers listed below
may be used on this enclosure

Trade size (in)	Catalog number
1 ¼"	S38597-2
1 ½"	S38598-2
2"	S38599-2
2 ½"	S38600-2

General Information:

Circuit Breakers overload trip position is indicated by
handle position midway between ON and OFF. To reset,
move handle to OFF position then turn ON.

For installation in accordance with all local Electrical codes
and/or the National Electrical Code® .

(J2)

E10703

Short Circuit Current Rating (Wattour Meter not included in short circuit rating)

This panelboard has a Siemens Type QNH or MD-HT (rated 22k AIC) circuit breaker installed and has a maximum short circuit
rating of 22,000 RMS symmetrical amperes, 120/240 volts ~. The actual rating is equal to the lowest rating of any breaker
installed. If the circuit breaker is replaced, use only Siemens Type QNH or MD-HT.

Siemens Energy & Automation, Inc.
Alpharetta, Georgia U.S.A.

Part No. 4099549 Rev E
Assembled in Mexico

Important

This equipment has been designed for use only with Siemens Type QNH or MD-HT Circuit Breakers. Use of
other circuit breakers in this equipment will void the warranty.

Do not spray or allow any petroleum based chemicals, solvents, or paint to contact interior components.

® The National Electrical Code is a recognized trademark of NFPA.