

SIEMENS

Rainproof Combination Metering

Catalog number

MM0202B1150RJBX

Panelboard Rating

150 Amps, Max

120/240 Volts ~, 1 phase, 3 wire

208Y/120 Volts ~, 1 phase, 3 wire

(Derived from 3 phase – 4 wire system)


Meter Socket Rating

200 Amps Continuous

Suitable Only For Use As

Service Equipment

For Overhead or Underground Service

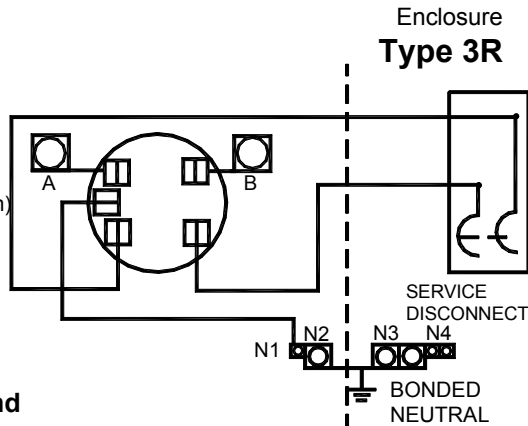

Use 60/75° C Copper or

Aluminum Conductor in Terminals

A, B, N1, N2, N3, and N4.

Main Breaker Terminals

See markings on breaker for torque requirements and conductor rating

If hub is required, the catalog numbers listed below may be used on this enclosure

Trade size (in)	Catalog number
1 ¼"	S38597-2
1 ½"	S38598-2
2"	S38599-2
2 ½"	S38600-2

Terminal	Wire Size	Torque
A, B	250 kcmil - #6	275 lb in
N1	#2-#3	50 lb in
	#4-#6	45 lb in
	#8	40 lb in
	#10-#14	35 lb in
N2	250 kcmil - #6	275 lb in
N3	250 kcmil- #4	275 lb in
N4	1/0-#14	120 lb in

General Information:

Circuit Breakers overload trip position is indicated by handle position midway between ON and OFF. To reset, move handle to OFF position then turn ON.

For installation in accordance with all local Electrical codes and/or the National Electrical Code® .



E10703

Short Circuit Current Rating (Wattour Meter not included in short circuit rating)

This panelboard has a Siemens Type QNH or MD-HT (rated 22k AIC) circuit breaker installed and has a maximum short circuit rating of 22,000 RMS symmetrical amperes, 120/240 volts ~. The actual rating is equal to the lowest rating of any breaker installed. If the circuit breaker is replaced, use only Siemens Type QNH or MD-HT.

Siemens Energy & Automation, Inc.
Alpharetta, Georgia U.S.A.

Part No. 4099676 Rev. B
Assembled in Mexico

Important

This equipment has been designed for use only with Siemens Type QNH or MD-HT Circuit Breakers. Use of other circuit breakers in this equipment will void the warranty.

Do not spray or allow any petroleum based chemicals, solvents, or paint to contact interior components.

® The National Electrical Code is a recognized trademark of NFPA.