

# Installation Instructions

Instructions for changing to  
400A dual connector lug kit PLK400

This Kit Is Suitable For Use  
In Siemens SP4XXX Series  
and Murray MP4XXX Series  
Meter Centers



**! DANGER**

Hazardous Voltage.  
Will cause death, serious injury  
or substantial property damage.

Turn off power supplying this  
equipment before working inside.

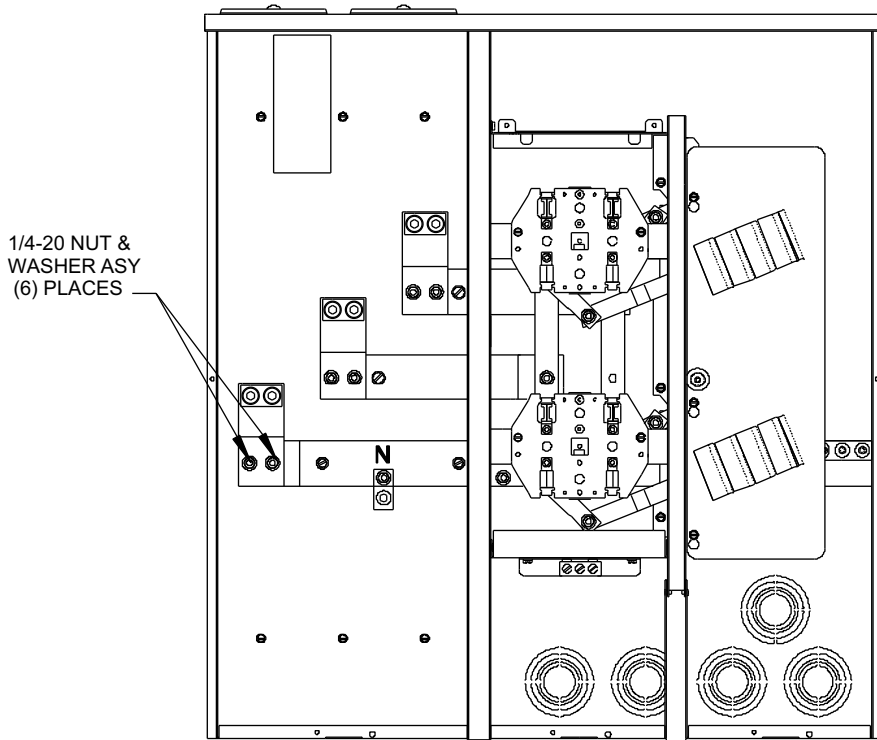


Figure 1  
Underground Feed

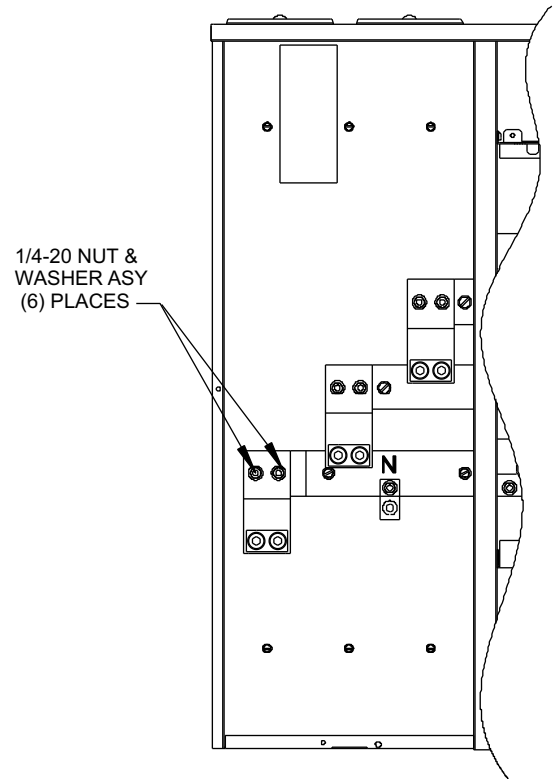


Figure 2  
Overhead Feed



## SAFETY INSTRUCTIONS

1. Remove 1/4-20 nut & washer assembly as shown in Figure #1 (Retain hardware).
2. Remove each bus with connector attached and reassemble with bus assembly from kit (As shown in Figure #1 or #2 depending on service).
3. Torque all 1/4-20 nut & washer assemblies to 60-85 Lb-In.
4. Connectors supplied with kit have wire range of #6-250 kcmil CU7AL. Torque 275 Lb-in