

Rainproof Combination Metering

Catalog Number **JA2442B1400SDB**

Enclosure
Type 3R

Class CTL Panelboard

Device Rating: 400 Amp, Max; 120/240 Volts ~, 1 phase, 3 wire

Meter Socket Rating: 400 Amp Max. 320 Amp Continuous

For installation by Qualified Person in accordance with all local electrical codes and/or the National Electrical Code.®

Suitable Only For Use As Service Equipment

For Underground Service Only

Terminals Suitable for 60°/75° C Copper or Aluminum Conductor

Unused neutral branch terminals may be used to terminate equipment grounding wires in the combinations indicated for equipment ground bar terminals.

General Information:

Circuit breaker trip position is indicated by handle position midway between ON and OFF. To reset, move handle to OFF position then turn ON.

Sum of MP-T, MP-HT or MP-MT breaker rating is not to exceed 140 amps per branch circuit bus stab.


Any MP-T, MP-HT or MP-MT breaker 100 Amps or more must be connected to the bottom two stabs.

Load, Neutral and Ground* Terminals:

Terminal	Wire Size	Torque
A) H56425	(2) #6-350kcmil	275 lb-in
B) H56477	3/0-800kcmil	500 lb-in
N) H56732	(2) #4-350kcmil	275 lb-in
H56476	3/0-800kcmil	500 lb-in
N1	300 Kcmil - #4	250 lb-in.
G1	2/0 - #14	50 lb-in.
Branch Breaker Terminals	See Markings on Breaker	
Neutral Bar/ Ground Bar (1/0-14)	#10 - #14 CU #10 - #12 AL #8 1/0 - #6	35 lb-in 35 lb-in 40 lb-in 45 lb-in
Neutral Bar/ Ground Bar (6-14)	#10 - #14 CU #10 - #12 AL #8 #6	20 lb-in 20 lb-in 25 lb-in 35 lb-in

* Only Equipment Ground Terminals may use more than one wire per terminal.

Ground Terminal Size	Wire Range	Torque
1/0-#14	(2 or 3) #12-14 CU,	35 lb-in
	(2 or 3) #10-12 AL,	35 lb-in
	(2) #10 CU	35 lb-in
#6-#14	(3) #10 CU	50 lb-in
	(2) #12-14 CU,	20 lb-in
#4-#14 (ECGB)	(2) #12AL	20 lb-in
	(1, 2 or 3) #14,	20 lb-in
	(1 or 2) #12-#10	20 lb-in
	#8	25 lb-in
#6-#4		35 lb-in

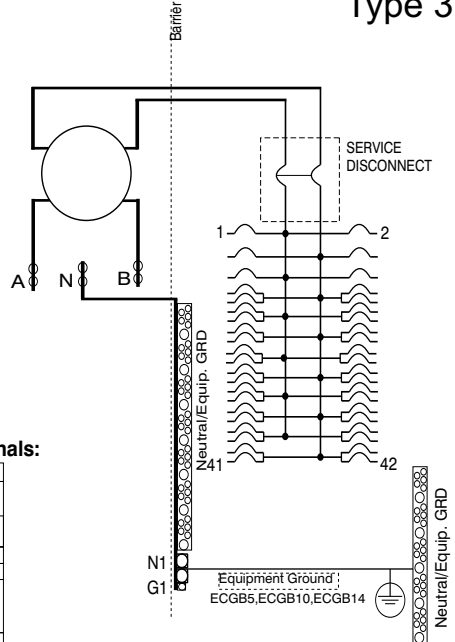

WARNING:
Removal of meter does not de-energize circuit when By-Pass provided.

If hub is required, use the catalog numbers listed below:

Trade size (in)	Catalog number
HD Type Hub (Top and Bottom Endwall) (Top Hub Opening Available Only On Surface Mounted Devices)	
2"	EC56854
2 1/2"	EC56855
3"	EC56856
3 1/2"	EC56857
4"	EC56858
Closure Plate	EC56933S

Line Terminals:

Provisions for UL listed one or two hole NEMA mounting terminals. Compression terminals to #750 kcmil, single conductor, ILSCO type ACL or 2ACL. Installation Tool : THOMAS & BETTS # TBM8 for #10-350kcmil(AL), #8-500kcmil(CU) TBM8-750M-1 for #8-750kcmil(CU/AL)

Tightening Torques:

5/16" Nuts (1/2" Drive).....130-140 in-lbs
3/8" Nuts (9/16" Drive).....240-260 in-lbs
1/2" Nuts (3/4" Drive).....490-540 in-lbs

Manual By-Pass Nut

Torque 130-140 in-lbs

Accessories:

Filler Plate QF3 or ECQF3
600 Amp Main Breaker JXD22B400
LUG #6-350 kcmil H56425
LUG 3/0-800 kcmil H56477
LUG #4-350 kcmil H56732
LUG 3/0-800 kcmil H56476
Flush Rail Kit ECFRK1
Mechanical Interlock ECQML12
K4 By Pass H56495
LUG KIT #2-2/0 ECLK2125

Short Circuit Current Rating (Wattour Meter not included in short circuit rating)

This panelboard has a short circuit current rating of 22,000 Amps RMS symmetrical, 120/240 V~. The correct branch circuit breakers and main/branch breaker series combinations to be used for various short circuit current levels are listed in the tabulation below. Any circuit breaker installed, replaced, or added in this panelboard must be manufactured by Siemens and must be of the correct type as indicated in the tabulations below.

PANELBOARD MAIN	BRANCH BREAKER	Then the maximum short circuit current rating in RMS Symmetrical Amperes 120/240V AC is
When the installed panelboard main breaker is a Siemens type	And the branch breakers installed are type	
JXD2-A	MP-T, MH-T, MP-GT, MP-ET, MP-AT, MD-TR	10,000
	MP-HT, MP-MT, MP-HGT, MP-HET, MP-HAT, MD-TR, MD-HTR	22,000

MANUFACTURING DATE:

J2

4099933 REV. G

Important Do not spray or allow any petroleum based chemicals, solvents, or paint to contact interior components.

©The National Electrical Code is a registered trademark of the National Fire Protection Association.

©2007 Copyright Siemens Energy & Automation, Inc.

Murray Electrical Products
Siemens Energy & Automation, Inc.
Alpharetta, Georgia U.S.A.

ASSEMBLED IN MEXICO

MURRAY