

Rainproof Combination Metering

Catalog number
JC0202B1200RJB

Enclosure
Type 3R

Panelboard Rating
 200 Amps, Max
 120/240 Volts ~, 1 phase, 3 wire
 208Y/120 Volts ~, 1 phase, 3 wire
 (Derived from 3 phase – 4 wire system)


Meter Socket Rating
 200 Amps Continuous

**Suitable Only For Use As
 Service Equipment**

**For Overhead or Underground
 Service**

**Use 60/75° C Copper or
 Aluminum Conductor** in Terminals
 A, B, N1, N2, N3, and N4.

Main Breaker Terminals
 See markings on breaker for torque
 requirements and conductor rating

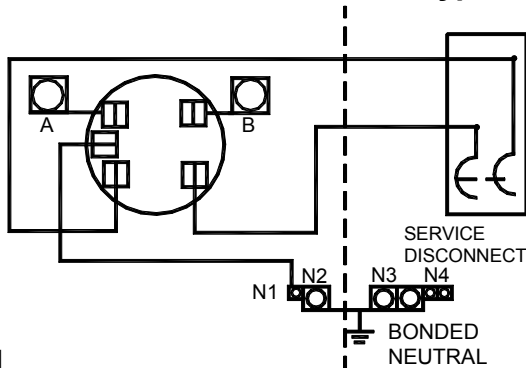

If hub is required, the catalog numbers listed below may be used on this enclosure

Trade size (in)	Catalog number
1 ¼"	RX125
1 ½"	RX150
2"	RX200
2 ½"	RX250

General Information:

Circuit Breakers overload trip position is indicated by handle position midway between ON and OFF. To reset, move handle to OFF position then turn ON.
 For installation in accordance with all local Electrical codes and/or the National Electrical Code® .



E10703

Terminal	Wire Size	Torque
A, B	250 kcmil - #6	275 lb in
N1	#2-#3	50 lb in
	#4-#6	45 lb in
	#8	40 lb in
	#10-#14	35 lb in
N2	250 kcmil - #6	275 lb in
N3	250 kcmil- #4	275 lb in
N4	1/0-#14	120 lb in

Short Circuit Current Rating (Wattour Meter not included in short circuit rating)

This panelboard has a Siemens Type MD-HT or QNH (rated 22k AIC) circuit breaker installed and has a maximum short circuit rating of 22,000 RMS symmetrical amperes, 120/240 volts ~. The actual rating is equal to the lowest rating of any breaker installed. If the circuit breaker is replaced, use only Siemens Type MD-HT or QNH.

Assembled in Mexico

Part No. 4099547 Rev D

Important

This equipment has been designed for use only with Siemens Type MD-HT or QNH Circuit Breakers. Use of other circuit breakers in this equipment will void the warranty.

Do not spray or allow any petroleum based chemicals, solvents, or paint to contact interior components.

® The National Electrical Code is a recognized trademark of NFPA.

Murray Electrical Products

Siemens Energy & Automation, Inc.
 Alpharetta, Georgia U.S.A.

