





REVISION	DATE	BY	DATE	BY
		DRAWN	17/05/25	PP
		CHEK'D		
		VERIF'D		

Confidential - Property of Siemens Industry, Inc.	
CUSTOMER	
ORDER NO.	DWG. NO. 1D1Y015CTP1-T
	SH 1 OF 3

SIEMENS

<p>CATALOG NO. 1D1Y015CTP1-T</p> <p>SERIAL NO.</p> <p>15 kVA 60 Hz 1 PHASE</p> <p>5.2 % IMP AT 170 °C</p> <p>150 °C RISE 30 °C AVG. AMBIENT</p> <p>220 °C TEMP CLASS 40 °C MAX. AMBIENT</p> <p>PRIMARY (H1 H3 H2 H4) 240X480V V 10 kV BIL</p> <p>SECONDARY(X4 X2 X3 X1) 120/240V V 10 kV BIL</p> <p>WINDING MATERIAL CU</p> <p>ENCLOSURE TYPE 3R WEIGHT 175 LBS</p> <p>ENERGY EFFICIENCY CSA C802.2-12</p> <p>DOE 10 CFR PART 431:2016</p> <p>SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES</p>	<p>TYPE F</p> <p> LISTED</p> <p>DRY TYPE TRANSFORMER E112513</p> <p> LR 3902</p> <p>SEISMIC QUALIFICATIONS FLOOR MOUNT ONLY OSP-0136-10 IBC 2012/ASCE 7-10 SDS<=2.0g Z/h=1 Ip=1.5</p>	 <p style="text-align: center; font-size: 0.8em;">HAM1497</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 0.8em;"> <tr> <th style="width: 15%;">VOLTS</th> <th style="width: 85%;">INPUT LINE ON H1, H4</th> </tr> <tr> <td>504</td> <td>H2-1, H3-2</td> </tr> <tr> <td>492</td> <td>H3-2, H2-3</td> </tr> <tr> <td>480</td> <td>H2-3, H3-4</td> </tr> <tr> <td>468</td> <td>H3-4, H2-5</td> </tr> <tr> <td>456</td> <td>H2-5, H3-6</td> </tr> <tr> <td>444</td> <td>H3-6, H2-7</td> </tr> <tr> <td>432</td> <td>H2-7, H3-8</td> </tr> <tr> <td colspan="2" style="text-align: center;">CONNECT</td> </tr> <tr> <td colspan="2" style="text-align: center;">CONNECT H2 TO H3 FOR SERIES PRIMARY</td> </tr> <tr> <th style="width: 15%;">VOLTS</th> <th style="width: 85%;">INPUT LINE ON H1&H3, H2&H4</th> </tr> <tr> <td>252</td> <td>H2-1, H3-2</td> </tr> <tr> <td>240</td> <td>H2-3, H3-4</td> </tr> <tr> <td>228</td> <td>H2-5, H3-6</td> </tr> <tr> <td>216</td> <td>H2-7, H3-8</td> </tr> <tr> <td colspan="2" style="text-align: center;">CONNECT H1 TO H3 AND H2 TO H4 FOR PARALLEL PRIMARY</td> </tr> <tr> <th style="width: 15%;">VOLTS</th> <th style="width: 85%;">CONNECT</th> </tr> <tr> <td>120</td> <td>X1-X3, X2-X4</td> </tr> <tr> <td>240</td> <td>X2-X3</td> </tr> <tr> <td>120/240</td> <td>X2-X3</td> </tr> <tr> <td></td> <td>X1, X2 or X3, X4</td> </tr> <tr> <td></td> <td>X1-X2-X4</td> </tr> </table>	VOLTS	INPUT LINE ON H1, H4	504	H2-1, H3-2	492	H3-2, H2-3	480	H2-3, H3-4	468	H3-4, H2-5	456	H2-5, H3-6	444	H3-6, H2-7	432	H2-7, H3-8	CONNECT		CONNECT H2 TO H3 FOR SERIES PRIMARY		VOLTS	INPUT LINE ON H1&H3, H2&H4	252	H2-1, H3-2	240	H2-3, H3-4	228	H2-5, H3-6	216	H2-7, H3-8	CONNECT H1 TO H3 AND H2 TO H4 FOR PARALLEL PRIMARY		VOLTS	CONNECT	120	X1-X3, X2-X4	240	X2-X3	120/240	X2-X3		X1, X2 or X3, X4		X1-X2-X4
VOLTS	INPUT LINE ON H1, H4																																													
504	H2-1, H3-2																																													
492	H3-2, H2-3																																													
480	H2-3, H3-4																																													
468	H3-4, H2-5																																													
456	H2-5, H3-6																																													
444	H3-6, H2-7																																													
432	H2-7, H3-8																																													
CONNECT																																														
CONNECT H2 TO H3 FOR SERIES PRIMARY																																														
VOLTS	INPUT LINE ON H1&H3, H2&H4																																													
252	H2-1, H3-2																																													
240	H2-3, H3-4																																													
228	H2-5, H3-6																																													
216	H2-7, H3-8																																													
CONNECT H1 TO H3 AND H2 TO H4 FOR PARALLEL PRIMARY																																														
VOLTS	CONNECT																																													
120	X1-X3, X2-X4																																													
240	X2-X3																																													
120/240	X2-X3																																													
	X1, X2 or X3, X4																																													
	X1-X2-X4																																													
<p>NEMA Class ANN Dry Type Transformer</p> <p style="text-align: right;">Siemens Industry, Inc. Norcross, GA <small>csu0086e3</small></p>																																														

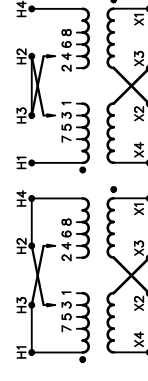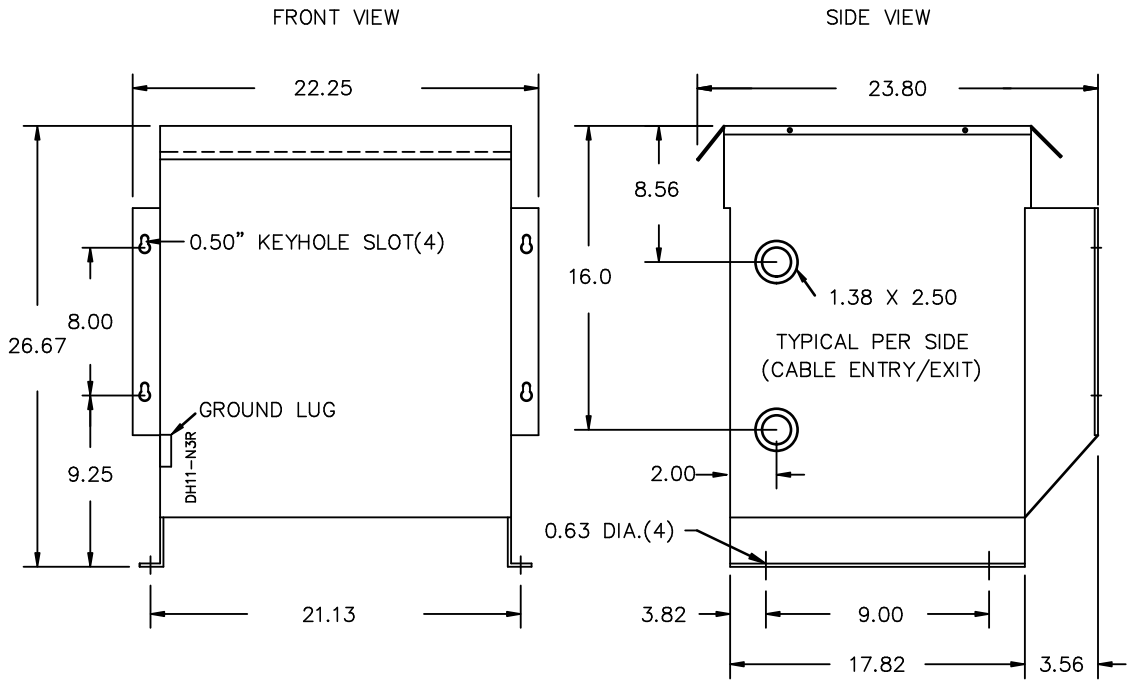

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY - OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE


CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT

Confidential - Property of
Siemens Industry, Inc.

REVISION	DATE	BY	DATE	BY
			17/05/25	PP

CUSTOMER	
ORDER NO.	DWG. NO.
	1D1Y015CTP1-T

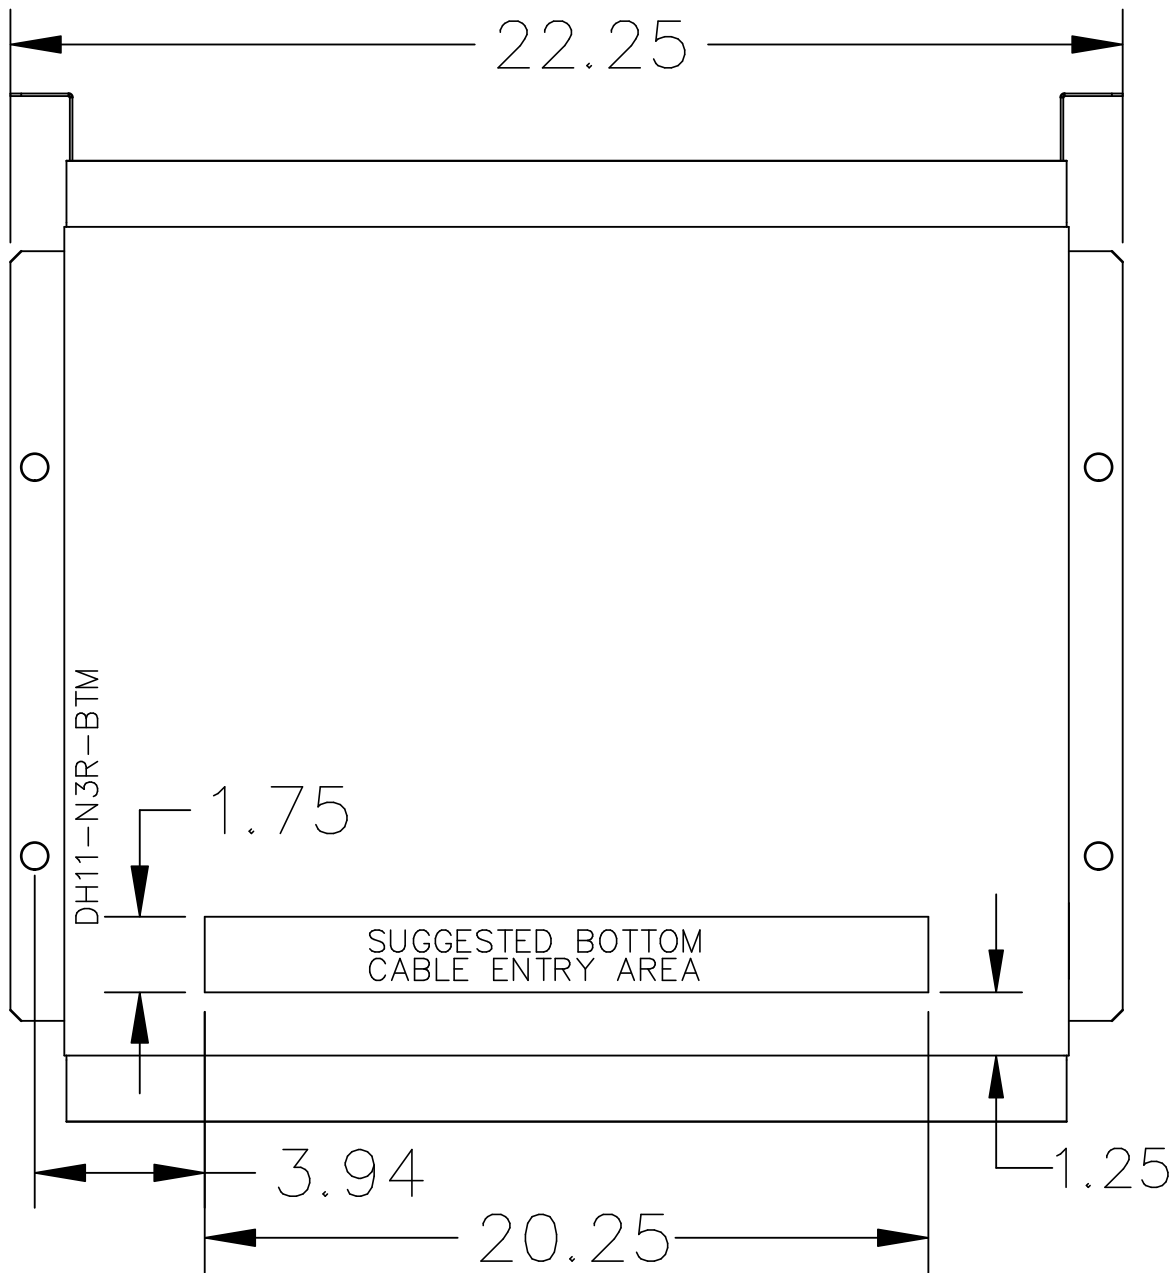

NOTE:
 WHEN BOTTOM CABLE ENTRY IS OPTED, THE SPACE USED FOR CONDUITS IN THE FRONT OF THE TRANSFORMER SHOULD NOT OBSTRUCT MORE THAN 50% OF THE FRONT AIR INTAKE AREA DEFINED BETWEEN THE BOTTOM PLATE AND THE SUPPORTING LEGS.
 SEE MANUAL FOR ADDITIONAL INFORMATION

Confidential - Property of
 Siemens Industry, Inc.

REVISION	DATE	BY	DATE	BY
		DRAWN	17/05/25	PP
		CHEK'D		
		VERIF'D		

CUSTOMER	
ORDER NO.	DWG. NO. 1D1Y015CTP1-T
SH 3 OF 3	