

# SIEMENS

LPLOCK01A (for 14 gage doors)

LPLOCK02A (for 12 gage doors)


LPLOCK03A (for 10 gage doors)






Installation Instructions for replacement panelboard locks for doors with holes measuring  $3.120'' \pm 0.000'' \text{H} \times 1.135'' \pm 0.005'' \text{W}$ .  
KIT INCLUDES: Qty. (1) Replacement Lock (either p/n: 11-1895-01, 11-1895-02 or 11-1895-03) and Qty. (2) Keys (p/n: B363A)

1. Lock off ALL power supplying this equipment before working on it.
2. If lock is missing, proceed to step 3. Otherwise, remove and discard old or damaged lock from panelboard door by squeezing the plastic catches on the backside of the lock and pushing the lock out through the opening.
3. Orient the new panelboard lock such that the rear of the lock faces the front of the door and place it into the rectangular door opening by angling the bottom into place.
4. With a rubber mallet, gently tap near the top of the front of the lock body to "pop" the top into place.
5. Review installation to ensure that the back face of the lock flange is flush with the door. If not, gently tap the lock body until it is.
6. Test that the door opens and closes easily and that the lock mechanism fully engages the latch hole in the door frame.
7. Test BOTH keys (included) to ensure they properly lock the door for safety and security.
8. **Before energizing the panel**, ensure that any barriers and fillers are in place and secure, that the trim is properly in place, and the door is closed and locked.

## Door CLOSED

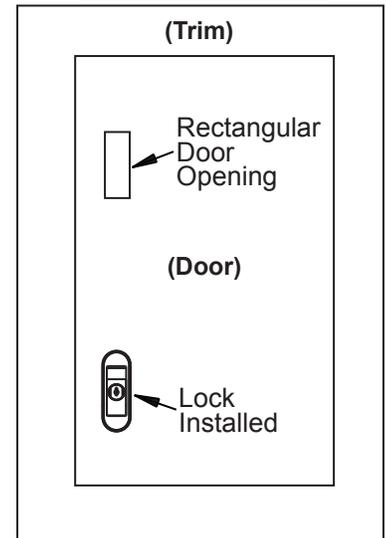

## Door OPEN

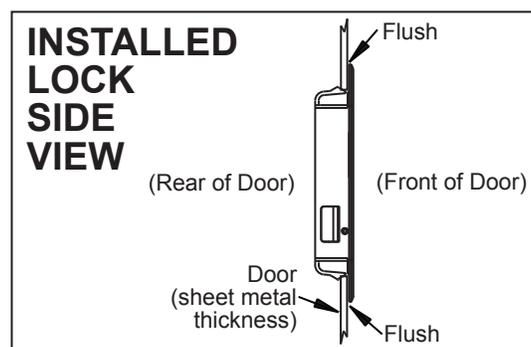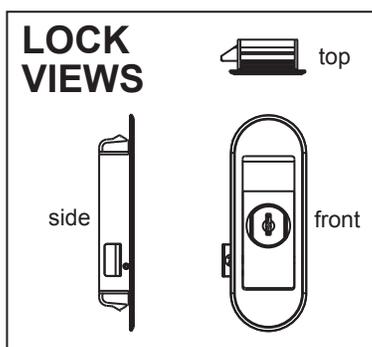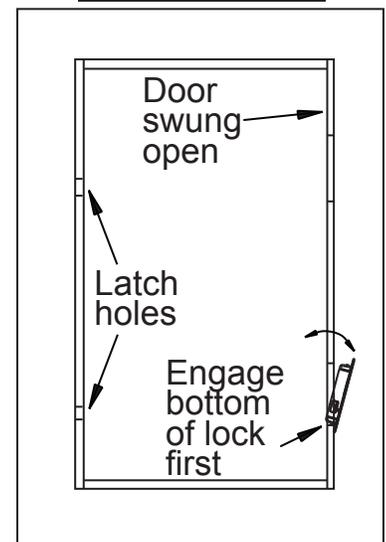

Contact Siemens Sales Office if considering usage in applications other than as shown.

These instructions do not purport to cover all details or variations in equipment, or to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise, which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the local Siemens sales office. The contents of this Instruction manual shall not become part of or modify any prior or existing agreement, commitment or relationship. The sales contract contains the entire obligation of Siemens. The warranty contained in the contract between the parties is the sole warranty of Siemens. Any statements contained herein do not create new warranties or modify the existing warranty.

Trademarks-Unless otherwise noted, all names identified by © are registered trademarks of Siemens AG or Siemens Industry, Inc. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.