

| REVISION | DATE | BY | DATE | BY |
|----------|------|---------|----------|----|
| | | DRAWN | 16/01/21 | PP |
| | | CHEK'D | | |
| | | VERIF'D | | |

| | | |
|---|-----------|-------------------|
| Confidential - Property of Siemens Industry, Inc. | | |
| CUSTOMER | ORDER NO. | DWG. NO. |
| | | 3F3Y015FESCLN3D16 |
| | | SH 1 OF 2 |

SIEMENS

CATALOG NO. 3F3Y015FESCLN3D16
SERIAL NO. SERIES H
15 kVA **60** Hz **3** PHASE
3.9 % IMP AT **135** °C


115 °C RISE **30** °C AVG. AMBIENT
220 °C TEMP CLASS **40** °C MAX. AMBIENT

PRIMARY (H1 H2 H3) **480V** V **10** kV BIL
SECONDARY(X0 X1 X2 X3) **208Y/120V** V **10** kV BIL

WINDING MATERIAL **CU**
ENCLOSURE TYPE **3R** WEIGHT **215** LBS
ENERGY EFFICIENCY **EXCEEDS CSA** DOE 10 CFR PART 431:2016
C802.2-2012

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE, PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES ELECTROSTATIC SHIELD
SOUND LEVEL IS 3 DB LOWER THAN NEMA ST20 REQUIREMENTS


SUITABLE FOR INDOOR OR OUTDOOR LOCATIONS BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION MANUAL
NEMA Class **ANN** Dry Type Transformer

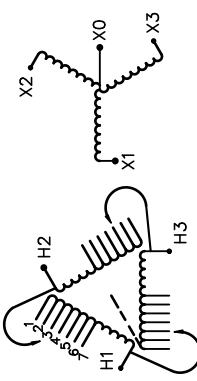

VOLTS CONNECT


504
492
480
468
456
444
432

1
2
3
4
5
6
7



LISTED

DRY TYPE TRANSFORMER
7705
E112313



LR 3902


TYPE **K**

SEISMIC QUALIFICATIONS, FLOOR MOUNT ONLY
OSP-0136-10 IBC 2012/ASCE 7-10
SDS<=2.0g Z/h=1 Ip=1.5

Siemens Industry, Inc. Norcross, GA dsu0066e



3F3Y015FESCLN3D16

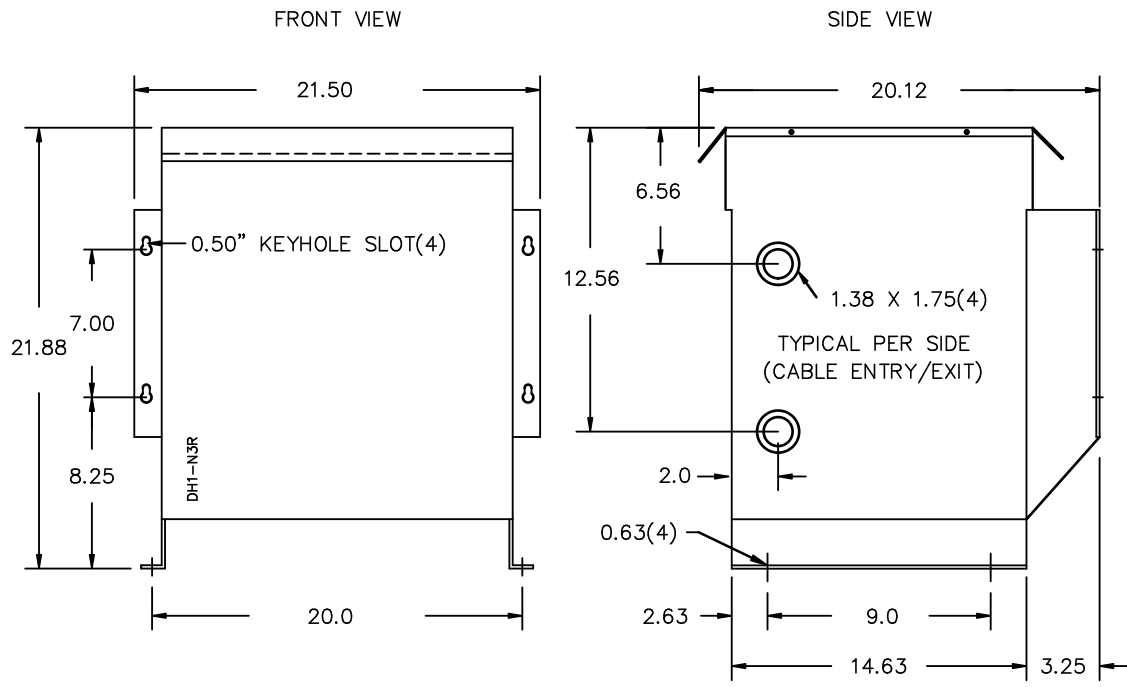

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT

Confidential - Property of
Siemens Industry, Inc.

| REVISION | DATE | BY | DATE | BY |
|----------|------|----|----------------|----|
| | | | DRAWN 16/01/21 | PP |
| | | | CHEK'D | |
| | | | VERIF'D | |

CUSTOMER

ORDER NO.

DWG. NO.

3F3Y015FESCLN3D16

SH 2 OF 2